


Lii-100

Smart Multifunctional Battery Charger

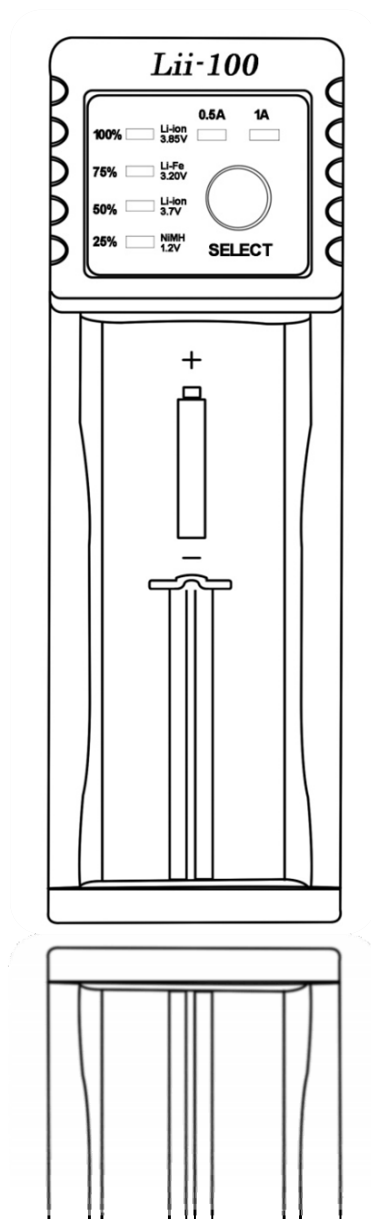

This charger is designed for portable use. It can detect the battery type and charge the battery automatically under your control. It has a USB output of 5V/100mAh.

It can detect the battery type and charge the battery automatically under your control. It has a USB output of 5V/100mAh.




Интернет-магазин светодиодных фонарей

Features:

- One-slot charging and management system, Micro USB DC 5V input port
- 500mAh/1000mAh charging current for selection
- Built-in LED indicator shows the charging status 25% - 50% - 75% - 100%
- Identify Li-ion and Ni-MH battery automatically
MUST fix the charging mode to **Li-Fe** when you charge LiFePO4 battery or 3.85V Li-Ion battery
(Identify 1.2V Ni-MH/3.7V Li-ion battery automatically and select manually for 3.85V battery Li-ion and LiFePO4 battery)
- Refresh function for 0V battery
- **CAN'T charge battery type of 1.6-2.2V**
- Over-charging and over-discharge protection
- Identify broken/defective battery
- Polarity- reverse protection
- Charging under constant voltage and current
- Built with 5V/1000mAh output port

Operations:

- There's a 'SELECT' button for choosing the charging mode and charging current
 - ◆ Long press the 'SELECT' button for 3 seconds to change the charging current, you can change the charging current at any time
 - ◆ Short press the 'SELECT' button to change the charging mode, it can identify the 1.2V/3.7V li-ion and Ni-MH automatically. You need to change the mode for 3.85V li-ion and LiFePO4 battery
 - ◆ It begins to charge the battery 5 seconds after your settings

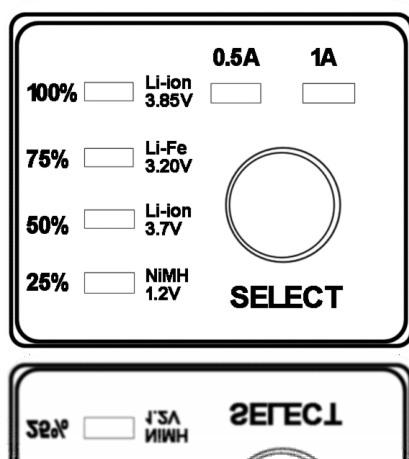

- Connect the 5V input port with USB cable, the LED indicator of 0.5A on when no battery is inserted. When broken battery inserted, the charge will have no any response.
- LED indicators keeps flickering when a broken battery is inserted
- It can show the battery type by click the 'SELECT' button at any time during charging

- ◆ Output voltage: 4.2V \pm 1% / 5V
- ◆ Output current: 500mAh / 1000mAh
- ◆ Constant charging with cut-off current less than 100mAh
- ◆ Standby current: No more than 15mAh

OUT:5V

- ◆ USB output open-circuit voltage:4.90-5.30V
- ◆ Output voltage: 1000mAh and output voltage is 4.75-5.25V
- ◆ Cut-off voltage for output: 3.0 \pm 0.1V;

Compatible Batteries:

- ◆ Li-ion / IMR: 18650, 18490, 18350, 17670, 17500, 16340(RCR123), 14500, 10440

Size(cm)/Weight(grams):

- ◆ Length 112mm x Width 37mm x Height 32mm
- ◆ 45 grams (charger) + 17grams (USB cable) included in delivery



Design and made in China

Contact distributor for more information or support



Интернет-магазин светодиодных фонарей

По всем вопросам просим обращаться к представителю Liito-Kala:

Интернет-магазин KupiFonar.kz

www.kupifonar.kz

тел.: 8 (727) 296-97-64

info@kupifonar.kz