

PRODUCT  
CATALOG **2019**




**FENIX**<sup>®</sup>

LIGHTING FOR EXTREMES




**FENIX LIGHTING US** is the United States distributor for the Fenix® line of lighting products. Based in Shenzhen, China, Fenix creates unique products in a company-owned facility under close scrutiny from quality assurance professionals. Unlike contract manufacturers or subcontractors, Fenix owns the performance of each and every light. From owners to employees, the talented team is out to replicate the craftsmens' eye for function, fit and finish. Those high standards flow from design to production to quality assurance.

## THE FENIX CONSTRUCTION

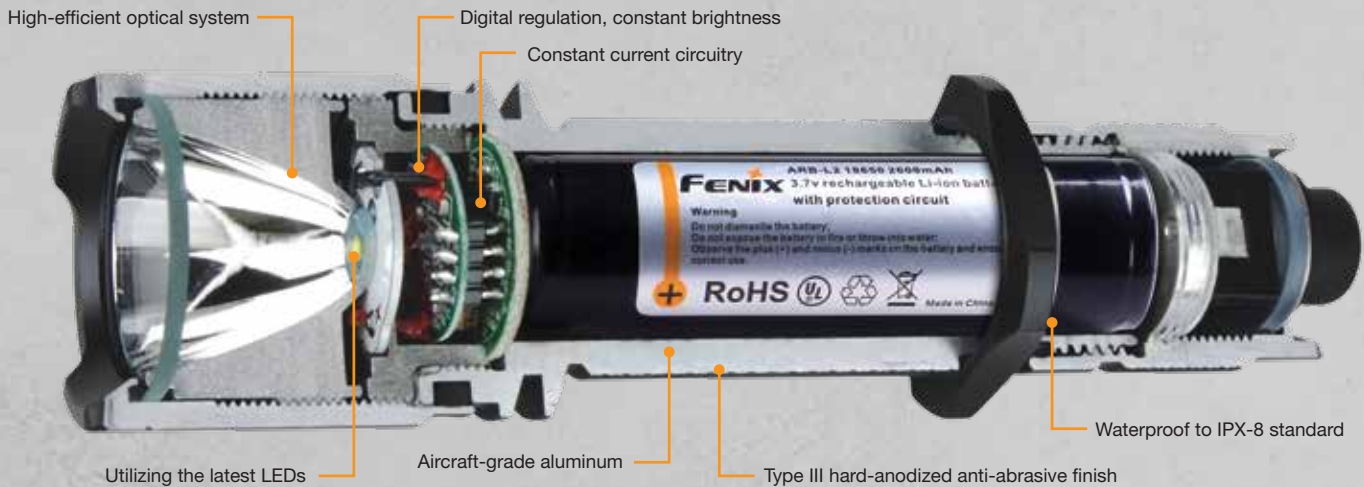

## THE FENIX PROTOCOL™ GOES BEYOND







By adding up to eight extra testing steps, the FENIX PROTOCOL puts devices in situations that more closely mirror the flashlight users' reality through a) shakeout, b) bending, c) salty spray, d) ultraviolet radiation, e) environmental, f) vibration, g) switch and h) temperature testing.

			
<b>SHAKEOUT TEST</b>	<b>BENDING TEST</b>	<b>SALTY SPRAY TEST</b>	<b>ULTRAVIOLET RADIATION TEST</b>
evaluates the scratch and wear resistance of the flashlight's surface	challenges the bending degree and inherent strength of internal wiring systems	puts the light into corrosion-provoking conditions beyond what most will ever face	monitors the light's performance after intense exposure to UV radiation
			
<b>ENVIRONMENTAL TEST</b>	<b>VIBRATION TEST</b>	<b>SWITCH TEST</b>	<b>TEMPERATURE TEST</b>
pushes low and high temperature ranges to verify performance at extremes	jars the light over thousands of cycles to validate resistance to rigorous forces	checks switch function well over the projected lifespan of the light	determines heat generation and dissipation of Fenix' powerful LED systems



## HIGHER STANDARDS = BETTER FLASHLIGHT PERFORMANCE

ANSI package symbols make it easier to buy with confidence. Six baseline tests allow flashlight users to compare essential performance attributes. While not a comprehensive evaluation of individual lights, ANSI FL-1 Standards are the start of intelligent buying.

	<p><b>LIGHT OUTPUT</b> measures total quantity of light energy = how BRIGHT it appears. Three samples are tested with fresh batteries for output measured in lumen</p>		<p><b>PEAK BEAM INTENSITY</b> measures the brightest point = how STRONG the light is. Lux levels at 2, 10 or 30 meters are taken within the first 2 min of operation</p>
	<p><b>RUNTIME</b> measures hours to 10% brightness = how LONG batteries last. Fresh batteries are run at the light's maximum brightness level and other levels</p>		<p><b>IMPACT RESISTANCE</b> checks function when dropped = how HIGH a drop it can take. Six drops are made at different angles starting at one meter</p>
	<p><b>BEAM DISTANCE</b> measures where the light diminishes = how FAR the light shines. Rated distance – in meters – is where a luxmeter detects 0.25 lux</p>		<p><b>WATER RESISTANCE</b> checks the light's dependability = how RESISTANT it is to water. Splashing, temporary or total immersion are tested immediately after 30 minutes of exposure</p>

### MERCHANDISE RETURNS

Merchandise may not be returned without the prior approval of Fenix Lighting US. Please contact customer service with any inquires you have on product that was shipped in error or is found to be defective in workmanship and quality. If a customer returns product to same retailer of purchase, then the retailer has the ability to satisfy their consumer directly or refer to our customer service department. In the event the retailer exchanges product to satisfy the consumer, then the retailer may return the faulty product exchanged by consumer for credit or equal replacement product by contacting customer service.

### REPAIR POLICY

If your Fenix product has a manufacturer's defect covered by our warranty, we will either repair or replace it, at our option, without charge. Return it to your place of purchase or send it to the address below. Please include your 1) name, 2) address, 3) phone number and 4) email address (optional) with the product.

Most damaged Fenix products not covered by the warranty can still be repaired. If repair costs and handling charges apply, you will be notified prior to any service. Please send to the address below. Include your 1) name, 2) address, 3) phone number and 4) e-mail address (optional) with the product.

All warranty repairs or replacements are at the sole discretion of the Fenix Lighting US Authorized Repair Center and we reserve the right to refuse a request for any reason.

### LIFETIME LIMITED WARRANTY

Fenix Lighting US, guarantees all Fenix products purchased from retailers directly supported by them to be made of first-class materials and therefore provides a lifetime warranty against any defects in material and workmanship.

Excluded from warranty coverage is any damage to the exterior deemed reasonable wear and tear such as scratches and/or fading of color. In addition, the warranty does not apply to damage caused by abnormal or unreasonable use of any of the components. This includes use of unapproved batteries in Fenix products (see user manuals). This warranty is in place of all other warranties, including warranty of fitness for a particular purpose and warranty of merchantability and excludes any liability for incidental or consequential damages.

### LIMITATION OF LIABILITY

The liability of Fenix Lighting US in regards to the sale and delivery of goods according to the invoice is limited to repair and replacement of, or credit for, defective goods, at the option of Fenix Lighting US. Under no circumstances shall Fenix Lighting US be liable for economic loss or for any other special, indirect, incidental or consequential damages, of any kind suffered by purchaser.

### FENIX LIGHTING US PROMISE

We promise to support you (the retailer) and your consumers to deliver the highest level of satisfaction. That means taking responsibility for promptly solving product, service or warranty problems. If, as a retail partner, you are not satisfied with the service you have received at any time, then please contact us directly at customerservice@fenixlighting.com. The goal remains your satisfaction – and success – as a key member of the Fenix Lighting US retail network.

#### CUSTOMER SERVICE/ORDERS

##### HOURS OF OPERATION

7:00 am to 4:00 pm MST

Toll Free: 888-775-9996

Fax: 888-775-9991

Email:

customerservice@fenixlighting.com

#### FENIX LIGHTING US HEADQUARTERS

##### BILLING ADDRESS

10488 W. Centennial Rd. #301

Littleton CO 80127

#### SERVICE REPAIR CENTER & WAREHOUSE LOCATION

161 Market Street

Monticello, AR 71655



**BEST SELLER**


# E12

130 LUMENS

- ◆ Max 130 lumen output from one AA battery
- ◆ Three brightness levels
- ◆ Twist switch

OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- ARB-L14 USB Battery



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	8	22h	289ft (88m)	1936cd	1m	IPX-8, 2m
Medium	50	3h 30min				
High	130	1h				
SIZE	Length: 3.5" (90mm) Diameter: 0.75" (19mm)					
WEIGHT	1 oz. (28.5g) excluding batteries					

# E05

85 LUMENS



- ◆ Max 85 lumen output from one AAA battery
- ◆ Three brightness levels
- ◆ Twist switch. Broad beam lens

OPTIONAL ACCESSORIES


- None



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	8	15h	148ft (45m)	505cd	1m	IPX-8, 2m
Medium	25	4h 15min				
High	85	45min				
SIZE	Length: 2.6" (66.5mm) Diameter: 0.6" (15mm)					
WEIGHT	0.4 oz (12.5g) excluding batteries					

# E15

450 LUMENS



- ◆ Max 450 lumen output from one 16340 Li-ion battery
- ◆ Four brightness levels
- ◆ Intelligent drive circuit automatically determines output levels depending on the battery type used

OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- ARB-L16 Battery

ANSI/FSC		Low	Medium	High	Turbo
OUTPUT LUMENS	CR123A	8	50	110	270
	16340	8	50	110	450
RUNTIME	CR123A	72h	12h 30min	5h 5min	1h 35min
	16340	40h	9h 25min	3h 15min	55min
MAX DISTANCE	433ft (132m)				
MAX INTENSITY	4360cd				
IMPACT RESISTANCE	1m				
WATERPROOF	IPX-8, underwater 2m				
SIZE	Length: 2.6" (64.8mm) Diameter: 0.7" (19mm) Head: 0.9" (22mm)				
WEIGHT	1.0 oz (29g) excluding battery				



NEW

# E16

700 LUMENS



- OPTIONAL ACCESSORIES
- ALD-04 Helmet Clip
  - ARB-L16 Battery



- ◆ Max 700 lumen output from one 16340 Li-ion battery or 300 lumens from one CR123A battery
- ◆ Stainless-steel side switch operates four brightness levels plus strobe
- ◆ Magnetic tail and two-way body clip
- ◆ Neutral white light for better color rendering

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	3	70h	43ft (13m)	40cd	1m	IP68, waterproof underwater to 2m/dustproof
Medium	30	11h 55min	102ft (31m)	240cd		
High	150	2h	217ft (66m)	1100cd		
Turbo	700	1h 5min	466ft (142m)	5050cd		
SIZE	Length: 2.0" (51mm) Body: 0.7" (19mm) Head: 0.8" (21mm)					
WEIGHT	0.7 oz. (21g) excluding battery					

NEW

# E16Ti

650 LUMENS



- OPTIONAL ACCESSORIES
- ALD-04 Helmet Clip
  - ARB-L16 Battery



- ◆ Max 650 lumen output from one 16340 Li-ion battery
- ◆ Stainless-steel side switch operates four brightness levels plus strobe
- ◆ Magnetic tail and two-way body clip
- ◆ Electronic & physical lockout function

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	3	60h	23ft (7m)	12cd	1m	IP68, waterproof underwater to 2m/dustproof
Medium	30	11h	89ft (27m)	188cd		
High	150	2h 18min	203ft (62m)	984cd		
Turbo	650	1h 36min	430ft (131m)	4350cd		
SIZE	Length: 2.0" (51mm) Body: 0.7" (19mm) Head: 0.8" (21mm)					
WEIGHT	0.7 oz. (21g) excluding battery					

NEW

BEST SELLER

# E18R



750 LUMENS



**MAGNETIC TAIL**  
Put light where you need it

- ◆ Max 750 lumen output from one included 16340 Li-ion battery
- ◆ Five lighting modes including four brightness levels and strobe
- ◆ Stainless steel side switch with lock-out function and built-in battery level indicator
- ◆ Magnetic USB port and cable

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	5	70h	46ft (14m)	45cd	1m	IP68, waterproof underwater to 2m/dustproof
Medium	30	13h 50min	82ft (25m)	155cd		
High	150	2h 35min	190ft (58m)	850cd		
Turbo	750	45min	446ft (136m)	4660cd		
SIZE	Length: 2.4" (60mm) Diameter: 0.8" (20mm) Head: 0.8" (21mm)					
WEIGHT	1.17 oz. (33.3g) excluding battery					



- OPTIONAL ACCESSORIES
- ALD-04 Helmet Clip
  - ARB-L16 Battery



NEW

# E30R

1500 LUMENS



OPTIONAL ACCESSORIES

- AOFS+ Filter Adapter
- AOD-S Diffuser Tip
- ALD-04 Helmet Clip
- AOT-S Traffic Wand
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- AB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery



- ◆ Max 1500 lumen output from one 18650 Li-ion battery or two CR123A batteries
- ◆ Six modes including five brightness levels plus strobe
- ◆ Metal side switch for all functions
- ◆ Magnetic charging with battery level indicator

	MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF	SIZE	WEIGHT
ANSI/FSC	Eco	5	350h	33ft (10m)	–	1m	IP68, waterproof underwater to 2m/dustproof	Length: 3.9" (98mm) Body: 0.8" (21.5mm) Head: 1" (25.4mm)	1.8 oz. (51g) excluding battery
	Low	50	39h	115ft (35m)	–				
	Medium	150	12h 50min	197ft (60m)	–				
	High	350	4h 50min	289ft (88m)	–				
	Turbo	1500	1h 20min	591ft (180m)	–				



# E35UE

1000 LUMENS

OPTIONAL ACCESSORIES

- AOD-S Diffuser Tip
- ALD-04 Helmet Clip
- AOT-S Traffic Wand
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- AB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery



- ◆ Max 1000 lumen output from one 18650 Li-ion battery or two CR123A batteries
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Dual side switch for fast and easy operation
- ◆ Digitally regulated output maintains constant brightness

	MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF	SIZE	WEIGHT
ANSI/FSC	Eco	8	150h	525ft (160m)	6400cd	1m	IPX-8, 2m	Length: 4.8" (122mm) Diameter: 0.9" (24mm)	2.5 oz. (72g) excluding battery
	Low	50	42h 30min						
	Medium	150	11h 50min						
	High	450	4h						
	Turbo	1000	1h 50min						



# FD30

## 900 LUMENS



- ◆ Max 900 lumen output from one 18650 rechargeable Li-ion battery (not included) or two CR123A batteries
- ◆ Six modes including five brightness levels and strobe
- ◆ Dual reflector optical system with 360° rotary focusing
- ◆ Tactical tail switch and side mode switch

#### OPTIONAL ACCESSORIES

- AOFS+ Filter Adapter
- AOD-S Diffuser Tip
- ALD-04 Helmet Clip
- AOT-S Traffic Wand
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- AB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC	Eco	Low	Medium	High	Turbo	
<b>OUTPUT LUMENS</b>	8	50	150	350	900	
<b>RUNTIME</b>	170h	40h 30min	11h	4h 30min	2h	
<b>DISTANCE</b>	<b>SPOTLIGHT</b>	56ft (17m)	144ft (44m)	253ft (77m)	384ft (117m)	656ft (200m)
	<b>FLOODLIGHT</b>	26ft (8m)	52ft (16m)	92ft (28m)	141ft (43m)	220ft (67m)
<b>INTENSITY</b>	<b>SPOTLIGHT</b>	70cd	500cd	1500cd	3400cd	10000cd
	<b>FLOODLIGHT</b>	15cd	65cd	200cd	460cd	1100cd
<b>IMPACT RESISTANCE</b>	1m					
<b>WATER/DUST PROOF</b>	IP68, waterproof underwater 2m, dustproof					
<b>SIZE</b>	Length: 5.5" (140.5mm) Diameter: 0.9" (23mm) Head: 1.0" (25.4mm)					
<b>WEIGHT</b>	3.4 oz. (96g) excluding battery					

# FD41

## 900 LUMENS



- ◆ Max 900 lumen output from one 18650 rechargeable Li-ion battery (not included) or two CR123A batteries
- ◆ Five modes including four brightness levels and strobe
- ◆ Dual reflector optical system with 360° rotary focusing
- ◆ Double-layer body tube guards against corrosion

#### OPTIONAL ACCESSORIES

- AOFL Filter Adapter
- AOD-M Diffuser Tip
- ALD-04 Helmet Clip
- AOT-L Traffic Wand
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC	Low	Medium	High	Turbo	
<b>OUTPUT LUMENS</b>	10	150	350	900	
<b>RUNTIME</b>	150h	10h 15min	3h 50min	1h 40min	
<b>DISTANCE</b>	<b>SPOTLIGHT</b>	121ft (37m)	463ft (141m)	715ft (218m)	1115ft (340m)
	<b>FLOODLIGHT</b>	20ft (6m)	66ft (20m)	98ft (30m)	154ft (47m)
<b>INTENSITY</b>	<b>SPOTLIGHT</b>	350cd	5000cd	12000cd	29000cd
	<b>FLOODLIGHT</b>	9cd	100cd	230cd	560cd
<b>IMPACT RESISTANCE</b>	1m				
<b>WATER/DUST PROOF</b>	IP68, underwater 2m, dust proof				
<b>SIZE</b>	Length: 5.7" (146mm) Diameter: 1.0" (25.4mm) Head: 1.6" (40mm)				
<b>WEIGHT</b>	5.6 oz. (160g) excluding battery				

# LD02

100 LUMENS



- ◆ Max 100 lumen output from one AAA battery
- ◆ Three brightness levels
- ◆ Broad beam lens
- ◆ Tail tap switch



OPTIONAL ACCESSORIES  
• AB02 Belt Clip

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	8	15h	148ft (45m)	505cd	1m	IPX-8, 2m
Medium	25	4h 15min				
High	100	30min				
SIZE	Length: 3.0" (76mm) Diameter: 0.6" (15mm)					
WEIGHT	0.6 oz (16g) excluding batteries					

# LD02 v2.0

70 LUMENS

NEW



OPTIONAL ACCESSORIES  
• ALD-04 Helmet Clip  
• AB02 Belt Clip



- ◆ Max 70 lumen output from one AAA battery
- ◆ Four modes including three brightness levels plus a UV light
- ◆ Tail switch for one-handed activation and output selection
- ◆ Made of durable high-strength and oxidation-resistant aluminum and stainless steel

ANSI/FSC	UV Light	Low	Medium	High
OUTPUT LUMENS	200mW	1	25	70
RUNTIME	Alkaline	4h	75h	2h 40min
	Ni-MH	3h	45h	2h 55min
DISTANCE	-	20ft (6m)	89ft (27m)	157ft (48m)
INTENSITY	-	10cd	185cd	580cd
IMPACT RESISTANCE	1m			
WATERPROOF	IP68, waterproof underwater to 2m/dustproof			
SIZE	Length: 3.6" (92mm) Diameter: 0.5" (13.5mm)			
WEIGHT	0.8 oz. (24g) excluding battery			

NEW

# LD05 v2.0

100 LUMENS



- ◆ Max 100 lumen output from one AAA battery
- ◆ Four modes including three brightness levels plus a UV light
- ◆ Tail switch for one-handed activation and output selection
- ◆ Made of durable high-strength and oxidation-resistance aluminum and stainless steel



OPTIONAL ACCESSORIES  
• ALD-04 Helmet Clip

## NEW 365nm UV light

Clear anti-counterfeit watermarks are visible

UV LIGHT 200mW



ANSI/FSC	UV Light	Low	Medium	High
OUTPUT LUMENS	200mW	5	25	100
RUNTIME	Alkaline	9h	75h	7h 50min
	Ni-MH	7h	36h	6h 40min
DISTANCE	-	72ft (22m)	112ft (34m)	177ft (54m)
INTENSITY	-	120cd	290cd	730cd
IMPACT RESISTANCE	1m			
WATERPROOF	IP68, waterproof underwater to 2m/dustproof			
SIZE	Length: 5.3" (135mm) Diameter: 0.5" (13.5mm)			
WEIGHT	1.0 oz. (29.7g) excluding batteries			



# LD12

## 320 LUMENS



### OPTIONAL ACCESSORIES

- AOF5 Filter Adapter
- AOD-S Diffuser Tip
- ALD-04 Helmet Clip
- AOT-S Traffic Wand
- AB02 Belt Clip
- ARB-L14 Battery
- ARB-L14 USB Battery

- ◆ Max 320 lumen output from a 14500 rechargeable battery, 150 lumens from an alkaline AA battery (included)
- ◆ Five modes including four brightness levels and strobe
- ◆ On-barrel switching and clip option for easy handling



# LD22

## 300 LUMENS



### OPTIONAL ACCESSORIES

- AOF5 Filter Adapter
- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- ALB-10 Bike Mount

- ◆ Max 300 lumen output from two AA batteries
- ◆ Six modes including four brightness levels, strobe, and SOS
- ◆ A dedicated Tactical Mode activated by the rear-switch only for fast, simplified mode selection of turbo, low and strobe

### ANSI/FSC

MODE	OUTPUT LUMENS		RUNTIME		MAX DISTANCE	MAX INTENSITY	IMPACT	WATERPROOF
	AA	14500	Alkaline	14500				
Battery	AA	14500	Alkaline	14500	443ft (135m)	4500cd	1m	IP68, waterproof underwater to 2m, dustproof
Low	5	5	40h	50h				
Med	30	30	9h 40min	11h				
High	70	70	3h	3h 30min				
Turbo	150	210	50min	1h				
SIZE	Length: 6.1" (155mm) Diameter: 0.8" (21.5mm)							
WEIGHT	2.5 oz (72g) excluding battery							

### ANSI/FSC

MODE	OUTPUT LUMENS		RUNTIME		MAX DISTANCE	MAX INTENSITY	IMPACT	WATERPROOF
	Outdoor	Tactical	Alkaline	Ni-Mh				
Low	5	-	100h	90h	394ft (120m)	3600cd	1m	IPX-8, 2m
Med	30	30	25h 5min	22h 30min				
High	100	-	7h 10min	5h 5min				
Turbo	300	300	1h 25min	40min				
SIZE	Length: 6.1" (155mm) Diameter: 0.8" (21.5mm)							
WEIGHT	2.5 oz (72g) excluding battery							

### BEST SELLER

# LD15R

## 500 LUMENS




## MAGNETIC TAIL

Put light where you need it

### OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- AB02 Belt Clip
- ARB-L16 Battery


- ◆ Max 500 lumen output from one 16340 rechargeable Li-ion battery (included) or a CR123A lithium battery
- ◆ Seven modes including four brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator
- ◆ Two-way body clip and magnetic tail



ANSI/FSC	Low	Med	High	Turbo	Red Light
OUTPUT LUMENS	3	30	150	500	4
RUNTIME	110h	13h 20min	2h 50min	1h 20min	30h
DISTANCE	20ft (6m)	75ft (23m)	151ft (46m)	279ft (85m)	16ft (5m)
INTENSITY	9cd	135cd	530cd	1800cd	6cd
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater 2m, dustproof				
SIZE	Length: 2.8" (70mm) Diameter: 0.75" (19mm)				
WEIGHT	1.4 oz. (40g) weight excluding battery				

# LD41

## 960 LUMENS



OPTIONAL ACCESSORIES

- AOFL Filter Adapters
- AOT-L Traffic Wand

- ◆ Max 960 lumen output from four AA batteries
- ◆ Six modes including four brightness levels, strobe, and SOS
- ◆ Dependable dual tail cap switching system

# LD42

## 1000 LUMENS


NEW



- ◆ Max 1000 lumen output from four AA batteries
- ◆ Four brightness levels
- ◆ Patented rotary neck for mode selection

OPTIONAL ACCESSORIES

- AOFM Filter Adapters
- AOD-M Diffuser Tip
- AOT-M Traffic Wand




### ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	6	200h	984ft (300m)	22500cd	1m	IPX-8, 2m
Medium	150	9h 30min				
High	400	2h 25min				
Turbo	960	1h				
SIZE	Length: 6.9" (175mm) Diameter: 1.6" (40mm)					
WEIGHT	6.7 oz. (190g) weight excluding batteries					

### ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	1	120h	1106ft (337m)	–	1m	IP68, waterproof underwater to 2m, dustproof
Medium	100	18h 10min	630ft (192m)	–		
High	350	2h 38min	335ft (102m)	–		
Turbo	1000	1h 10min	105ft (32m)	–		
SIZE	Length: 6.3" (159.5mm) Diameter: 1.3" (32.5mm) Head: 1.3" (34mm)					
WEIGHT	3.3 oz. (93g) weight excluding batteries					

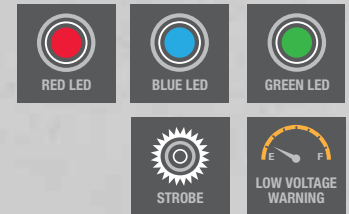

# LD75C

## 4000 LUMENS

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery

- ◆ Max 4000 lumen output from four 18650 or eight CR123A batteries
- ◆ Ten modes including five brightness levels, red, green, blue, white colors, and strobe
- ◆ Multi-color battery level indicator
- ◆ Double circuit design for flexible power options and better reliability

ANSI/FSC	Eco	Low	Med	High	Turbo	Red	Green	Blue	White
OUTPUT LUMENS	40	200	600	1800	4000	140	190	45	200
RUNTIME	175h	35h	11h	3h	1h 30min	14h	11h	11h	11h
MAX DISTANCE	1608ft (490m)								
MAX INTENSITY	60000cd								
IMPACT RESISTANCE	1m								
WATERPROOF	IPX-8, underwater 2m								
SIZE	Length: 6.3" (158mm) Width: 2" (52mm) Height: 2.9" (74mm)								
WEIGHT	15.2 oz. (430g) weight excluding batteries								



NEW

# LR40R

12000 LUMENS



- OPTIONAL ACCESSORIES
- ARB-L18 Battery
  - ARB-L18 USB Battery



- ◆ Max 12000 lumen output from four 18650 or eight CR123A batteries
- ◆ Ten modes including five brightness levels, red, green, blue, white colors, and strobe
- ◆ Multi-color battery level indicator
- ◆ Double circuit design for flexible power options and better reliability

ANSI/FSC	Spotlight Mode				Floodlight Mode				
	Eco	Low	Med	High	Low	Med	High	High2	Turbo
OUTPUT LUMENS	50	150	350	1000	350	1000	3000	6000	11000
RUNTIME	92h 18min	45h 39min	19h 39min	5h 4min	22h 44min	4h 41min	1h 53min	1h 27min	1h
DISTANCE	427ft (130m)	732ft (223m)	1096ft (334m)	1890ft (576m)	299ft (91m)	394ft (120m)	663ft (202m)	886ft (270m)	1083ft (330m)
INTENSITY	-	-	-	-	-	-	-	-	-
IMPACT RESISTANCE	1m								
WATERPROOF/DUSTPROOF	IP68, waterproof underwater 2m, dustproof								
SIZE	Length: 6.1" (154mm) Body: 2" (51mm) Head: 3.15" (80mm)								
WEIGHT	17.64 oz. (500g) excluding batteries								

**MAX 12000 LUMENS**  
Our most powerful flashlight!



**BEST SELLER**

# PD25

550 LUMENS



- ◆ Max 550 lumen output from a 16340 rechargeable battery or 400 lumens from a CR123A
- ◆ Five modes including four brightness levels and strobe
- ◆ Intelligent drive circuit for higher battery performance
- ◆ Optimum output-to-weight ratios

OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- ARB-L16 Battery

ANSI/FSC								
MODE	OUTPUT LUMENS		RUNTIME		MAX DISTANCE	MAX INTENSITY	IMPACT	WATERPROOF
Battery	CR123A	16340	CR123A	16340	427ft (130m)	4225cd	1m	IPX-8, 2m
Low	5	5	100h	53h				
Med	50	50	9h 5min	7h 10min				
High	150	150	3h 15min	2h 25min				
Turbo	400	550	1h 10min	45min				
SIZE	Length: 3.7" (93mm) Width: 0.8" (21.5mm)							
WEIGHT	1.7 oz. (47g) weight excluding battery							

# PD32

900 LUMENS



- ◆ Max 900 lumen output from one 18650 Li-ion battery or two CR123A batteries
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Tactical tail switch, momentary on function

OPTIONAL ACCESSORIES

- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	5	260h	787ft (240m)	14400cd	1m	IPX-8, 2m
Low	50	37h 5min				
Medium	150	10h 25min				
High	400	4h				
Turbo	900	1h 55min				
SIZE	Length: 5.1" (129.5mm) Diameter: 0.9" (22.6mm)					
WEIGHT	2.7 oz. (77g) excluding battery					

**NEW**

**BEST SELLER**

# PD35 v2.0

1000 LUMENS



- ◆ Max 1000 lumen output from one rechargeable 18650 Li-ion battery or two CR123A batteries (not included)
- ◆ Six modes including five brightness levels and strobe
- ◆ Boot-up battery level indicator and low-voltage warning
- ◆ Metal side switch for output selection

OPTIONAL ACCESSORIES

- AOFs+ Filter Adapter
- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC	Eco	Low	Medium	High	Turbo
OUTPUT LUMENS	3	50	150	350	1000
RUNTIME	430h	29h 30min	12h 25min	5h 10min	2h 50min*
DISTANCE	43ft (13m)	197ft (60m)	338ft (103m)	515ft (157m)	820ft (250m)
INTENSITY	42cd	900cd	2650cd	6250cd	15600cd
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater to 2m/dustproof				
SIZE	Length: 5.4" (138mm) Body: 0.9" (23mm) Head: 1.0" (25.4mm)				
WEIGHT	3.1 oz. (88g) weight excluding batteries				



**BEST SELLER**

# PD35TAC

1000 LUMENS



OPTIONAL ACCESSORIES

- AOF5+ Filter Adapter
- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALB02 Belt Clip
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery



STROBE



LOW VOLTAGE WARNING

- ◆ 1000 lumen output from two CR123A batteries or one 18650 Li-ion battery
- ◆ Six modes including five brightness levels and strobe
- ◆ A specific Tactical Mode activated by the rear-switch only for fast, simplified mode selection of turbo, low and strobe

ANSI/FSC	Eco	Low	Med	High	Turbo
<b>OUTPUT LUMENS</b>	8	60	200	500	1000
<b>RUNTIME</b>	140h	29h 15min	8h 30min	2h 55min	1h 10min
<b>MAX DISTANCE</b>	656ft (200m)				
<b>MAX INTENSITY</b>	10000cd				
<b>IMPACT RESISTANCE</b>	1m				
<b>WATERPROOF</b>	IPX-8, underwater 2m				
<b>SIZE</b>	Length: 5.5" (139mm) Diameter: 1" (25.4mm)				
<b>WEIGHT</b>	3.1 oz. (88g) weight excluding batteries				



# RC05SE

300 LUMENS



- ◆ Max 300 lumen output from one 14500 rechargeable Li-ion battery
- ◆ Four brightness levels
- ◆ Magnetic Micro-USB rechargeable
- ◆ Two position body clip and magnetic bottom

OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- AB02 Belt Clip
- ARB-L14 Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	5	40h	36ft (11m)	30cd	1m	IP68, waterproof underwater to 2m/dustproof
Medium	50	6h	121ft (37m)	340cd		
High	150	2h	207ft (63m)	990cd		
Turbo	300	1h 45min	295ft (90m)	2000cd		
SIZE	Length: 4.0" (102mm) Diameter: 0.7" (19mm)					
WEIGHT	1.3 oz. (36.8g) excluding battery and charging cable					

# RC20


1000 LUMENS



OPTIONAL ACCESSORIES

- AOF-L Filter Adapter
- AOD-M Diffuser Tip
- AOT-L Traffic Wand
- ALD-04 Helmet Clip
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount

- ◆ Max 1000 lumen output from built-in Li-ion battery
- ◆ Five modes including four brightness levels and strobe
- ◆ Included USB charging cradle and battery level indicator
- ◆ One-handed operation by dual tail switch



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	10	120h	951ft (290m)	21100cd	1m	IPX-8, underwater 2m
Medium	150	9h 50min				
High	425	2h 55min				
Turbo	1000	1h 10min				
SIZE	Length: 6.3" (161mm) Width: 1" (25.4mm) Head: 1.6" (40mm)					
WEIGHT	7.2 oz. (205g) including batteries					

# RC40

6000 LUMENS



OPTIONAL ACCESSORIES

- ARB-L3 Battery Pack

- ◆ Max 6000 lumen output from built-in rechargeable pack
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ AC adapter and DC car charger supportable
- ◆ Intelligent memory circuit and lock-out function



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	45	125h	2395ft (730m)	133200cd	1m	IPX-8, underwater 2m
Low	500	18h 15min				
Medium	2000	4h 15min				
High	4000	1h 50min				
Turbo	6000	1h				
SIZE	Length: 10.7" (272mm) Head: 4.6" (108mm) Diameter: 2.1" (52mm)					
WEIGHT	43.5 oz. (1234g) weight including battery					



# SD11

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion batteries or two CR123A Lithium batteries
- ◆ Three modes including two brightness levels and a red light
- ◆ Rotating magnetic ring for one-hand control
- ◆ Double-layer body tube guards against corrosion

OPTIONAL ACCESSORIES

- ALG-00 Rail Mount
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC	Low	High	Red
OUTPUT LUMENS	500	1000	250
RUNTIME	3h 40min	2h	3h
DISTANCE	98ft (30m)	148ft (45m)	75ft (23m)
INTENSITY	225cd	505cd	132cd
IMPACT RESISTANCE	1m		
WATERPROOF	IPX-8, underwater 100m		
SIZE	Length: 5.4" (138mm) Diameter: 1.0" (26mm) Head: 1.3" (34mm)		
WEIGHT	4.7 oz. (132.5g) excluding batteries		

# SD20

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion batteries or two CR123A Lithium batteries
- ◆ Three modes including two brightness levels and a red light
- ◆ Rotating magnetic ring for one-hand control
- ◆ Double-layer body tube guards against corrosion

OPTIONAL ACCESSORIES

- AOFL Filter Adapter
- AOD-M Diffuser Tip
- AOT-L Traffic Wand
- ALG-00 Rail Mount
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	400	7h 30min	354ft (108m)	2900cd	1m	IPX-8, 100m
Medium	1000	3h	564ft (172m)	7400cd		
Red	105	8h	240ft (73m)	1300cd		
SIZE	Length: 8.2" (208mm) Diameter: 1.0" (26mm) Head: 1.6" (40mm)					
WEIGHT	8.6 oz. (245g) excluding batteries					

NEW

# TK09TAC


1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Five modes including three brightness levels and two lighting levels in tactical mode
- ◆ Patented two-section tactical switch

OPTIONAL ACCESSORIES

- AOFM Filter Adapter
- AOD-M Diffuser Tip
- AOT-M Traffic Wand
- ALD-04 Helmet Clip
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ARB-L18 Battery
- ARB-L18 USB Battery



ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	30	50h	197ft (60m)	–	1m	IP68, waterproof underwater to 2m/dustproof
Medium	350	6h	512ft (156m)	–		
High	1000	2h	892ft (272m)	–		
SIZE	Length: 5.4" (136mm) Head: 1.3" (34mm) Body: 1.0" (25.4mm)					
WEIGHT	3.8 oz. (108g) excluding batteries					



# TK15UE

1000 LUMENS

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Five modes including four brightness levels and strobe
- ◆ Tactical tail switch for momentary-on function

OPTIONAL ACCESSORIES

- AOFM Filter Adapter
- AOD-M Diffuser Tip
- AOT-M Traffic Wand
- ALD-04 Helmet Clip
- AER-01 Remote Switch
- AER-02 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery



ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	10	135h	102ft (31m)	240cd	1m	IPX-8, 2m
Medium	150	11h 30min	410ft (125m)	3900cd		
High	350	4h 20min	636ft (194m)	9400cd		
Turbo	1000	2h	1066ft (325m)	26400cd		
SIZE	Length: 5.6" (142.5mm) Body: 1.0" (25.4mm) Head: 1.3" (34mm)					
WEIGHT	5.0 oz. (141g) excluding batteries					



**BEST SELLER**

# TK16

1000 LUMENS



- ◆ 1000 lumen output from one 18650 Li-ion battery or two CR123A Lithium batteries (batteries not included)
- ◆ Five modes including four brightness levels and strobe
- ◆ Dual tactical tail switch
- ◆ High intensity and long-range distance



- OPTIONAL ACCESSORIES
- AOFM Filter Adapter
  - AOD-M Diffuser Tip
  - AOT-M Traffic Wand
  - ALD-04 Helmet Clip
  - AER-03 Remote Switch
  - ALG-00 Rail Mount
  - ALG-01 Rail Mount
  - ALB-10 Bike Mount
  - ALC-01 Belt Clip
  - ARB-L18 Battery
  - ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	10	150h	787ft (240m)	14480cd	1m	IPX-8, 2m
Medium	150	10h				
High	400	3h 25min				
Turbo	1000	1h 10min				
<b>SIZE</b>	Length: 5.5" (140mm) Body: 0.98" (25mm) Head: 1.3" (34mm)					
<b>WEIGHT</b>	4.3 oz. (122g) excluding batteries					

**BEST SELLER**

# TK20R

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery
- ◆ Five modes including four brightness levels and strobe
- ◆ Reliable dual-layer body design
- ◆ Tactical tail switch and side mode switch

- OPTIONAL ACCESSORIES
- AOFM Filter Adapter
  - AOD-M Diffuser Tip
  - AOT-M Traffic Wand
  - ALD-04 Helmet Clip
  - AER-03 Remote Switch
  - ALG-00 Rail Mount
  - ALG-01 Rail Mount
  - ALB-10 Bike Mount
  - ALC-01 Belt Clip
  - ARB-L18 Battery
  - ARB-L18 USB Battery



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	10	135h	1017ft (310m)	24000cd	1m	IP68, waterproof underwater to 2m, dustproof
Medium	150	10h 30min	633ft (193m)	9310cd		
High	350	4h	413ft (126m)	3970cd		
Turbo	1000	1h 40min	102ft (31m)	240cd		
<b>SIZE</b>	Length: 6.0" (151.5mm) Body: 1.0" (25mm) Head: 1.3" (34mm)					
<b>WEIGHT</b>	5.0 oz (141g) excluding batteries					

# TK25 UV

## 1000 LUMENS



OPTIONAL ACCESSORIES

- AOFL Filter Adapter
- AOD-M Diffuser Tip
- AOT-L Traffic Wand
- ALD-04 Helmet Clip
- AER-03 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ARB-L18 Battery
- ARB-L18 USB Battery



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Six modes including four brightness levels, strobe, and a UV light
- ◆ Patent pending light source switching structure
- ◆ Dual tail switch controls the tactical activation and output selection

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	15	110h	82ft (25m)	160cd	1m	IP68, waterproof underwater to 2m/dustproof
Medium	100	22h 20min	247ft (75m)	1400cd		
High	300	5h 20min	407ft (124m)	3840cd		
Turbo	1000	2h	738ft (225m)	12650cd		
UV	3000mW	6h 25min	-	-		
SIZE	Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.57" (40mm)					
WEIGHT	5.5 oz. (156.5g) excluding battery					

# TK25 R&B

## 1000 LUMENS



OPTIONAL ACCESSORIES

- AOFL Filter Adapter
- AOD-M Diffuser Tip
- AOT-L Traffic Wand
- ALD-04 Helmet Clip
- AER-03 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ARB-L18 Battery
- ARB-L18 USB Battery

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Eight modes including four brightness levels, two red modes, one blue mode, and strobe
- ◆ Patent pending light source switching structure
- ◆ Dual tail switch controls the tactical activation and output selection



ANSI/FSC	Low	Med	High	Turbo	Red (High)	Red (Low)	Blue
OUTPUT	15	100	300	1000	150	25	60
RUNTIME	110h	22h 20min	5h 20min	2h	7h 30min	40h	6h 40min
DISTANCE	82ft (25m)	247ft (75m)	406ft (124m)	738ft (225m)	433ft (132m)	161ft (49m)	135ft (41m)
INTENSITY	160cd	1400cd	3840cd	12650cd	4350cd	600cd	420cd
IMPACT	1m						
WATERPROOF	IP68, underwater 2m						
SIZE	Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.5" (40mm)						
WEIGHT	5.5 oz. (156.5g) excluding battery and belt clip						

# TK25 RED

## 1000 LUMENS



OPTIONAL ACCESSORIES

- AOFL Filter Adapter
- AOD-M Diffuser Tip
- AOT-L Traffic Wand
- ALD-04 Helmet Clip
- AER-03 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ARB-L18 Battery
- ARB-L18 USB Battery

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Eight modes including four brightness levels, three red modes, and strobe
- ◆ Patent pending light source switching structure
- ◆ Dual tail switch controls the tactical activation and output selection



ANSI/FSC	Low	Med	High	Turbo	Red (Low)	Red (Med)	Red (High)
OUTPUT	15	100	300	1000	10	100	310
RUNTIME	110h	22h 20min	5h 20min	2h	100h	9h 20min	2h 35min
DISTANCE	82ft (25m)	247ft (75m)	406ft (124m)	738ft (225m)	105ft (32m)	344ft (105m)	656ft (200m)
INTENSITY	160cd	1400cd	3840cd	12650cd	250cd	2790cd	10000cd
IMPACT	1m						
WATERPROOF	IP68, underwater 2m						
SIZE	Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.5" (40mm)						
WEIGHT	5.5 oz. (156.5g) excluding battery and belt clip						



# TK32

960 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Eight modes including four brightness levels, two red modes, and two green modes
- ◆ Dual tail switch controls the tactical activation and output selection
- ◆ Compatible with AER-03 remote pressure switch

OPTIONAL ACCESSORIES

- ALD-04 Helmet Clip
- AER-03 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC	Low	Med	High	Turbo	Red (High)	Red (Low)	Green (High)	Green (Low)
OUTPUT LUMENS	8	100	350	1000	105	15	165	30
RUNTIME	170h	15h 25min	4h 45min	1h 50min*	4h 15min	65h	5h 30min	40h
DISTANCE	131ft (40m)	453ft (138m)	804ft (245m)	1385ft (422m)	213ft (65m)	75ft (23m)	344ft (105m)	148ft (45m)
INTENSITY	400cd	4760cd	15000cd	44500cd	1050cd	135cd	2760cd	505cd
IMPACT RESISTANCE	1m							
WATERPROOF	IPX-8, underwater 2m							
SIZE	Length: 6.3" (159mm) Body: 1" (25.4mm) Head: 2" (52mm)							
WEIGHT	6.2 oz. (175g) excluding batteries							

# TK35

1300 LUMENS



- ◆ Max 1300 lumen output from four CR123A or two 18650 batteries
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Micro USB rechargeable battery holder with battery level indicator

OPTIONAL ACCESSORIES

- AOT-01 Traffic Wand
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	10	235h	1575ft (480m)	57600cd	1m	IP68, waterproof underwater to 2m, dustproof
Low	50	68h 15min	965ft (294m)	21600cd		
Medium	150	21h 30min	528ft (161m)	6480cd		
High	500	5h 45min	318ft (97m)	2360cd		
Turbo	1300	3h 10min	128ft (39m)	380cd		
SIZE	Length: 6.3" (159.5mm) Body: 1.7" (43mm) Head: 1.9" (48mm)					
WEIGHT	9.6 oz. (271g) weight excluding batteries					

# TK35UE

3200 LUMENS

BEST SELLER



- ◆ Max 3200 lumen output from two 18650 rechargeable Li-ion batteries (not included)
- ◆ Eight modes including six brightness levels, strobe, and SOS
- ◆ Dual tail switches with patented rotary mode switch
- ◆ Micro USB rechargeable battery holder with battery level indicator

OPTIONAL ACCESSORIES

- AOT-01 Traffic Wand
- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	20	152h	66ft (20m)	22500cd	1m	IP68, waterproof underwater to 2m, dustproof
Low	100	38h 40min	180ft (55m)	13600cd		
Medium	350	10h 50min	328ft (100m)	7140cd		
High	1000	3h 40min	554ft (169m)	2500cd		
Turbo I	2000	2h	764ft (233m)	760cd		
Turbo II	3200	1h 30min	984ft (300m)	100cd		
SIZE	Length: 6.5" (164.5mm) Body: 1.7" (43mm) Head: 1.9" (48mm)					
WEIGHT	10.1 oz. (286g) weight excluding batteries					

# TK47

## 1300 LUMENS



- ◆ Max 1300 lumen output from two 18650 Li-ion batteries
- ◆ Nine modes including four brightness levels and strobe
- ◆ Focus beam throws 2297ft (700m)
- ◆ Tail Light operation includes constant white and red light, red flash and red SOS
- ◆ Dual independent control light switches

OPTIONAL ACCESSORIES  
• ARB-L18 Battery

ANSI/FSC	Head Light				Tail Light		
	Low	Med	High	Turbo	White	Red	Flash/SOS
<b>OUTPUT LUMENS</b>	10	100	400	1300	30	1.5	1.5
<b>RUNTIME</b>	220h	40h	7h 15min	1h 50min*	43h 30min	150h	-
<b>DISTANCE</b>	240ft (73m)	702ft (214m)	1352ft (412m)	2297ft (700m)	26ft (8m)	-	-
<b>INTENSITY</b>	1300cd	11500cd	42400cd	122500cd	-	-	-
<b>IMPACT RESISTANCE</b>	1m						
<b>WATERPROOF/DUSTPROOF</b>	IP68, underwater 2m / dustproof						
<b>SIZE</b>	Length: 10.48" (266.2mm) Head: 2.42" (61.5mm) Diameter: 1.13" (28.6mm)						
<b>WEIGHT</b>	13.26 oz. (376g) excluding batteries						

# TK47UE

## 3200 LUMENS



- ◆ Max 3200 lumen output from two 18650 Li-ion batteries
- ◆ Ten modes including five brightness levels and strobe
- ◆ Optics have a unique broad beam capability
- ◆ Tail Light operation includes constant white and red light, red flash and red SOS
- ◆ Dual independent control light switches

OPTIONAL ACCESSORIES  
• ARB-L18 Battery

ANSI/FSC	Head Light					Tail Light		
	Low	Eco	Med	High	Turbo	White	Red	Flash/SOS
<b>OUTPUT LUMENS</b>	20	100	350	1000	3200	30	1.5	1.5
<b>RUNTIME</b>	170h	46h	11h 20min	3h 20min	1h	43h 30min	150h	-
<b>DISTANCE</b>	102ft (31m)	226ft (69m)	427ft (130m)	761ft (232m)	1339ft (408m)	26ft (8m)	-	-
<b>INTENSITY</b>	240cd	1300cd	11500cd	42400cd	122500cd	-	-	-
<b>IMPACT RESISTANCE</b>	1m							
<b>WATERPROOF/DUSTPROOF</b>	IP68, waterproof underwater to 2m, dustproof							
<b>SIZE</b>	Length: 10.48" (266.2mm) Head: 2.42" (61.5mm) Diameter: 1.13" (28.6mm)							
<b>WEIGHT</b>	12.87 oz. (365g) excluding batteries							



# TK65R

## 3200 LUMENS



OPTIONAL ACCESSORIES

- None

- ◆ Max 3200 lumen output from two 26650 9600mAh rechargeable battery pack
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Dual switch operation with momentary-on strobe
- ◆ Waterproof micro-USB fast charging port included

### ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	30	113h	121ft (37m)	340cd	1m	IP68, waterproof underwater to 2m, dustproof
Low	150	35h 45min	272ft (83m)	1720cd		
Medium	400	13h 10min	453ft (138m)	4760cd		
High	1500	4h 55min	715ft (218m)	11880cd		
Turbo	3200	1h 45min	1230ft (375m)	35155cd		
SIZE	Length: 10.6" (270.5mm) Width: 2.4" (61.5mm) Height: 1.4" (36.5mm)					
WEIGHT	14.7 oz. (418g) excluding battery and belt clip					

# TK72R

## 9000 LUMENS



OPTIONAL ACCESSORIES


- None

- ◆ Max 9000 lumen output from included 7.2V/7000mAh Li-ion battery pack
- ◆ Three modes including any brightness level between 100-9000 lumens and strobe
- ◆ OLED display shows brightness level, available runtime and remaining battery life

ANSI/FSC	Lowest	Highest	Strobe
OUTPUT LUMENS	100	9000	4000
RUNTIME	50h	50min	-
DISTANCE	102ft (31m)	938ft (286m)	-
INTENSITY	240cd	20500cd	-
IMPACT RESISTANCE	1m		
WATERPROOF	IP68, waterproof underwater to 2m/dust proof		
SIZE	Length: 6.1" (156mm) Head: 2.3" (59mm) Body: 2.0" (50mm)		
WEIGHT	14.5 oz. (412g) weight excluding batteries		

# TK75

5100 LUMENS



- ◆ Max 5100 lumen output from four 18650 rechargeable Li-ion batteries (not included)
- ◆ Eight modes including six brightness levels, strobe, and SOS
- ◆ Dual stainless steel mode switches
- ◆ Battery level indicator, quick lock-out function

- OPTIONAL ACCESSORIES
- ARB-L18 Battery
  - ARB-L18 USB Battery

ANSI/FSC	Eco	Low	Medium	High I	High II	Turbo
<b>OUTPUT LUMENS</b>	50	150	450	1000	2000	5100
<b>RUNTIME</b>	95h	46h	17h 45min	6h	3h	2h 15min
<b>DISTANCE</b>	279ft (85m)	482ft (147m)	843ft (257m)	1204ft (367m)	1696ft (517m)	2789ft (850m)
<b>INTENSITY</b>	1800cd	5400cd	16500cd	33600cd	66800cd	180600cd
<b>IMPACT RESISTANCE</b>	1m					
<b>WATERPROOF</b>	IP68, waterproof underwater to 2m, dustproof					
<b>SIZE</b>	Length: 7.4" (188mm) Body: 2.1" (53mm) Head: 3.4" (86mm)					
<b>WEIGHT</b>	22.2 oz. (630g) excluding batteries					






**BEST SELLER**

# UC30

1000 LUMENS



**OPTIONAL ACCESSORIES**

- AOFs+ Filter Adapter
- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

- ◆ Max 1000 lumen output from 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Six modes including five brightness levels and strobe
- ◆ Micro-USB rechargeable
- ◆ Stainless steel side switch with battery level indicator


ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	5	150h	69ft (21m)	110cd	1m	IP68, waterproof underwater to 2m/dustproof
Low	50	28h 25min	190ft (58m)	840cd		
Medium	150	8h 45min	331ft (101m)	2550cd		
High	350	3h 20min	512ft (156m)	6080cd		
Turbo	1000	1h 25min	830ft (253m)	16000cd		
SIZE	Length: 5.1" (130mm) Width: 1" (25.4mm)					
WEIGHT	2.7 oz. (77g) excluding battery					

**NEW**

**BEST SELLER**

# UC35 v2.0

1000 LUMENS



**OPTIONAL ACCESSORIES**

- AOFs+ Filter Adapter
- AOD-S Diffuser Tip
- AOT-S Traffic Wand
- ALD-04 Helmet Clip
- AER-03 Remote Switch
- ALG-00 Rail Mount
- ALG-01 Rail Mount
- ALB-10 Bike Mount
- ALP-MT Holster
- ARB-L18 Battery
- ARB-L18 USB Battery

- ◆ Max 1000 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- ◆ Six modes including five brightness levels and strobe
- ◆ Cree XP-L HI V3 LED provides greater brightness, efficiency and throw
- ◆ Micro-USB rechargeable with battery level indicator

ANSI/FSC	Moonlight	Low	Medium	High	Turbo
OUTPUT LUMENS	1	50	150	350	1000
RUNTIME	800h	28h 10min	10h 40min	4h 10min	2h 15min
DISTANCE	33ft (10m)	210ft (64m)	322ft (98m)	525ft (160m)	873ft (266m)
INTENSITY	25cd	1000cd	2400cd	6400cd	17700cd
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater to 2m/dustproof				
SIZE	Length: 5.5" (140mm) Body: 0.9" (23.5mm) Head: 1.0" (25.4mm)				
WEIGHT	3.1 oz. (89g) weight excluding batteries				

# UC52

3000 LUMENS



- ◆ Max 3100 lumen output from the built-in 7.2V/3500mAh Li-ion battery pack
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ OLED screen digitally displays current output level and remaining runtime
- ◆ Micro-USB rechargeable

OPTIONAL ACCESSORIES  
 • None


ANSI/FSC	Eco	Low	Medium	High	Turbo
<b>OUTPUT LUMENS</b>	15	100	350	1000	3100
<b>RUNTIME</b>	82h 30min	27h 30min	8h 15min	2h 45min	42min
<b>DISTANCE</b>	59ft (18m)	144ft (44m)	279ft (85m)	476ft (145m)	830ft (253m)
<b>INTENSITY</b>	80cd	490cd	1800cd	5200cd	16000cd
<b>IMPACT RESISTANCE</b>	1m				
<b>WATERPROOF</b>	IP68, waterproof underwater to 2m / dustproof				
<b>SIZE</b>	Length: 6.0" (153.5mm) Head: 1.7" (42mm) Body: 1.0" (26mm)				
<b>WEIGHT</b>	9.7 oz. (276g) including battery				





# HL12R

## 400 LUMENS

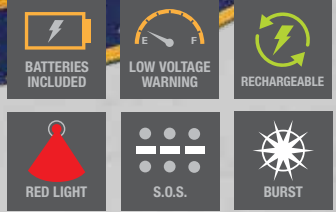

OPTIONAL ACCESSORIES  
• None

ANSI/FSC	Eco	Low	Medium	High	Burst	Red Light
OUTPUT LUMENS	4	30	70	130	400	1
RUNTIME	110h	33h	13h	8h	1h*	66h
DISTANCE	23ft (7m)	56ft (17m)	85ft (26m)	118ft (36m)	210ft (64m)	10ft (3m)
INTENSITY	12cd	72cd	169cd	324cd	1024cd	2cd
IMPACT RESISTANCE	1m					
WATERPROOF	IP66, rain/splash proof / dust proof					
SIZE	Length: 2.2" (56mm) Width: 1.6" (40mm) Height: 1.3" (31.9mm)					
WEIGHT	2.6 oz. (73.3g) including headband/battery					


- ◆ Max 400 lumen output from built-in 1000mAh Li-polymer battery
- ◆ Eight modes including five brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator



OPTIONAL ACCESSORIES  
• None

# HL15

## 200 LUMENS




- ◆ Max 200 lumen output from the included two AAA batteries
- ◆ Six modes including four brightness levels and two red light modes
- ◆ Neutral white light for better color rendering
- ◆ Red light for flashing alert or better night vision

ANSI/FSC	White Light				Red Light		
	Low	Med	High	Turbo	Eco	Flash	
OUTPUT LUMENS	4	30	70	200	0.2	0.2	
RUNTIME	Ni-MH	37h	8h 30min	3h 30min	1h 10min	75h	150h
	Alkaline	58h	12h 30min	4h	1h 30min	85h	170h
DISTANCE	26ft (8m)	59ft (18m)	95ft (29m)	164ft (50m)	-	-	
INTENSITY	18cd	82cd	208cd	500cd	-	-	
IMPACT RESISTANCE	1m						
WATERPROOF	IP67, dustproof, water resistant						
SIZE	Length: 2.5" (63mm) Width: 1.6" (41.5mm) Height: 1.4" (35mm)						
WEIGHT	2.1 oz. (60g) excluding battery						

NEW

# HL18R

## 400 LUMENS



OPTIONAL ACCESSORIES

- None


- ◆ Max 400 lumen output from a Li-ion battery pack or three AAA batteries
- ◆ Seven modes including four brightness levels in spotlight mode, two levels in floodlight mode, and SOS
- ◆ Two separate switches control the spotlight and floodlight modes
- ◆ Reflective headband includes a silicone sweat guard

ANSI/FSC	Spotlight Mode				Floodlight Mode			
	Low	Med	High	Turbo	Low	High	S.O.S.	
OUTPUT LUMENS	30	70	130	400	4	30	30	
RUNTIME	Lithium	48h	17h 30min	12h 30min	3h 30min	145h	42h	72h
	AAA	48h 30min	22h	14h	5h 30min	150h	48h 30min	80h
DISTANCE	66ft (20m)	98ft (30m)	131ft (40m)	249ft (76m)	16ft (5m)	33ft (10m)	20ft (6m)	
INTENSITY								
IMPACT RESISTANCE	1m							
WATERPROOF	IP66, dustproof/water resistant							
SIZE	Length: 2.27" (57.7mm) Width: 1.67" (42.3mm) Height: 1.46" (37mm)							
WEIGHT	2.8 oz. (79.5g) including battery, headband & holder							

BEST SELLER

# HL26R

## 450 LUMENS



OPTIONAL ACCESSORIES

- None


- ◆ Max 450 lumen output from a built-in 1600mAh Li-polymer battery
- ◆ Seven modes including four brightness levels in spotlight mode, two levels in floodlight mode, and SOS
- ◆ Two separate switches control the spotlight and floodlight modes
- ◆ Reflective headband includes a silicone sweat guard to keep sweat out of your eyes

ANSI/FSC	Spotlight Mode				Floodlight Mode		
	Low	Med	High	Burst	Low	High	S.O.S.
OUTPUT LUMENS	30	70	130	450	4	40	40
RUNTIME	25h	12h	6h	1h 30min*	100h	13h	26h
DISTANCE	98ft (30m)	138ft (42m)	187ft (57m)	328ft (100m)	13ft (4m)	33ft (10m)	-
INTENSITY	225cd	450cd	810cd	2564cd	4cd	24cd	-
IMPACT RESISTANCE	1m						
WATERPROOF/DUSTPROOF	IP66, dustproof/water resistant						
SIZE	Length: 2.56" (65mm) Width: 1.73" (44mm) Height: 1.46" (37mm)						
WEIGHT	3.03 oz. (86g) including battery						



# HL30

## 300 LUMENS



OPTIONAL ACCESSORIES

- ARB-L14 Battery

- ◆ Max 300 lumen output from two AA batteries (included)
- ◆ Eight modes including five brightness levels, SOS, red reading light, and red flashing
- ◆ Wide-range floodlight illumination

ANSI/FSC	Eco	Low	Med	High	Turbo	Red Light	Red Flash	SOS	
<b>OUTPUT LUMENS</b>	4	30	70	130	300	1	1	30	
<b>RUNTIME</b>	Alkaline	200h	71h	41h	9h	4.5h	170h	340h	142h
	Ni-MH	200h	65h	35h	12h	7h	170h	340h	130h
<b>DISTANCE</b>	20ft (6m)	52ft (16m)	75ft (23m)	115ft (35m)	164ft (50m)	13ft (4m)	13ft (4m)	52ft (16m)	
<b>INTENSITY</b>	10cd	64cd	137cd	306cd	610cd	4cd	4cd	64cd	
<b>IMPACT RESISTANCE</b>	1m								
<b>WATERPROOF</b>	IP67, waterproof underwater to 1m, dustproof								
<b>SIZE</b>	Length: 2.5" (64mm) Width: 2.0" (50mm) Height: 1.5" (38mm)								
<b>WEIGHT</b>	2.6 oz. (73.5g) excluding batteries								

# HL32R

## 600 LUMENS




- ◆ Max 600 lumen output from built-in 2000mAh Li-polymer battery
- ◆ Nine modes including six brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	4	200h	23ft (7m)	13cd	1m	IP66, rain/splash proof dustproof
Low	30	60h	52ft (16m)	65cd		
Medium	70	24h	75ft (23m)	137cd		
High	130	14h	112ft (34m)	290cd		
Turbo	300	4h 30min	161ft (49m)	593cd		
Burst	600	1h	240ft (73m)	1333cd		
Red	1	100h	13ft (4m)	4cd		
<b>SIZE</b>	Length: 2.5" (64mm) Width: 1.8" (46mm) Height: 1.5" (37.5mm)					
<b>WEIGHT</b>	3.8 oz. (108g) including headband/battery					

# HL40R

## 600 LUMENS

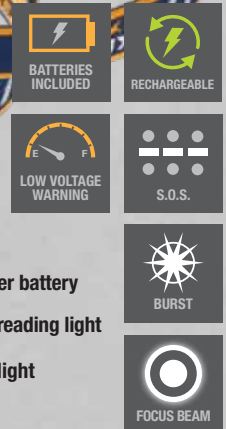

- ◆ Max 600 lumen output from built-in 2000mAh Li-polymer battery
- ◆ Seven modes including five brightness levels, SOS, and reading light
- ◆ Rotating ring focuses the beam from spotlight to floodlight
- ◆ Micro-USB rechargeable

ANSI/FSC	Reading	Eco	Low	Medium	High	Burst	
<b>OUTPUT LUMENS</b>	4	30	70	130	300	600	
<b>RUNTIME</b>	200h	50h	22h	11h	4h 30min	1h 20min	
<b>DISTANCE</b>	SPOT	33ft (10m)	98ft (30m)	151ft (46m)	210ft (64m)	315ft (96m)	482ft (147m)
	FLOOD	13ft (4m)	30ft (9m)	46ft (14m)	62ft (19m)	95ft (29m)	141ft (43m)
<b>INTENSITY</b>	SPOT	27cd	230cd	535cd	1021cd	2316cd	5426cd
	FLOOD	4cd	21cd	49cd	93cd	212cd	472cd
<b>IMPACT RESISTANCE</b>	1m						
<b>WATERPROOF</b>	IP66, rain/splash proof / dust proof						
<b>SIZE</b>	Length: 2.7" (68mm) Width: 2.1" (54mm) Height: 1.7" (42mm)						
<b>WEIGHT</b>	4.6 oz. (130g) including headband						

# HL55

900 LUMENS



- ◆ Max 900 lumen from one 18650 or two CR123A batteries
- ◆ Five modes including four brightness levels and burst
- ◆ All-metal housing and waterproof to 2 meters
- ◆ Optimum output-to-weight ratio



OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	MAX DISTANCE	MAX INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	10	150h	381ft (116m)	3380cd	1m	IPX-8, 2m
Low	55	30h				
Medium	165	10h				
High	420	3h 45min				
Burst	900	-				
SIZE	Length: 3.3" (84mm) Diameter: 1.8" (46mm) Head: 1.9" (48mm)					
WEIGHT	4.1 oz (115g) excluding batteries					



OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery

**BEST SELLER**

# HL60R

950 LUMENS

- ◆ 950 lumen output from one rechargeable 18650 Li-ion battery
- ◆ Five brightness levels plus red light alert mode
- ◆ Micro-USB rechargeable
- ◆ Neutral white light for better color rendering



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Red	1	100h	-	-	1m	IPX-8, 2m
Eco	5	100h	26ft (8m)	18cd		
Low	50	29h	89ft (27m)	179cd		
Medium	150	10h	151ft (46m)	536cd		
High	400	3h	249ft (76m)	1430cd		
Burst	950	-	381ft (116m)	3396cd		
SIZE	Length: 3.4" (87mm) Width: 1.8" (46mm) Height: 2.0" (51mm)					
WEIGHT	4.3 oz. (121g) excluding batteries					



NEW

# HM23

200 LUMENS



- ◆ Max 200 lumen output from one AA battery
- ◆ Four brightness levels
- ◆ All-metal housing with anti-slip holder

OPTIONAL ACCESSORIES  
• ARB-L14 Battery



ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	4	100h	–	–	1m	IP68, waterproof underwater to 2m/dustproof
Low	30	24h	82ft (25m)	–		
Medium	70	16h	125ft (38m)	–		
High	200	4h	180ft (55m)	–		
SIZE	Length: 2.7" (69.5mm) Width: 1.3" (32mm) Height: 1.6" (40mm)					
WEIGHT	2.1 oz. (58g) including headband/battery					

# HM50R

500 LUMENS

BEST SELLER



- ◆ Max 500 lumen output from one rechargeable 16340 Li-ion battery (included) or one CR123A battery
- ◆ White light LED with four brightness levels
- ◆ Micro-USB rechargeable
- ◆ Detachable silicone lamp holder

OPTIONAL ACCESSORIES  
• ARB-L16 Battery



ANSI/FSC	Low	Medium	High	Turbo	
OUTPUT LUMENS	4	30	130	500	
RUNTIME	CR123A	128h	48h	14h	2h
	16340	90h	24h	10h	2h 30min
DISTANCE	20ft (6m)	66ft (20m)	138ft (42m)	262ft (80m)	
INTENSITY	11cd	104cd	453cd	1813cd	
IMPACT RESISTANCE	1m				
WATERPROOF	IP68, waterproof underwater to 2m/dustproof				
SIZE	Length: 2.7" (67.5mm) Width: 1.3" (33mm) Height: 1.1" (28mm)				
WEIGHT	2.2 oz. (63g) excluding batteries				

NEW

# HM65R

1400 LUMENS



OPTIONAL ACCESSORIES  
• ARB-L18 Battery  
• ARB-L18U Battery



- ◆ Max 1400 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- ◆ Seven modes including four spotlight brightness levels and three floodlight levels
- ◆ Type-C USB rechargeable with battery level indicator
- ◆ Dual switches for separate control of spotlight and floodlight

ANSI/FSC	Spotlight Mode				Floodlight Mode		
	Low	Med	High	Turbo	Low	Med	High
OUTPUT LUMENS	50	130	400	1000	4	130	400
RUNTIME	90h	41h 30min	15h 30min	4h	300h	60h	20h
DISTANCE	82ft (25m)	174ft (53m)	305ft (93m)	479ft (146m)	16ft (5m)	75ft (23m)	161ft (49m)
INTENSITY	–	–	–	–	–	–	–
IMPACT RESISTANCE	1m						
WATERPROOF/DUSTPROOF	IP68, waterproof underwater to 2m/dustproof						
SIZE	Length: 3.1" (79mm) Width: 2.1" (52mm) Height: 1.5" (39mm)						
WEIGHT	3.5 oz. (100g) excluding battery						

# HP15UE

900 LUMENS



ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Eco	10	170h	584ft (178m)	7941cd	1m	IPX-6
Low	50	44h				
Medium	150	8h				
High	400	3h 10min				
Burst	900	-				
SIZE	Light Size: Length: 2.7" (69mm) Width: 2.2" (56mm) Height: 1.4" (36mm) Battery Case: Length: 3.5" (89mm) Width: 2.9" (74mm) Height: 1.1" (28mm)					
WEIGHT	6.8 oz (154.2g) excluding batteries					

- ◆ Max 900 lumen output in BURST mode from four AA batteries
- ◆ Six modes including four brightness levels, burst, and SOS
- ◆ Rugged aluminum housing
- ◆ Excellent light to battery base balance

OPTIONAL ACCESSORIES  
• ARB-L14 USB Battery




# HP25R

1000 LUMENS

ANSI/FSC							
	MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
FLOODLIGHT	Eco	4	150h	20ft (6m)	11cd	1m	IPX-6
	Low	30	40h	43ft (13m)	46cd		
	Med	130	9h	82ft (25m)	158cd		
	High	350	2h 30min	144ft (44m)	484cd		
SPOTLIGHT	Low	30	42h	112ft (34m)	296cd		
	Med	130	12h	217ft (66m)	1108cd		
	High	350	4h 30min	358ft (109m)	3001cd		
	Turbo	1000	1h 30min	614ft (187m)	8772cd		
	Red	0.2	96h	-	-		
SIZE	Light Size: Length: 2.4" (60mm) Width: 2.1" (54mm) Height: 1.3" (32.5mm) Battery Case: Length: 3.2" (82.5mm) Width: 2.0" (50mm) Height: 1.4" (35mm)						
WEIGHT	6.5 oz. (183.5g) weight excluding battery						

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery (included) or two CR123A batteries
- ◆ Nine modes including four brightness levels for both floodlight and spotlight and a red light
- ◆ Neutral white floodlight and long range spotlight
- ◆ Micro-USB rechargeable battery case

OPTIONAL ACCESSORIES  
• ARB-L18 Battery  
• ARB-L18 USB Battery







**BEST SELLER**

# HP30R

**1750 LUMENS**

- ◆ Max 1750 lumen output from two 18650 Li-ion rechargeable batteries or four CR123A batteries
- ◆ Nine modes including four spotlight brightness levels and three floodlight levels plus SOS
- ◆ Switch between spotlight and floodlight or use them both simultaneously
- ◆ Battery pack can be used as a power bank



- OPTIONAL ACCESSORIES
- ARB-L18 Battery
  - ARB-L18 USB Battery

		ANSI/FSC						
	MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF	
FLOOD	Low	5	400h	23ft (7m)	12.5cd	1m	IP66	
	Med	130	23h	89ft (27m)	180cd			
	High	400	6h	151ft (46m)	519cd			
	Turbo	750	4h	200ft (61m)	916cd			
SPOTLIGHT	Low	30	83h	112ft (34m)	288cd	1m	IP66	
	Med	130	21h	236ft (72m)	1284cd			
	High	400	6h 30min	407ft (124m)	3820cd			
	Turbo	1000	4h	663ft (202m)	10268cd			
SIZE	Light Size: Length: 3.0" (77mm) Width: 2.0" (52mm) Height: 1.4" (34mm) Battery Case: Length: 4.5" (115mm) Width: 2.2" (56mm) Height: 1.2" (30mm)							
WEIGHT	10.0 oz. (285g) weight excluding batteries							


**BEST SELLER**

# CL09

200 LUMENS



OPTIONAL ACCESSORIES  
• ARB-L16 Battery



- ◆ Max 200 lumen output from one ARB-L16-700U rechargeable Li-ion battery or one CR123A battery
- ◆ Twist tail to choose from seven different modes
- ◆ Tri-color lighting source: white, red and green

ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	1	90h	33ft (10m)	-	1m	IP68, waterproof underwater to 2m/dustproof
Medium	30	19h 20min				
High	80	5h 40min				
Turbo	200	2h 40min				
Red	5	30h				
Green	5	48h				
<b>SIZE</b>	Length: 3.09" (78.5mm) Diameter: 0.86" (22mm)					
<b>WEIGHT</b>	1.11 oz (31.5g) excluding battery and other accessories					

# CL20R

300 LUMENS



- ◆ Max 300 lumen output from the built-in 1600mAh Li-polymer battery
- ◆ Six lighting modes including four white light levels, red light, and red flashing
- ◆ Micro-USB rechargeable

OPTIONAL ACCESSORIES  
• None

ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	1	200h	49ft (15m)	-	1m	IP68, waterproof underwater to 2m/dustproof
Medium	40	20h				
High	130	12h				
Turbo	300	6h				
Red	1.5	100h				
<b>SIZE</b>	Length: 2.8" (72mm) Width: 1.6" (41.5mm) Height: 2.0" (50mm)					
<b>WEIGHT</b>	3.2 oz. (91g) including battery					

**NEW**

# CL23

300 LUMENS



- ◆ Max 300 lumen output from up to three AA batteries
- ◆ Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- ◆ One switch control for easy and fast operation
- ◆ IP66 rated rain resistant and dustproof

OPTIONAL ACCESSORIES  
• None

ANSI/FSC

MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	40	45h	66ft (20m)	-	1m	IP66, rain resistant/dustproof
Medium	150	13h				
High	300	7h 30min				
Front	25	80h				
Down 1	2	350h				
Down 2	25	80h				
Red	1	150h				
<b>SIZE</b>	Diameter: 2.2" (55mm) Height: 3.4" (85mm)					
<b>WEIGHT</b>	4.9 oz. (140g) excluding batteries					






NEW

# CL26R

## 400 LUMENS



- ◆ Max 400 lumen output from one 18650 Li-ion battery or two CR123As
- ◆ Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- ◆ Extremely durable case can withstand 1.2 tons of pressure
- ◆ IP66 rated rain resistant and dustproof

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	40	30h	82ft (25m)	-	1m	IP66, rain resistant/dustproof
Medium	150	15h				
High	400	5h				
Front	25	58h				
Down 1	3	240h				
Down 2	25	58h				
Red	1	200h				
SIZE	Diameter: 1.9" (49mm) Height: 3.8" (97mm)					
WEIGHT	4.1 oz. (116g) excluding batteries					



# CL30R

## 650 LUMENS

- ◆ Max 650 lumen output from up to three 18650 rechargeable Li-ion batteries
- ◆ Six modes including 5 brightness levels and flashing mode
- ◆ USB rechargeable with low battery indicator
- ◆ Serves as a portable power bank to charge other devices



ANSI/FSC		Eco	Low	Med	High	Turbo
OUTPUT LUMENS		10	50	100	350	650
RUNTIME	2600mAh	300h	70h	38h	9h	4h 30min
	3500mAh	400h	93h	51h	12h	6h
DISTANCE		115ft (35m)				
IMPACT RESISTANCE		1m				
WATERPROOF		IPX-7, waterproof underwater to 1m				
SIZE		Height: 5.4" (136mm) Diameter: 3.7" (93mm)				
WEIGHT		14.5 oz. (412g) excluding battery				



OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery

NEW

# BC05R

## 10 LUMENS



- ◆ Max 10 lumen output from built-in 240mAh Li-polymer battery
- ◆ Four modes including two brightness levels and two flashing modes
- ◆ Micro-USB rechargeable with battery level indicator
- ◆ Also use as a headlamp or backpack light



RECHARGEABLE



RED LED



FLASHING



LOW VOLTAGE WARNING



BATTERIES INCLUDED

OPTIONAL ACCESSORIES  
• None

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	2	10h	20ft (6m)	-	1m	IP66, rain/splash proof/dustproof
High	10	1h 48min				
Flash 1	2	40h				
Flash 2	2	72h				
SIZE	Length: 2" (51mm) Width: 0.87" (22mm) Height: 0.83" (21mm)					
WEIGHT	0.67 oz. (19g) including battery					

# BC21R

## 880 LUMENS





RECHARGEABLE



BATTERIES INCLUDED



LOW VOLTAGE WARNING



FLASHING

- ◆ Max 880 lumen output from one 18650 Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ New quick-release bike mount
- ◆ Dual Distance Beam System

OPTIONAL ACCESSORIES  
• ARB-L18 Battery  
• ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	100	15h 50min	410ft (125m)	-	1m	IPX-6, water resistant
Medium	200	8h 30min				
High	380	4h 30min				
Turbo	880	1h 20min				
SIZE	Length: 4.4" (113mm) Width: 1.6" (40.5mm) Height: 1.7" (42mm)					
WEIGHT	3.2 oz. (91g) excluding battery and bike mount					


NEW

# BC21R v2.0


## 1000 LUMENS




- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Type-C USB rechargeable with battery level indicator
- ◆ Quick release bike mount




RECHARGEABLE



BATTERIES INCLUDED



LOW VOLTAGE WARNING



FLASHING

OPTIONAL ACCESSORIES  
• ARB-L18 Battery  
• ARB-L18 USB Battery

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	50	40h	144ft (44m)	-	1m	IP66, rain/splash proof/dustproof
Medium	150	12h	203ft (62m)			
High	400	6h	282ft (86m)			
Turbo	1000	2h	427ft (130m)			
Flash	400	-	-			
SIZE	Length: 4.6" (116mm) Width: 1.2" (31mm) Height: 1.2" (30mm)					
WEIGHT	3.5oz. (100g) excluding battery					



NEW

# BC25R

## 600 LUMENS


- ◆ Max 600 lumen output from the built-in 2600mAh Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Cut-off facula line for safer commuting in traffic
- ◆ Micro-USB rechargeable with battery level indicator



ANSI/FSC	Low	Medium	High	Turbo	Flash
OUTPUT LUMENS	50	150	350	600	150
RUNTIME	36h	15h	7h	2h	-
DISTANCE	105ft (32m)	174ft (53m)	259ft (79m)	348ft (106m)	-
IMPACT RESISTANCE	1m				
WATERPROOF	IP66 - rain resistant/dust proof				
SIZE	Length: 4.4" (113mm) Width: 1.25" (32mm) Height: 1.2" (31mm)				
WEIGHT	5.5 oz. (155 grams) including mount and battery				

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery



# BC30

## 1800 LUMENS

- ◆ Max 1800 lumen output from CR123A or 18650 batteries
- ◆ Six modes including four brightness levels, burst and flashing mode
- ◆ Temporary burst controlled by remote pressure switch
- ◆ Dual Distance Beam System



ANSI/FSC	Low	Med	High	Turbo	Burst
OUTPUT LUMENS	100	200	500	1200	1800
RUNTIME	20h	11h	5h	1h 50min	-
DISTANCE	558ft (170m)				
IMPACT RESISTANCE	1m				
WATERPROOF	IPX-6, water resistant				
SIZE	Length: 5" (126.7mm) Width: 2" (50mm) Height: 1.3" (31.8mm)				
WEIGHT	5.7 oz (161g) excluding batteries and handlebar mount				

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery



**BEST SELLER**

# BC30R

1600 LUMENS



- ◆ Max 1800 lumen output from the built-in 5200mAh micro-USB rechargeable battery
- ◆ Dual Distance Beam System with OLED digital display
- ◆ Quick-Release bicycle mount
- ◆ Upgraded remote pressure switch for fast mode selection

ANSI/FSC						
MODE	OUTPUT LUMENS	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANCE	WATERPROOF
Low	50	36h	92ft (28m)	-	1m	IP66 - rain resistant, dustproof
Medium	150	16h 10min	154ft (47m)			
High	400	7h 20min	249ft (76m)			
Turbo	1000	2h 40min	400ft (122m)			
Burst	1800	-	528ft (161m)			
SIZE	Length: 4.5" (114mm) Width: 2.0" (50.5mm) Height: 1.3" (31.8mm)					
WEIGHT	7.8 oz. (221.6g) excluding handlebar mount					

OPTIONAL ACCESSORIES  
 • None

**NEW**

# BC35R

1800 LUMENS



- ◆ Max 1800 lumen output from built-in 5200mAh Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Cut-off facula line for safer commuting in traffic
- ◆ Micro-USB rechargeable with battery level indicator

ANSI/FSC	Low	Medium	High	Turbo	Burst	Flash
OUTPUT LUMENS	45	150	400	1000	1800	150
RUNTIME	28h	12h	6h 30min	2h 12min*	-	-
DISTANCE	82ft (25m)	148ft (45m)	240ft (73m)	390ft (119m)	479ft (146m)	-
INTENSITY	152cd	503cd	1332cd	3542cd	5367cd	-
IMPACT RESISTANCE	1m					
WATERPROOF/DUST PROOF	IP66, rain/splash proof / dust proof					
SIZE	Length: 4.68" (119mm) Width: 1.97" (50mm) Height: 1.22" (31mm)					
WEIGHT	9.9 oz. (283g) including mount and battery					

OPTIONAL ACCESSORIES

- ARB-L18 Battery
- ARB-L18 USB Battery







## OPTIONAL ACCESSORIES

Fenix continues to develop accessories so that you get the most out of your light. From Belt Clips to Bike Mounts, Diffuser Tips to Colored Filters, Fenix accessories provide expanded applications with simple attachment and operation.

### BELT CLIP

**AB02**

Turn belt, waistband, pack strap or hat into a hands-free flashlight holder. Built for smaller lights, this clip features durable materials and a click-to-lock rotating mechanism.

**ALC-01** **NEW**

Quick release belt clip with the ability to rotate the holster up to 300°; allowing for hands-free use of your flashlight. Made of rugged nylon and fiberglass.

### BIKE MOUNT

**ALB-10**

Take Fenix flashlights on the road and trail with this fully-adjustable mounting system. Capable of holding small to mid-sized lights, this mount can be moved from bike to bike without using tools.

### DIFFUSER TIP

**AOD-S/AOD-M/AOD-L**

Transform your Fenix light into a reading, signal or emergency light. Attachment is quick and secure with materials designed for field use.

### FILTER ADAPTERS

**AOF-S/AOF-S+/AOF-M/AOF-L (RED, GREEN, BLUE)**

Improve night-time visibility and avoid easy detection with these colored filters. Durable with an anti-roll design, they improve map reading, navigation and tracking.

### HEADBAND

**HB01**

Make the most of every moment with this Fenix exclusive. Simple flashlight attachment and strong elastic allow use in cramped quarters or wide-open spaces.

### HEADLAMP HELMET MOUNTS

**ALG-03/ALD-02**

Quickly attach and detach the HL55 or HL60R headlamp to any outdoor or work helmet —making sure the headlamp stays securely fixed to your helmet.

### HEADLAMP GEAR BAG **NEW**

**APB-20**

Ultra-compact headlamp gear bag made of high-strength nylon cloth. Includes an inner mesh cloth bag large enough to carry extra batteries.



## OPTIONAL ACCESSORIES (CONTINUED)

### HELMET FLASHLIGHT CLIP **NEW**

**ALD-04**

Made for fire-fighters, this helmet flashlight clip is made of PA66+30%GF materials that are high-temperature and corrosion resistant.



### HOLSTERS

**ALP-MT-KH (KHAKI)/ALP-MT-BK (BLACK)/ALP-MT-OL (OLIVE)**

Practical small pouch for flashlights, knives and multi tools. Wide compatibility with adjustable lid. Secured by the strap with snap fastener or detachable bungee cord.



### RAIL MOUNT

**ALG-00/ALG-01**

Mount Fenix reliability to a Picatinny/Weaver rail with this anodized aluminum mount. Steel hex screws ensure positive engagement with a matte black finish for a professional appearance.



### REMOTE SWITCH

**AER-01/AER-02/AER-03**

Enable light control with minimal hand movement thanks to this switching system. Precision components mean reliable performance under adverse conditions.



### SNAP HOOK CARABINER

**ALB-20**

Multi-purpose snap hook perfect to help you quickly access items hooked to your belt or pack. Featuring a quick-release latch, bottle opener, and screw driver.



### TRAFFIC WAND

**AOT-S/AOT-M/AOT-L**

Point the way to safety with this click-and-go accessory from Fenix. Long-distance visibility improves as does close-in traffic management.




### UNIVERSAL MOUNT

**BIOBKMT**

Perfect tool for any flashlight owner who needs to attach their flashlight to a tent, camper, bicycle, tree—just about anywhere where hands-free light is needed.





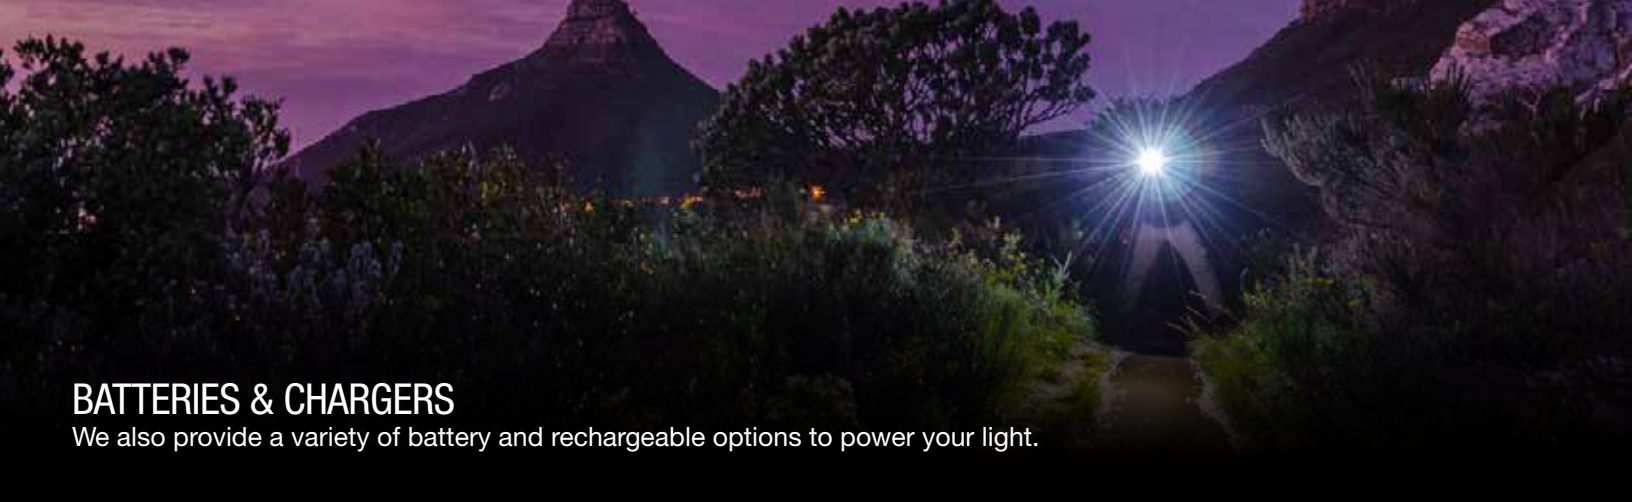

## BATTERIES & CHARGERS

We also provide a variety of battery and rechargeable options to power your light.



### SINGLE BAY CHARGERS

#### ARE-X1/ARE-X1+

Specifically designed for 18650 rechargeable batteries, these chargers feature a constant-current charge which safely extends the health and lifespan of the battery.



### 2-BAY CHARGERS

#### ARE-X2/ARE-A2 **NEW**

Specifically designed for 18650 rechargeable batteries, these chargers feature a constant-current charge which safely extends the health and lifespan of the battery.



### 4-BAY DIGITAL CHARGER

#### ARE-A4 **NEW**

Built for all types of batteries from 10440 up to 26650, AAA to AA. Automatically chooses the correct charging mode for each type of battery.



### SOLAR POWER CHARGER

#### ARS-11 **NEW**

This portable charger has eight SunPower® solar panels that can generate 12W of power. Dressed in digital camo, this 900D antique fabric charger case also includes a mobile phone pouch and portable hanging buckle.



### RECHARGEABLE BATTERIES

Fenix rechargeable batteries are designed for today's high-intensity flashlights. Featuring a large capacity, triple over-heat protection, built-in over-charge protection and other safety features, these batteries from Fenix are your best choice for powering your Fenix light.

MODEL	TYPE	CAPACITY	VOLTAGE
ARB-L14-800	14500	800 mAh	3.6v
ARB-L14-1600U	14500 with USB Port	1600 mAh	1.5v
ARB-L16-700	16340	700 mAh	3.7v
ARB-L16-700U	16340 with USB Port	700 mAh	3.6v
ARB-L18-2600	18650	2600 mAh	3.6v
ARB-L18-2600U	18650 with USB Port	2600 mAh	3.6v
ARB-L18-3400	18650	3400 mAh	3.6v
ARB-L18-3500	18650	3500 mAh	3.6v
ARB-L18-3500U	18650 with USB Port	3500 mAh	3.6v
ARB-L4-4800	26650	4800 mAh	3.7v



***fenixlighting.com***

CUSTOMER SERVICE  
(888) 775-9996 (7:00 am-4:00 pm MST)  
customerservice@fenixlighting.com

FENIX LIGHTING US HEADQUARTERS  
10488 W. Centennial Rd. #301  
Littleton, CO 80127

© Fenix Lighting US  
Specifications subject to change without notice.