


2020 PRODUCT CATALOG




FENIX[®]

LIGHTING FOR EXTREMES

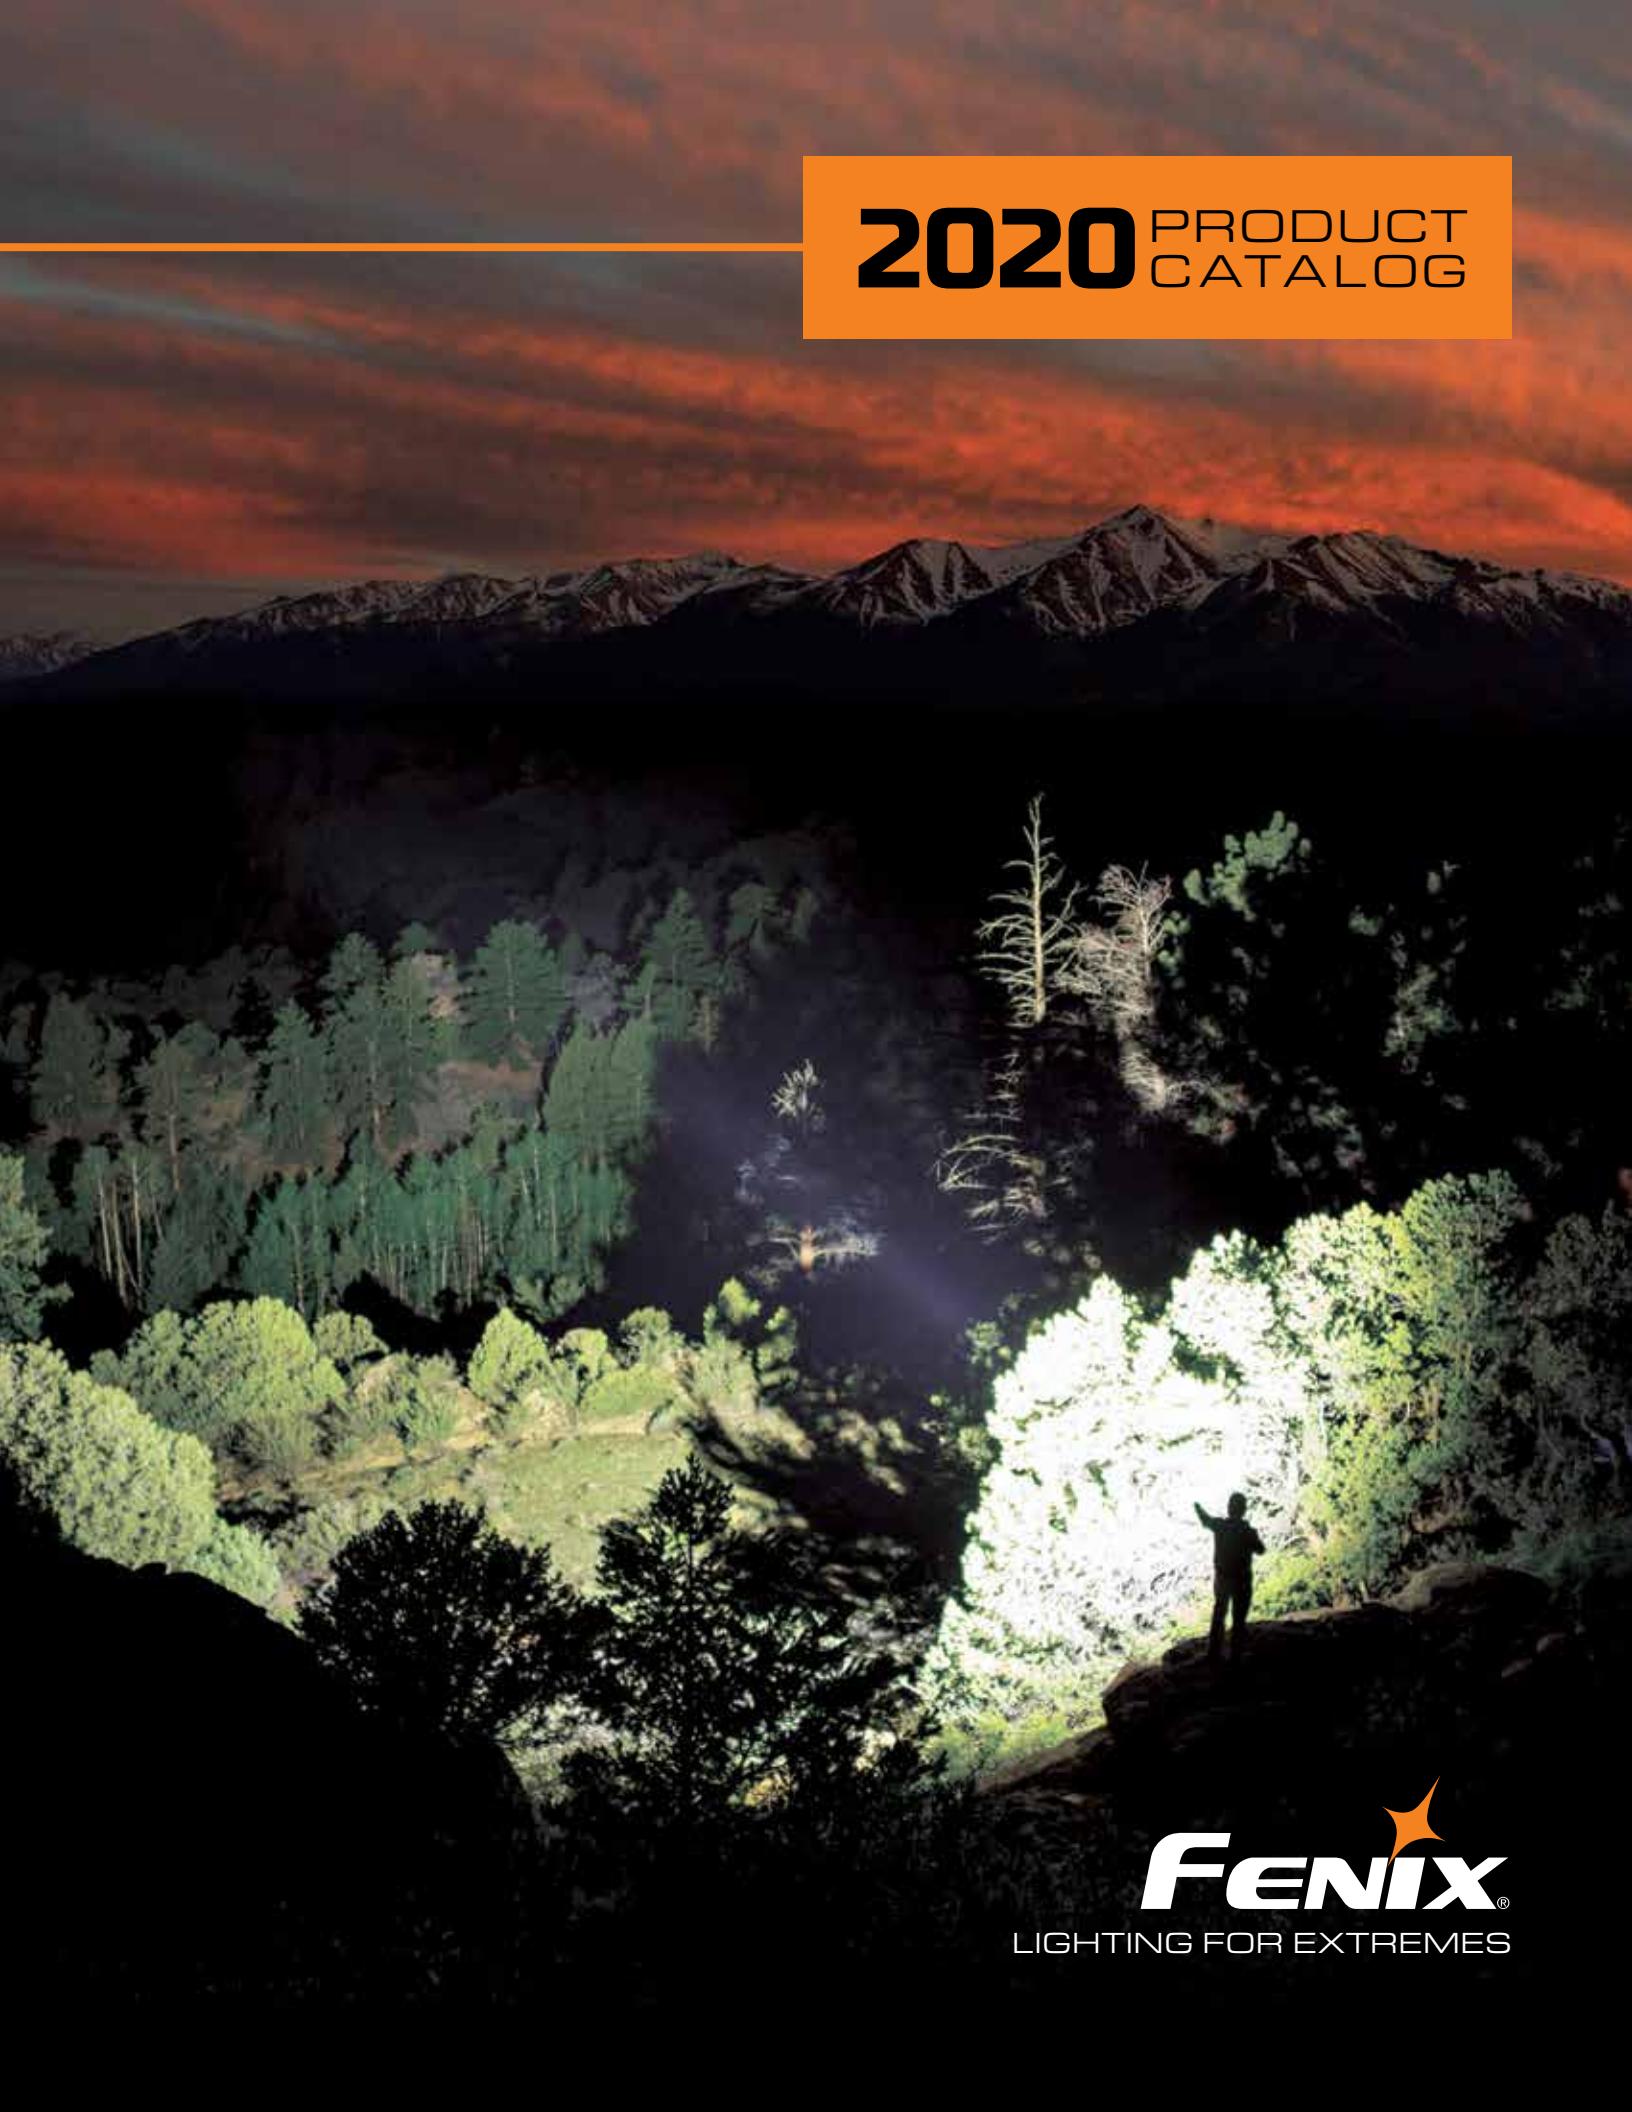

Based in Shenzhen, China, Fenix designs and manufactures incredible lighting products in its company-owned facility. Fenix is committed to create lights that not only feature the best in lighting technology, but are also built to the highest standards for durability and longevity. Unlike contract manufacturers or subcontractors, Fenix takes ownership of the quality and performance of each and every light and subjects each to a battery of tests from their quality assurance professionals—ensuring the light is built to last.

FENIX LIGHTING US is the United States distributor for the Fenix line of lighting products and is committed to providing you with the best customer service. With facilities in Littleton, CO and Monticello, AR, Fenix Lighting US is poised to fulfill your needs quickly and efficiently.

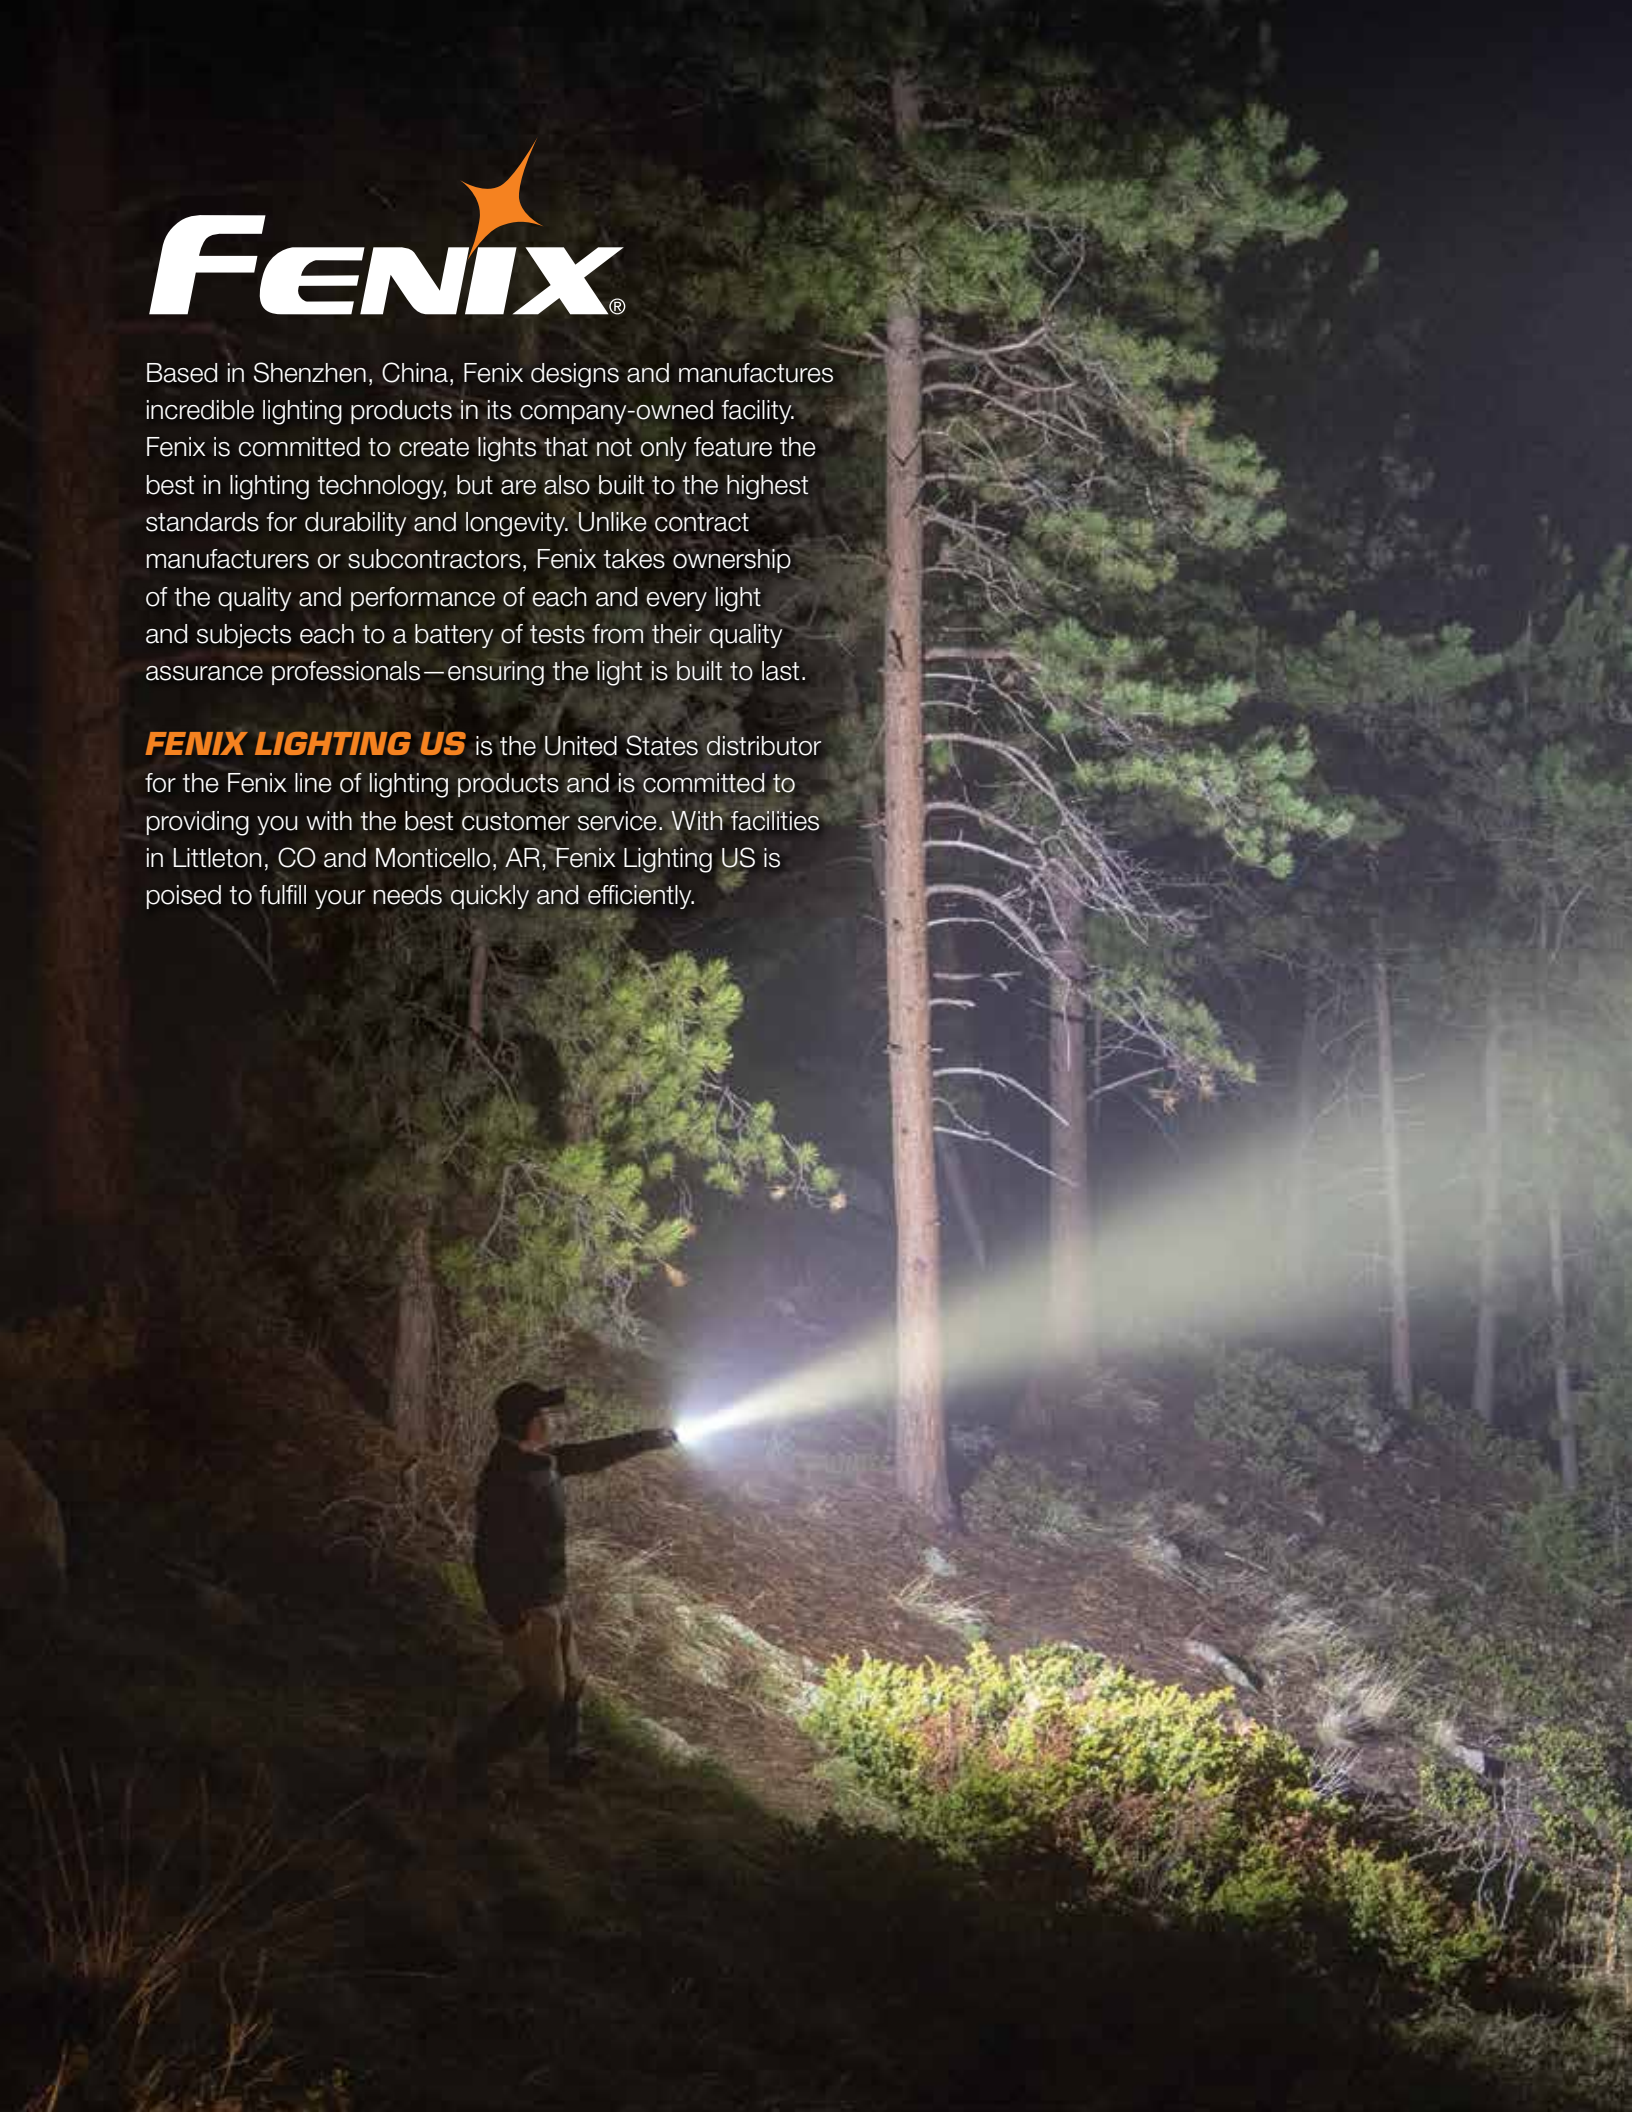

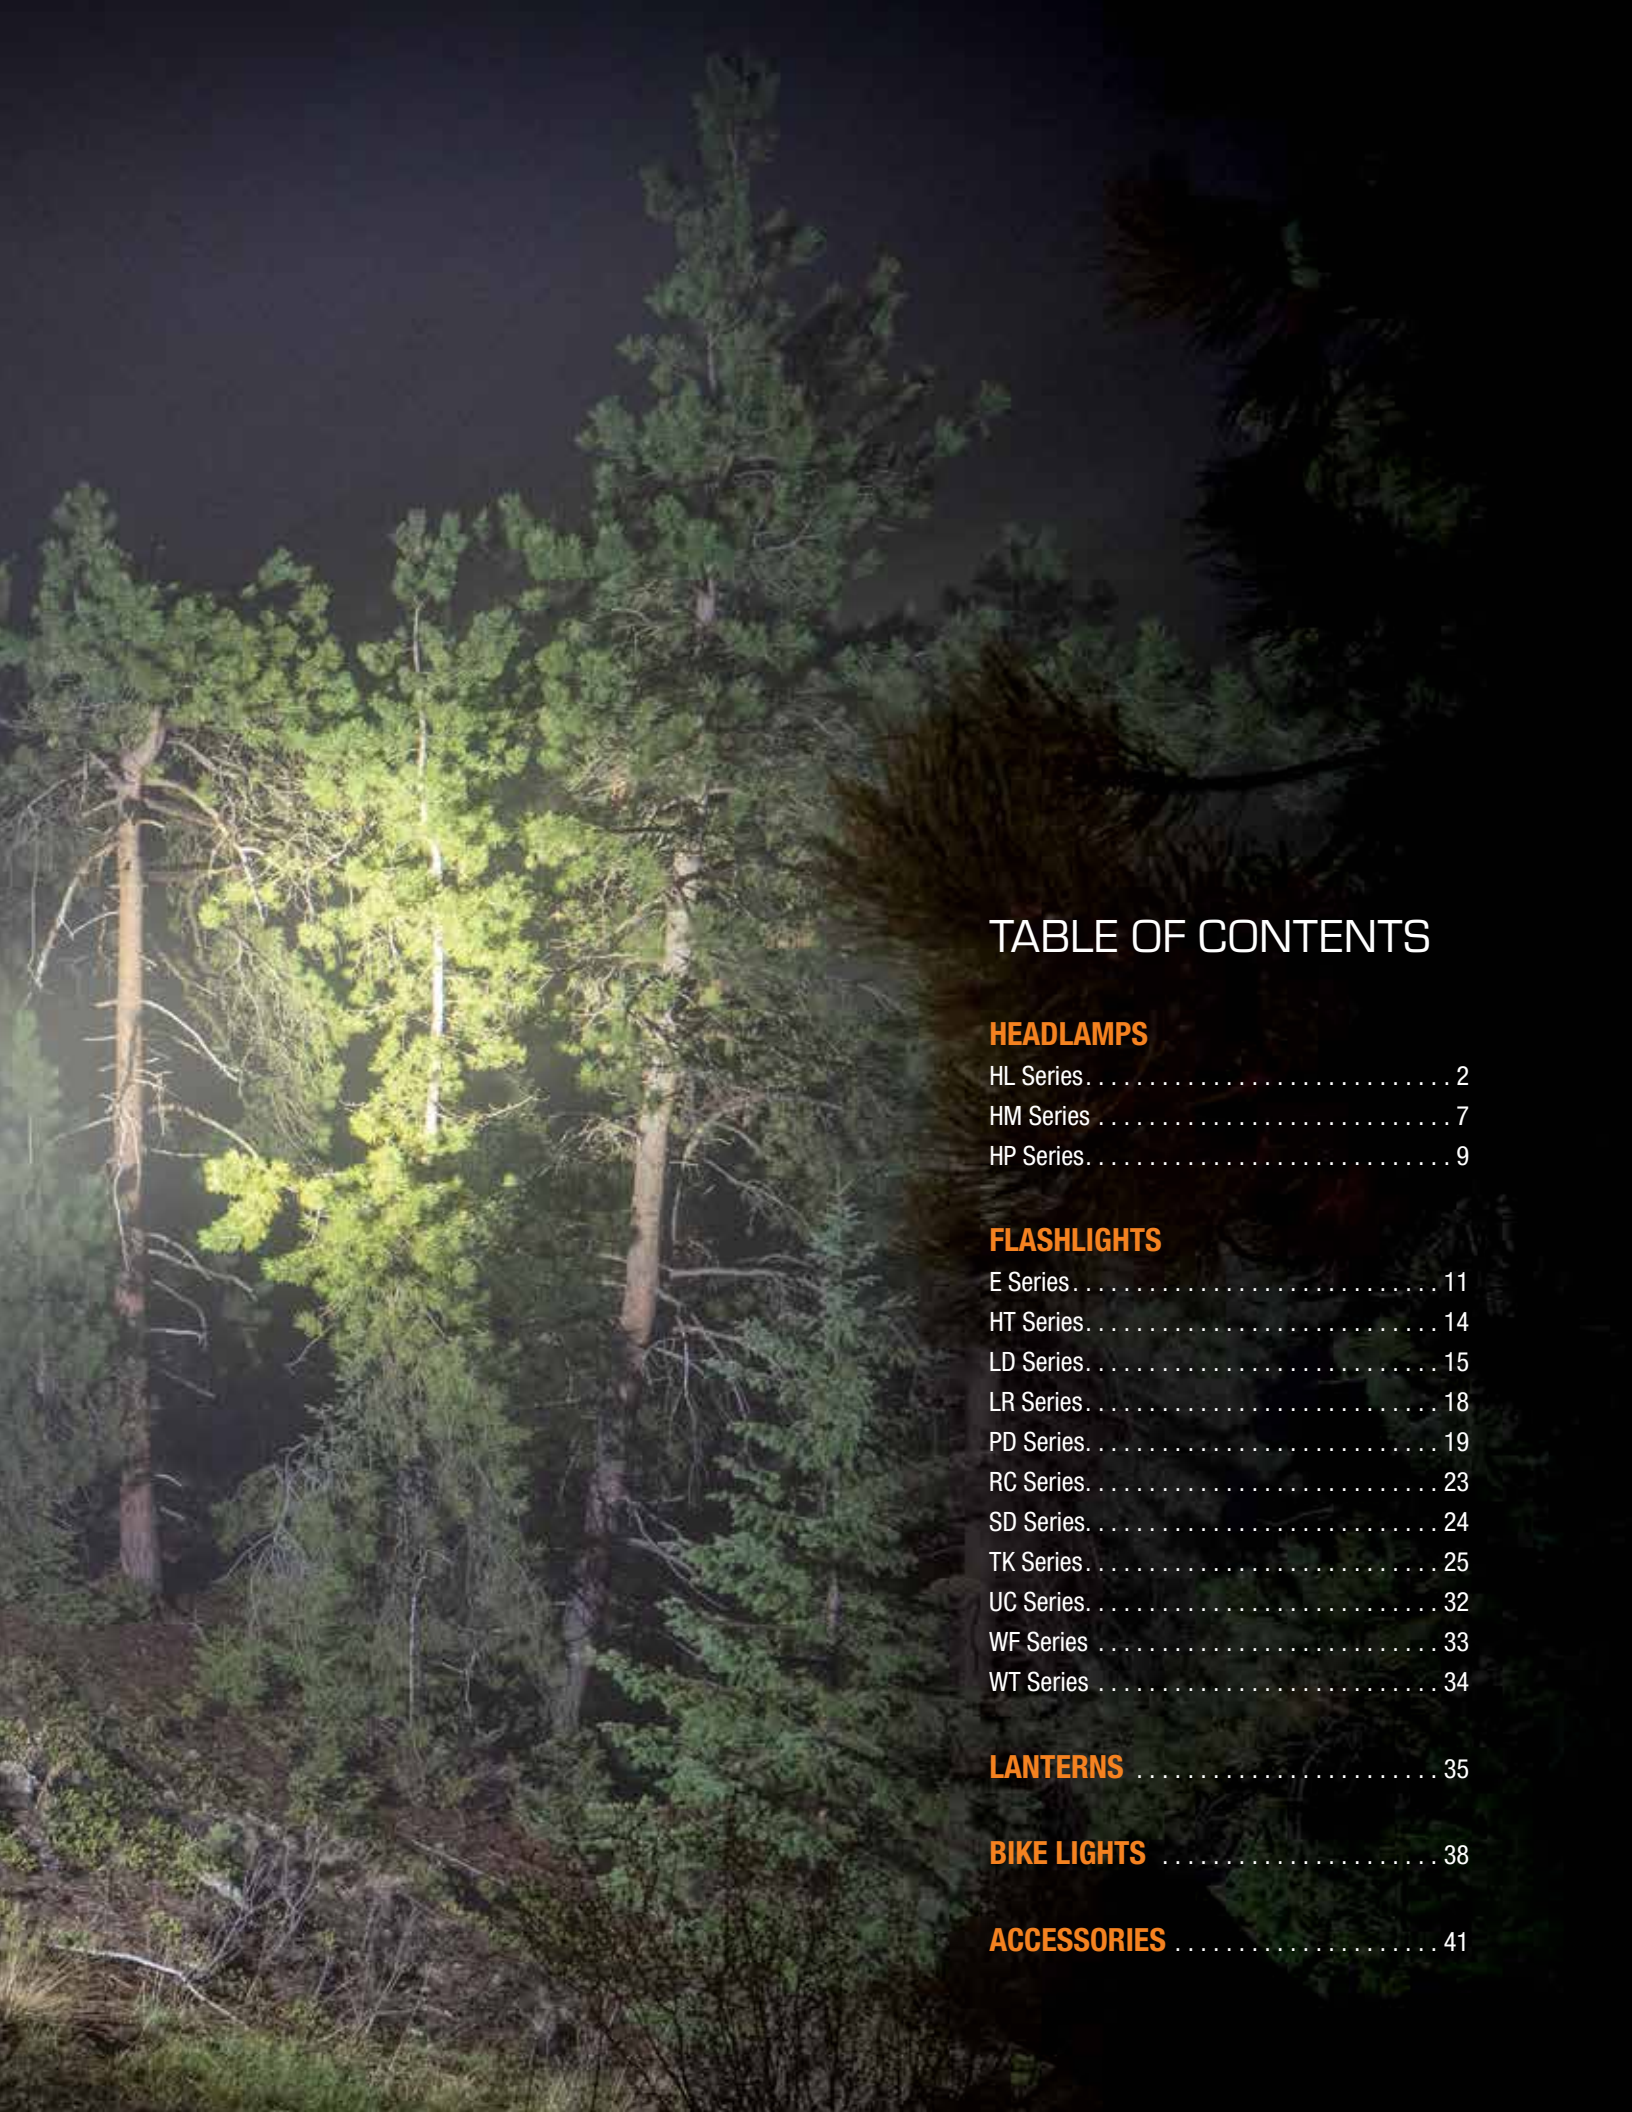


TABLE OF CONTENTS

HEADLAMPS

| | |
|---------------------|---|
| HL Series | 2 |
| HM Series | 7 |
| HP Series | 9 |

FLASHLIGHTS

| | |
|---------------------|----|
| E Series | 11 |
| HT Series | 14 |
| LD Series | 15 |
| LR Series | 18 |
| PD Series | 19 |
| RC Series | 23 |
| SD Series | 24 |
| TK Series | 25 |
| UC Series | 32 |
| WF Series | 33 |
| WT Series | 34 |

| | |
|--------------------|----|
| LANTERNS | 35 |
|--------------------|----|

| | |
|-----------------------|----|
| BIKE LIGHTS | 38 |
|-----------------------|----|

| | |
|-----------------------|----|
| ACCESSORIES | 41 |
|-----------------------|----|

HEADLAMPS

A hiker wearing a blue jacket, brown pants, and a green backpack is walking on a dirt trail at night. The hiker is wearing a headlamp that casts a bright beam of light onto the path ahead. The background shows a dark, hilly landscape with some trees and bushes illuminated by the light. The overall scene is dark, with the headlamp providing the primary source of illumination.

HL12R


400 LUMENS



OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag

- ◆ Max 400 lumen output from built-in 1000mAh Li-polymer battery
- ◆ Eight modes including five brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator



| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|--------|--|---------|-------------|-----------|-------------------|----------------------------------|
| Eco | 4 | 110h | 23ft (7m) | 12cd | 1m | IP66, rain/splashproof/dustproof |
| Low | 30 | 33h | 56ft (17m) | 72cd | | |
| Medium | 70 | 13h | 85ft (26m) | 169cd | | |
| High | 130 | 8h | 118ft (36m) | 324cd | | |
| Burst | 400 | 1h* | 210ft (64m) | 1024cd | | |
| Red | 1 | 66h | 10ft (3m) | 2cd | | |
| SIZE | Length: 2.2" (56mm) Width: 1.6" (40mm) Height: 1.3" (31.9mm) | | | | | |
| WEIGHT | 2.6 oz. (73.3g) including headband/battery | | | | | |

HL18R

400 LUMENS



OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag

- ◆ Max 400 lumen output from a Li-ion battery pack or three AAA batteries
- ◆ Seven modes including four brightness levels in spotlight mode, two levels in floodlight mode, and SOS
- ◆ Two separate switches control the spotlight and floodlight modes
- ◆ Reflective headband includes a silicone sweat guard

| ANSI/FSC | Spotlight Mode | | | | Floodlight Mode | | | |
|-------------------|--|------------|-------------|-------------|-----------------|------------|-----------|-----|
| | Low | Med | High | Turbo | Low | High | S.O.S. | |
| OUTPUT LUMENS | 30 | 70 | 130 | 400 | 4 | 30 | 30 | |
| RUNTIME | Lithium | 48h | 17h 30min | 12h 30min | 8h 30min | 145h | 54h | 72h |
| | AAA | 48h | 22h | 14h | 9h | 150h | 56h | 80h |
| DISTANCE | 66ft (20m) | 98ft (30m) | 131ft (40m) | 249ft (76m) | 16ft (5m) | 33ft (10m) | 20ft (6m) | |
| INTENSITY | 92cd | 225cd | 420cd | 1466cd | 6cd | 27cd | 30cd | |
| IMPACT RESISTANCE | 1m | | | | | | | |
| WATERPROOF | IP66, rain/splash proof dustproof | | | | | | | |
| SIZE | Length: 2.3" (57.7mm) Width: 1.7" (42.3mm) Height: 1.5" (37mm) | | | | | | | |
| WEIGHT | 2.8 oz. (80g) including battery, headband & holder | | | | | | | |

NEW

HL18RW

500 LUMENS



- ◆ Max 500 lumen output from included 1300mAh
- ◆ Li-polymer battery back or three AAA batteries
- ◆ Six modes including three spotlight levels, two floodlight levels, and SOS
- ◆ USB rechargeable with battery level indicator
- ◆ Extremely light weight; 2.8 oz



OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag



Features a Cool White LED
— perfect for running

| ANSI/FSC | Spotlight Mode | | | Floodlight Mode | | | |
|--------------------------|--|-------------|-------------|-----------------|------------|------------|------|
| | Low | Med | Turbo | Low | High | S.O.S. | |
| OUTPUT LUMENS | 30 | 130 | 500 | 4 | 30 | 30 | |
| RUNTIME | Lithium | 70h | 18h | 9h* | 150h | 60h | 120h |
| | AAA | 78h | 17h | 6h* | 150h | 48h | 96h |
| DISTANCE | 59ft (18m) | 131ft (40m) | 279ft (85m) | 16ft (5m) | 39ft (12m) | 39ft (12m) | |
| INTENSITY | 78cd | 398cd | 1783cd | 8cd | 39cd | 39cd | |
| IMPACT RESISTANCE | 1m | | | | | | |
| WATERPROOF | IP66, rain/splash proof dustproof | | | | | | |
| SIZE | Length: 2.3" (57.7mm) Width: 1.7" (42.3mm) Height: 1.5" (37mm) | | | | | | |
| WEIGHT | 2.8 oz. (80g) including battery, headband & holder | | | | | | |

HL26R

450 LUMENS



- ◆ Max 450 lumen output from a built-in 1600mAh Li-polymer battery
- ◆ Seven modes including four brightness levels in spotlight mode, two levels in floodlight mode, and SOS
- ◆ Two separate switches control the spotlight and floodlight modes
- ◆ Reflective headband includes a silicone sweat guard to keep sweat out of your eyes

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag


| ANSI/FSC | Spotlight Mode | | | | Floodlight Mode | | |
|--------------------------|---|-------------|-------------|--------------|-----------------|------------|--------|
| | Low | Med | High | Burst | Low | High | S.O.S. |
| OUTPUT LUMENS | 30 | 70 | 130 | 450 | 4 | 40 | 40 |
| RUNTIME | 25h | 12h | 6h | 1h 30min* | 100h | 13h | 26h |
| DISTANCE | 98ft (30m) | 138ft (42m) | 187ft (57m) | 328ft (100m) | 13ft (4m) | 33ft (10m) | — |
| INTENSITY | 225cd | 450cd | 810cd | 2564cd | 4cd | 24cd | — |
| IMPACT RESISTANCE | 1m | | | | | | |
| WATERPROOF | IP66, rain/splash proof dustproof | | | | | | |
| SIZE | Length: 2.56" (65mm) Width: 1.73" (44mm) Height: 1.46" (37mm) | | | | | | |
| WEIGHT | 3.03 oz. (86g) including battery | | | | | | |

HL30

300 LUMENS



- OPTIONAL ACCESSORIES**
- ◆ APB-20 Gear Bag
 - ◆ ARB-14 Battery



- ◆ Max 300 lumen output from two AA batteries (included)
- ◆ Eight modes including five brightness levels, SOS, red reading light, and red flashing
- ◆ Wide-range floodlight illumination


| ANSI/FSC | Eco | Low | Med | High | Turbo | Red Light | Red Flash |
|--------------------------|--|------------|------------|-------------|-------------|-----------|-----------|
| OUTPUT LUMENS | 4 | 30 | 70 | 130 | 300 | 1 | 1 |
| RUNTIME | Alkaline | 200h | 71h | 41h | 9h | 4.5h | 170h |
| | Ni-MH | 200h | 65h | 35h | 12h | 7h | 170h |
| DISTANCE | 20ft (6m) | 52ft (16m) | 75ft (23m) | 115ft (35m) | 164ft (50m) | 13ft (4m) | 13ft (4m) |
| INTENSITY | 10cd | 64cd | 137cd | 306cd | 610cd | 4cd | 4cd |
| IMPACT RESISTANCE | 1m | | | | | | |
| WATERPROOF | IP67, waterproof underwater to 1m, dustproof | | | | | | |
| SIZE | Length: 2.5" (64mm) Width: 2.0" (50mm) Height: 1.5" (38mm) | | | | | | |
| WEIGHT | 2.6 oz. (73.5g) excluding batteries | | | | | | |

HL32R

600 LUMENS



- OPTIONAL ACCESSORIES**
- ◆ APB-20 Gear Bag




- ◆ Max 600 lumen output from built-in 2000mAh Li-polymer battery
- ◆ Nine modes including six brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator

| ANSI/FSC | | | | | | |
|---------------|--|----------|-------------|-----------|-------------------|-----------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATERPROOF |
| Eco | 4 | 200h | 23ft (7m) | 13cd | 1m | IP66, rain/splash proof dustproof |
| Low | 30 | 60h | 52ft (16m) | 65cd | | |
| Medium | 70 | 24h | 75ft (23m) | 137cd | | |
| High | 130 | 14h | 112ft (34m) | 290cd | | |
| Turbo | 300 | 4h 30min | 161ft (49m) | 593cd | | |
| Burst | 600 | 1h* | 240ft (73m) | 1333cd | | |
| Red | 1 | 100h | 13ft (4m) | 4cd | | |
| SIZE | Length: 2.5" (64mm) Width: 1.8" (46mm) Height: 1.5" (37.5mm) | | | | | |
| WEIGHT | 3.8 oz. (108g) including headband/battery | | | | | |

HL40R

600 LUMENS



- ◆ Max 600 lumen output from built-in 2000mAh Li-polymer battery
- ◆ Seven modes including five brightness levels, SOS, and reading light
- ◆ Rotating ring focuses the beam from spotlight to floodlight
- ◆ Micro-USB rechargeable

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag

| ANSI/FSC | Reading | Eco | Low | Medium | High | Burst | |
|--------------------------|--|------------|------------|-------------|-------------|-------------|--------------|
| OUTPUT LUMENS | 4 | 30 | 70 | 130 | 300 | 600 | |
| RUNTIME | 200h | 50h | 22h | 11h | 4h 30min | 1h 20min* | |
| DISTANCE | SPOT | 33ft (10m) | 98ft (30m) | 151ft (46m) | 210ft (64m) | 315ft (96m) | 482ft (147m) |
| | FLOOD | 13ft (4m) | 30ft (9m) | 46ft (14m) | 62ft (19m) | 95ft (29m) | 141ft (43m) |
| INTENSITY | SPOT | 27cd | 230cd | 535cd | 1021cd | 2316cd | 5426cd |
| | FLOOD | 4cd | 21cd | 49cd | 93cd | 212cd | 472cd |
| IMPACT RESISTANCE | 1m | | | | | | |
| WATERPROOF | IP66, rain/splash proof / dustproof | | | | | | |
| SIZE | Length: 2.7" (68mm) Width: 2.1" (54mm) Height: 1.7" (42mm) | | | | | | |
| WEIGHT | 4.6 oz. (130g) including headband | | | | | | |



Twist the head to focus between spotlight and floodlight

HL55

900 LUMENS



Neutral White LED for better color rendering

OPTIONAL ACCESSORIES

- ◆ ALG-03 Helmet Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ Max 900 lumen from one 18650 Li-ion battery or two CR123A batteries
- ◆ Five modes including four brightness levels and burst
- ◆ All-metal housing and waterproof to 2 meters
- ◆ Optimum output-to-weight ratio



| ANSI/FSC | | | | | | |
|---------------|---|----------|--------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATERPROOF |
| Eco | 10 | 150h | 381ft (116m) | 3380cd | 1m | IPX-8, waterproof underwater to 2m |
| Low | 55 | 30h | | | | |
| Medium | 165 | 10h | | | | |
| High | 420 | 3h 45min | | | | |
| Burst | 900 | - | | | | |
| SIZE | Length: 3.3" (84mm) Diameter: 1.8" (46mm) Head: 1.9" (48mm) | | | | | |
| WEIGHT | 4.1 oz (115g) excluding batteries | | | | | |

HL60R

950 LUMENS



Micro USB Rechargeable
included 18650 li-ion battery

- ◆ 950 lumen output from one rechargeable 18650 Li-ion battery
- ◆ Five brightness levels plus red light alert mode
- ◆ Micro-USB rechargeable
- ◆ Neutral white light for better color rendering



OPTIONAL ACCESSORIES

- ◆ ALG-03 Helmet Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | | | | | | |
|----------|--|---------|--------------|-----------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATERPROOF |
| Red | 1 | 100h | – | – | 1m | IPX-8, waterproof underwater to 2m |
| Eco | 5 | 100h | 26ft (8m) | 18cd | | |
| Low | 50 | 29h | 89ft (27m) | 179cd | | |
| Medium | 150 | 10h | 151ft (46m) | 536cd | | |
| High | 400 | 3h | 249ft (76m) | 1430cd | | |
| Turbo | 950 | 48min | 381ft (116m) | 3396cd | | |
| SIZE | Length: 3.4" (87mm) Width: 1.8" (46mm) Height: 2.0" (51mm) | | | | | |
| WEIGHT | 4.3 oz. (121g) excluding batteries | | | | | |

HM23

240 LUMENS



- ◆ Max 240 lumen output from the included AA battery
- ◆ One switch controls three brightness levels
- ◆ Extremely light weight; 1.5 oz.
- ◆ Waterproof and dustproof

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag
- ◆ ARB-L14 Battery

| ANSI/FSC | Low | Medium | Turbo |
|--------------------------|--|------------|-------------|
| OUTPUT LUMENS | 4 | 70 | 240 |
| RUNTIME | 100h | 16h | 8h* |
| DISTANCE | 32ft (9.5m) | 98ft (30m) | 174ft (53m) |
| INTENSITY | 22cd | 280cd | 830cd |
| IMPACT RESISTANCE | 2m | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | |
| SIZE | Length: 2.7" (69.5mm) Width: 1.3" (33mm) Height: 1.6" (40mm) | | |
| WEIGHT | 1.5 oz. (43g) excluding battery | | |

BATTERIES INCLUDED

BATTERY LEVEL INDICATOR

HM50R

500 LUMENS



- ◆ Max 500 lumen output from one rechargeable 16340 Li-ion battery (included) or one CR123A battery
- ◆ White light LED with four brightness levels
- ◆ Micro-USB rechargeable
- ◆ Detachable silicone lamp holder

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag
- ◆ ARB-L16 Battery

| ANSI/FSC | Low | Medium | High | Turbo | |
|--------------------------|--|------------|-------------|-------------|----------|
| OUTPUT LUMENS | 4 | 30 | 130 | 500 | |
| RUNTIME | CR123A | 128h | 48h | 14h | 2h |
| | 16340 | 90h | 24h | 10h | 2h 30min |
| DISTANCE | 20ft (6m) | 66ft (20m) | 138ft (42m) | 262ft (80m) | |
| INTENSITY | 11cd | 104cd | 453cd | 1813cd | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 2.7" (67.5mm) Width: 1.3" (33mm) Height: 1.1" (28mm) | | | | |
| WEIGHT | 2.2 oz. (63g) excluding battery | | | | |

BATTERIES INCLUDED

BATTERY LEVEL INDICATOR

RECHARGEABLE

HM65R

1400 LUMENS



- ◆ Max 1400 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- ◆ Seven modes including four spotlight brightness levels and three floodlight levels
- ◆ Type-C USB rechargeable with battery level indicator
- ◆ Dual switches for separate control of spotlight and floodlight

OPTIONAL ACCESSORIES

- ◆ APB-20 Gear Bag
- ◆ ALG-03 Helmet Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

BATTERIES INCLUDED

RECHARGEABLE

BATTERY LEVEL INDICATOR

Independently Controlled SPOTLIGHT & FLOODLIGHT



| ANSI/FSC | Spotlight Mode | | | | Floodlight Mode | | |
|-----------------------------|--|-------------|--------------|--------------|-----------------|------------|-------------|
| | Low | Med | High | Turbo | Low | Med | High |
| OUTPUT LUMENS | 50 | 130 | 400 | 1000 | 8 | 130 | 400 |
| RUNTIME | 97h | 48h | 22h | 2h | 300h | 50h | 21h |
| DISTANCE | 121ft (37m) | 187ft (57m) | 331ft (101m) | 535ft (163m) | 20ft (6m) | 98ft (30m) | 180ft (55m) |
| INTENSITY | 350cd | 833cd | 2600cd | 6677cd | 9cd | 220cd | 762cd |
| IMPACT RESISTANCE | 2m | | | | | | |
| WATERPROOF/DUSTPROOF | IP68, waterproof underwater to 2m/dustproof | | | | | | |
| SIZE | Length: 3.2" (80.5mm) Width: 2.2" (55mm) Height: 1.6" (40mm) | | | | | | |
| WEIGHT | 3.4 oz. (97g) excluding battery | | | | | | |

NEW

HM61R

1200 LUMENS



Multi-use
Can be used as a
headlamp or right-
angle flashlight

- ◆ Max 1200 lumen output from an included 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Eight modes including five white levels and three red light levels
- ◆ Magnetic rechargeable with battery level indicator
- ◆ Large side switch operates all modes



- OPTIONAL ACCESSORIES**
- ◆ ALG-03 Helmet Mount
 - ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

| ANSI/FSC | Spotlight Mode | | | | | Floodlight Mode | | |
|-----------------------------|---|------------|-------------|-------------|--------------|-----------------|-----|------|
| | Eco | Low | Med | High | Turbo | Low | Med | High |
| OUTPUT LUMENS | 5 | 50 | 150 | 400 | 1200 | 1 | 5 | 5 |
| RUNTIME | 300h | 38h | 12h | 4h | 2h* | 400h | 80h | 160h |
| DISTANCE | 26ft (8m) | 92ft (28m) | 164ft (50m) | 262ft (80m) | 476ft (145m) | - | - | - |
| INTENSITY | 14cd | 195cd | 635cd | 1609cd | 5287cd | - | - | - |
| IMPACT RESISTANCE | 2m | | | | | | | |
| WATERPROOF/DUSTPROOF | IP68, waterproof underwater to 2m/dustproof | | | | | | | |
| SIZE | Length: 4.0" (101mm) Width: 1.8" (46mm) Height: 1.4" (36mm) | | | | | | | |
| WEIGHT | 3.5 oz. (99.5g) excluding battery | | | | | | | |

HP25R

1000 LUMENS

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery (included) or two CR123A batteries
- ◆ Nine modes including four brightness levels for both floodlight and spotlight and a red light
- ◆ Neutral white floodlight and long-range spotlight
- ◆ Micro-USB rechargeable battery case

| ANSI/FSC | Floodlight Mode | | | | Spotlight Mode | | | | |
|-------------------|--|------------|------------|-------------|----------------|-------------|--------------|--------------|-----|
| | Low | Med | High | Turbo | Low | Med | High | Turbo | Red |
| OUTPUT LUMENS | 4 | 30 | 130 | 350 | 30 | 130 | 350 | 1000 | 0.2 |
| RUNTIME | 150h | 40h | 9h | 2h 30min | 42h | 12h | 4h 30min | 1h 30min | 96h |
| DISTANCE | 20ft (6m) | 43ft (13m) | 82ft (25m) | 144ft (44m) | 112ft (34m) | 217ft (66m) | 358ft (109m) | 614ft (187m) | - |
| INTENSITY | 11cd | 46cd | 158cd | 484cd | 296cd | 1108cd | 3001cd | 8772cd | - |
| IMPACT RESISTANCE | 1m | | | | | | | | |
| WATERPROOF | IPX-6, rain/splash proof | | | | | | | | |
| SIZE | Light Size: Length: 2.4" (60mm) Width: 2.1" (54mm) Height: 1.3" (32.5mm) Battery Case: Length: 3.2" (82.5mm) Width: 2.0" (50mm) Height: 1.4" (35mm) | | | | | | | | |
| WEIGHT | 6.5 oz. (183.5g) weight excluding battery | | | | | | | | |



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

HP30R

1750 LUMENS

- ◆ Max 1750 lumen output from two 18650 Li-ion rechargeable batteries or four CR123A batteries
- ◆ Nine modes including four spotlight brightness levels and four floodlight levels plus SOS
- ◆ Switch between spotlight and floodlight or use them both simultaneously
- ◆ Battery pack can be used as a power bank



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery



| ANSI/FSC | | | | | | | |
|-----------|---|---------|----------|--------------|-------------------|------------|-------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATERPROOF | |
| FLOOD | Low | 5 | 400h | 23ft (7m) | 12.5cd | 1m | IP66, rain/splash proof / dustproof |
| | Med | 130 | 23h | 89ft (27m) | 180cd | | |
| | High | 400 | 6h | 151ft (46m) | 519cd | | |
| | Turbo | 750 | 4h | 200ft (61m) | 916cd | | |
| SPOTLIGHT | Low | 30 | 83h | 112ft (34m) | 288cd | | |
| | Med | 130 | 21h | 236ft (72m) | 1284cd | | |
| | High | 400 | 6h 30min | 407ft (124m) | 3820cd | | |
| | Turbo | 1000 | 4h | 663ft (202m) | 10268cd | | |
| SIZE | Light Size: Length: 3.0" (77mm) Width: 2.0" (52mm) Height: 1.4" (34mm) Battery Case: Length: 4.5" (115mm) Width: 2.2" (56mm) Height: 1.2" (30mm) | | | | | | |
| WEIGHT | 10.0 oz. (285g) weight excluding batteries | | | | | | |

A person wearing a dark vest and a cap stands in a grassy clearing at night, holding a flashlight that illuminates the surrounding pine trees and grass. The background shows a dark forest under a starry night sky. An orange horizontal line is visible on the left side of the page, extending from the edge to the start of the title box.

FLASHLIGHTS

E05

85 LUMENS



- ◆ Max 85 lumen output from one AAA battery
- ◆ Three brightness levels
- ◆ Twist switch. Broad beam lens.

| OPTIONAL ACCESSORIES |
|----------------------|
| ◆ None |

| ANSI/FSC | | | | | | |
|---------------|---|----------|--------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 8 | 15h | 148ft (45m) | 505cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 25 | 4h 15min | | | | |
| High | 85 | 45min | | | | |
| SIZE | Length: 2.6" (66.5mm) Diameter: 0.6" (15mm) | | | | | |
| WEIGHT | 0.4 oz (12.5g) excluding batteries | | | | | |

E12

130 LUMENS



- ◆ Max 130 lumen output from one AA battery
- ◆ Three brightness levels
- ◆ Twist switch

| OPTIONAL ACCESSORIES |
|----------------------|
| ◆ ALB-10 Bike Mount |
| ◆ ARB-L14 Battery |


| ANSI/FSC | | | | | | |
|---------------|--|----------|--------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 8 | 22h | 289ft (88m) | 1936cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 50 | 3h 30min | | | | |
| High | 130 | 1h | | | | |
| SIZE | Length: 3.5" (90mm) Diameter: 0.75" (19mm) | | | | | |
| WEIGHT | 1 oz. (28.5g) excluding batteries | | | | | |

NEW E06R

200 LUMENS



- ◆ Max 200 lumen output from the built-in 200mAh Li-polymer battery
- ◆ six lighting modes including four brightness levels, red light, and red flashing
- ◆ USB Type-C rechargeable
- ◆ All-metal housing for better heat dissipation and wear resistance



| OPTIONAL ACCESSORIES |
|----------------------|
| ◆ None |

| ANSI/FSC | Low | Med | High | Turbo | Red | Red Flash |
|--------------------------|--|------------|------------|-------------|----------|-----------|
| OUTPUT LUMENS | 5 | 30 | 80 | 200 | 5 | 5 |
| RUNTIME | 40h | 3h 30min | 2h | 1h | 5h 30min | - |
| DISTANCE | 26ft (8m) | 49ft (15m) | 82ft (25m) | 131ft (40m) | - | - |
| INTENSITY | - | - | - | - | - | - |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IP66, rain/splashproof/dustproof | | | | | |
| SIZE | Length: 1.8" (46mm) Width: 0.9" (24mm) Height: 0.5" (12mm) | | | | | |
| WEIGHT | 0.8 oz. (22g) excluding batteries | | | | | |

E16

700 LUMENS



**Two-Position
Body Clip**
Clip to a hat for
hands-free lighting



MAGNETIC TAIL
Put light where
you need it

- ◆ Max 700 lumen output from one 16340 Li-ion battery or 300 lumens from one CR123A battery
- ◆ Stainless-steel side switch operates four brightness levels plus strobe
- ◆ Magnetic tail and two-way body clip



OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ ARB-L16 Battery

| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|---------------|---|-----------|--------------|-----------|-------------------|--|
| Low | 3 | 70h | 43ft (13m) | 40cd | 1m | IP68, waterproof underwater to 2m/ dustproof |
| Medium | 30 | 11h 55min | 102ft (31m) | 240cd | | |
| High | 150 | 2h | 217ft (66m) | 1100cd | | |
| Turbo | 700 | 1h 5min | 466ft (142m) | 5050cd | | |
| SIZE | Length: 2.0" (51mm) Diameter: 0.7" (19mm) Head: 0.8" (21mm) | | | | | |
| WEIGHT | 0.7 oz. (21g) excluding battery | | | | | |

E18R

750 LUMENS



OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ ARB-L16 Battery

- ◆ Max 750 lumen output from one included 16340 Li-ion battery
- ◆ Five lighting modes including four brightness levels and strobe
- ◆ Stainless steel side switch with lock-out function and built-in battery level indicator
- ◆ Magnetic USB port and cable



| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|---------------|---|-----------|--------------|-----------|-------------------|--|
| Low | 5 | 70h | 46ft (14m) | 45cd | 1m | IP68, waterproof underwater to 2m/ dustproof |
| Medium | 30 | 13h 50min | 82ft (25m) | 155cd | | |
| High | 150 | 2h 35min | 190ft (58m) | 850cd | | |
| Turbo | 750 | 45min | 446ft (136m) | 4660cd | | |
| SIZE | Length: 2.4" (60mm) Diameter: 0.8" (20mm) Head: 0.8" (21mm) | | | | | |
| WEIGHT | 1.17 oz. (33.3g) excluding battery | | | | | |

NEW

E20 v2.0

350 LUMENS



- OPTIONAL ACCESSORIES**
- ◆ ALB-10 Bike Mount
 - ◆ AB02 Belt Clip
 - ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

- ◆ Max 350 lumen output from two AA batteries
- ◆ Four brightness levels
- ◆ Tactical tail switch operates on/off and brightness levels
- ◆ Hand and compact for everyday carry



| ANSI/FSC | Low | Med | High | Turbo |
|--------------------------|--|-------------|-------------|--------------|
| OUTPUT LUMENS | 5 | 30 | 150 | 350 |
| RUNTIME | 200h | 93h 35min | 11h 15min | 3h 45min |
| DISTANCE | 49ft (15m) | 105ft (32m) | 230ft (70m) | 394ft (120m) |
| INTENSITY | - | - | - | - |
| IMPACT RESISTANCE | 1m | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | |
| SIZE | Length: 5.0" (127mm) Body: 0.7" (16.8mm) Head: 0.8" (21mm) | | | |
| WEIGHT | 1.5 oz. (42g) excluding batteries | | | |


E30R

1600 LUMENS



- OPTIONAL ACCESSORIES**
- ◆ AOFs+ Filter Adapter
 - ◆ AOD-S Diffuser Tip
 - ◆ AOT-S Traffic Wand
 - ◆ ALB-10 Bike Mount
 - ◆ AB02 Belt Clip
 - ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

- ◆ Max 1600 lumen output from one 18650 rechargeable Li-ion battery (included)
- ◆ Six modes including five brightness levels and strobe
- ◆ Metal side switch for all functions
- ◆ Magnetic charging with battery level indicator



| ANSI/FSC | Eco | Low | Medium | High | Turbo | Strobe |
|--------------------------|---|-------------|-------------|--------------|--------------|--------|
| OUTPUT LUMENS | 30 | 150 | 350 | 800 | 1600 | 1600 |
| RUNTIME | 70h 30min | 17h 32min | 5h 28min | 1h 55min | 1h 27min* | - |
| DISTANCE | 89ft (27m) | 203ft (62m) | 305ft (93m) | 492ft (150m) | 666ft (203m) | - |
| INTENSITY | 192cd | 950cd | 2151cd | 5798cd | 10302cd | - |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | | |
| SIZE | Length: 3.9" (99mm) Body: 0.8" (21.5mm) Head: 1.0" (25.4mm) | | | | | |
| WEIGHT | 1.8 oz. (51g) excluding batteries | | | | | |

NEW

HT18

LONG DISTANCE HUNTING FLASHLIGHT

Throws **1500** lumens
a distance of **3,035ft** (925m)
OVER HALF OF A MILE!

- ◆ Max 1500 lumen output from one 21700 (included) or one 18650 rechargeable li-ion battery
- ◆ Five lighting modes including four brightness levels and strobe
- ◆ Tactical tail switch and mode selecting side switch
- ◆ Extremely long beam distance
- ◆ Red and green filters included

OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ ALF-18 Battery Holder
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery
- ◆ ARB-L21 Battery
- ◆ ARB-L21 USB Battery

| ANSI/FSC | Low | Medium | High | Turbo | |
|-------------------|--|--------------|--------------|---------------|---------------|
| OUTPUT LUMENS | 21700 | 30 | 150 | 500 | 1500 |
| | 18650 | 30 | 150 | 500 | 1100 |
| RUNTIME | 21700 | 61h | 20h 15min | 4h 15min | 1h 40min* |
| | 18650 | 53h | 14h 10min | 2h 50min | 1h 40min* |
| DISTANCE | 21700 | 525ft (160m) | 984ft (300m) | 1870ft (570m) | 3035ft (925m) |
| | 18650 | 525ft (160m) | 984ft (300m) | 1870ft (570m) | 2641ft (805m) |
| INTENSITY | 21700 | 6379cd | 21567cd | 80877cd | 213187cd |
| | 18650 | 6379cd | 21567cd | 80877cd | 162682cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 7.2" (184mm) Body: 1.0" (26mm) Head: 2.7" (68mm) | | | | |
| WEIGHT | 7.8 oz (220g) excluding battery | | | | |



LD02 v2.0

70 LUMENS



- ◆ Max 70 lumen output from one AAA battery
- ◆ Four modes including three brightness levels plus a UV light
- ◆ Tail switch for one-handed activation and output selection
- ◆ Made of durable high-strength and oxidation-resistant aluminum and stainless steel



OPTIONAL ACCESSORIES
◆ None

| ANSI/FSC | UV Light | Low | Medium | High | |
|--------------------------|---|-----------|------------|-------------|--------|
| OUTPUT LUMENS | 200mW | 1 | 25 | 70 | |
| RUNTIME | Alkaline | 4h | 75h | 2h 40min | 40min* |
| | Ni-MH | 3h | 45h | 2h 55min | 45min* |
| DISTANCE | - | 20ft (6m) | 89ft (27m) | 157ft (48m) | |
| INTENSITY | - | 10cd | 185cd | 580cd | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 3.6" (92mm) Diameter: 0.5" (13.5mm) | | | | |
| WEIGHT | 0.8 oz. (24g) excluding battery | | | | |

LD05 v2.0

100 LUMENS



- ◆ Max 100 lumen output from two AAA batteries
- ◆ Four modes including three brightness levels plus a UV light
- ◆ Tail switch for one-handed activation and output selection
- ◆ Made of durable high-strength and oxidation-resistance aluminum and stainless steel



OPTIONAL ACCESSORIES
◆ None

| ANSI/FSC | UV Light | Low | Medium | High | |
|--------------------------|--|------------|-------------|-------------|-----------|
| OUTPUT LUMENS | 200mW | 5 | 25 | 100 | |
| RUNTIME | Alkaline | 9h | 70h | 7h 50min | 1h 40min* |
| | Ni-MH | 7h | 36h | 6h 40min | 2h 10min* |
| DISTANCE | - | 72ft (22m) | 112ft (34m) | 177ft (54m) | |
| INTENSITY | - | 120cd | 290cd | 730cd | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 5.3" (135mm) Diameter: 0.5" (13.5mm) | | | | |
| WEIGHT | 1.0 oz. (29.7g) excluding batteries | | | | |

LD12

320 LUMENS



- ◆ Max 320 lumen output from a 14500 rechargeable battery, 150 lumens from an alkaline AA battery (included)
- ◆ Five modes including four brightness levels and strobe
- ◆ On-barrel switching and clip option for easy handling



OPTIONAL ACCESSORIES

- ◆ AOF5 Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ ALB-10 Bike Mount
- ◆ AB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L14 Battery
- ◆ ARB-L14 USB Battery


| ANSI/FSC | Low | Medium | High | Turbo | |
|--------------------------|--|--------|----------|----------|-------|
| OUTPUT LUMENS | Alkaline | 5 | 30 | 70 | 150 |
| | Ni-MH | 5 | 30 | 70 | 320 |
| RUNTIME | Alkaline | 40h | 9h 40min | 3h | 50min |
| | Ni-MH | 50h | 11h | 3h 30min | 1h |
| MAX DISTANCE | 443ft (135m) | | | | |
| MAX INTENSITY | 4500cd | | | | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 4.0" (102.5mm) Diameter: 0.8" (20.5mm) | | | | |
| WEIGHT | 1.98 oz. (56g) excluding battery | | | | |

LD15R

500 LUMENS



MAGNETIC TAIL
Put light where you need it



- ◆ Max 500 lumen output from one 16340 rechargeable Li-ion battery (included) or a CR123A lithium battery
- ◆ Seven modes including four brightness levels, SOS, red light, and red flashing
- ◆ Micro-USB rechargeable with battery level indicator
- ◆ Two-way body clip and magnetic tail

OPTIONAL ACCESSORIES

- ◆ ARB-L16 Battery

| ANSI/FSC | Low | Med | High | Turbo | Red Light |
|--------------------------|--|------------|-------------|-------------|-----------|
| OUTPUT LUMENS | 3 | 30 | 150 | 500 | 4 |
| RUNTIME | 110h | 13h 20min | 2h 50min | 1h 20min* | 30h |
| DISTANCE | 20ft (6m) | 75ft (23m) | 151ft (46m) | 279ft (85m) | 16ft (5m) |
| INTENSITY | 9cd | 135cd | 530cd | 1800cd | 6cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater 2m, dustproof | | | | |
| SIZE | Length: 2.8" (70mm) Diameter: 0.75" (19mm) | | | | |
| WEIGHT | 1.4 oz. (40g) weight excluding battery | | | | |

LD22

300 LUMENS



OPTIONAL ACCESSORIES

- ◆ AOFs Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ ALB-10 Bike Mount
- ◆ ALP-MT Holster

- ◆ Max 300 lumen output from two AA batteries
- ◆ Six modes including four brightness levels, strobe, and SOS
- ◆ A dedicated Tactical Mode activated by the rear-switch only for fast, simplified mode selection of turbo, low and strobe



| ANSI/FSC | | Low | Medium | High | Turbo |
|--------------------------|--|------|-----------|----------|----------|
| OUTPUT LUMENS | Outdoor | 5 | 30 | 100 | 300 |
| | Tactical | - | 30 | - | 300 |
| RUNTIME | Ni-MH | 100h | 25h 5min | 7h 10min | 1h 25min |
| | Alkaline | 90h | 22h 30min | 5h 5min | 40min |
| MAX DISTANCE | 394ft (120m) | | | | |
| MAX INTENSITY | 3600cd | | | | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IPX-8, waterproof underwater to 2m | | | | |
| SIZE | Length: 6.1" (155mm) Diameter: 0.8" (21.5mm) | | | | |
| WEIGHT | 2.5 oz (72g) excluding battery | | | | |

NEW

LD30

1600 LUMENS



- ◆ Max 1600 lumen output from one 18650 li-ion battery or two CR123A lithium batteries in an emergency
- ◆ Seven lighting modes including five brightness levels, strobe and SOS
- ◆ Tactical tail switch and mode selecting side switch
- ◆ Battery level indicator
- ◆ Two-position body clip

OPTIONAL ACCESSORIES

- ◆ AOFs+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ ALB-10 Bike Mount
- ◆ AB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery



| ANSI/FSC | Eco | Low | Med | High | Turbo |
|--------------------------|--|-------------|-------------|--------------|--------------|
| OUTPUT LUMENS | 30 | 150 | 350 | 800 | 1600 |
| RUNTIME | 70h 30min | 17h 30min | 5h 30min | 1h 55min | 1h 30min* |
| DISTANCE | 82ft (25m) | 197ft (60m) | 312ft (95m) | 492ft (150m) | 673ft (205m) |
| INTENSITY | 192cd | 950cd | 2151cd | 5798cd | 10302cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 4.3" (109mm) Body: 0.9" (21.5mm) Head: 1.0" (25.4mm) | | | | |
| WEIGHT | 2.1 oz. (59g) excluding battery | | | | |

NEW

LD42

1000 LUMENS



Rotary Switch
twist to switch
brightness levels

- ◆ Max 1000 lumen output from four AA batteries (included)
- ◆ Five brightness levels
- ◆ Patented mechanical rotary mode switch
- ◆ Flat body design for a more natural grip



OPTIONAL ACCESSORIES

- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand

| ANSI/FSC | Eco | Low | Med | High | Turbo |
|--------------------------|--|-------------|--------------|--------------|---------------|
| OUTPUT LUMENS | 5 | 50 | 150 | 350 | 1000 |
| RUNTIME | 130h 20min | 36h 40min | 13h 10min | 2h 38min | 1h 10min* |
| DISTANCE | 75ft (23m) | 236ft (72m) | 410ft (125m) | 623ft (190m) | 1148ft (350m) |
| INTENSITY | 132cd | 1296cd | 3906cd | 9025cd | 30625cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 6.3" (159.5mm) Body: 1.28" (32.5mm) Head: 1.34" (34mm) | | | | |
| WEIGHT | 3.5 oz. (100g) excluding batteries | | | | |

LR40R

12000 lumens
**OUR BRIGHTEST
FLASHLIGHT**



- ◆ Max 12000 lumen output from the included Li-ion battery pack; one to four 18650 batteries can be used in an emergency.
- ◆ Eleven modes including four spotlight levels, five floodlight modes, strobe, and SOS
- ◆ Fast USB Type-C charging and discharge
- ◆ Stainless steel side switches. Quickly choose spotlight/floodlight modes or both

OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery



| ANSI/FSC | | | | | | |
|------------|---|---------|-----------|---------------|-------------------|---|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| SPOTLIGHT | Low | 50 | 92h 18min | 535ft (163m) | 6608cd | 1m IP68, dustproof/waterproof underwater to 2m |
| | Med | 150 | 44h 31min | 863ft (263m) | 17239cd | |
| | High | 350 | 22h 30min | 1316ft (401m) | 40105cd | |
| | Turbo | 1000 | 7h | 2100ft (640m) | 101960cd | |
| FLOODLIGHT | Low | 350 | 22h 44min | 213ft (65m) | 915cd | |
| | Med | 1000 | 7h 15min | 377ft (115m) | 3142cd | |
| | High I | 3000 | 2h 50min | 656ft (200m) | 9830cd | |
| | High II | 6000 | 2h | 968ft (295m) | 21510cd | |
| | Turbo | 11000 | 45min | 1345ft (410m) | 41867cd | |
| | Strobe | 3000 | - | - | - | |
| | SOS | 350 | - | - | - | |
| SIZE | Length: 6.1" (154mm) Width: 3.2" (80mm) Height: 2.0" (51mm) | | | | | |
| WEIGHT | 17.6 oz. (500g) excluding batteries | | | | | |

**Independent
Spotlight and
Floodlight Switches**
with battery level indicator

PD25

550 LUMENS



- ◆ Max 550 lumen output from a 16340 rechargeable battery or 400 lumens from a CR123A
- ◆ Five modes including four brightness levels and strobe
- ◆ Intelligent drive circuit for higher battery performance
- ◆ Optimum output-to-weight ratios



OPTIONAL ACCESSORIES

- ◆ AOFs Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ ALB-10 Bike Mount
- ◆ ARB-L16 Battery

| ANSI/FSC | Low | Medium | High | Turbo | |
|-------------------|--|--------|----------|----------|----------|
| OUTPUT LUMENS | CR123A | 5 | 50 | 150 | 400 |
| | 16340 | 5 | 50 | 150 | 550 |
| RUNTIME | CR123A | 100h | 9h 5min | 3h 15min | 1h 10min |
| | 16340 | 53h | 7h 10min | 2h 25min | 35min |
| MAX DISTANCE | 427ft (130m) | | | | |
| MAX INTENSITY | 4225cd | | | | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IPX-8, waterproof underwater to 2m | | | | |
| SIZE | Length: 3.7" (93mm) Width: 0.8" (21.5mm) | | | | |
| WEIGHT | 1.7 oz. (47g) weight excluding battery | | | | |

PD32

900 LUMENS



- ◆ Max 900 lumen output from one 18650 Li-ion battery or two CR123A batteries
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Tactical tail switch operates on/off and momentary on function
- ◆ Side switch operates the modes



OPTIONAL ACCESSORIES

- ◆ AOFs+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ AER-02 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ ALB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | Low | Medium | Medium | High | Turbo |
|-------------------|--|----------|-----------|------|----------|
| OUTPUT LUMENS | 5 | 50 | 150 | 400 | 900 |
| RUNTIME | 260h | 37h 5min | 10h 25min | 4h | 1h 55min |
| MAX DISTANCE | 787ft (240m) | | | | |
| MAX INTENSITY | 14400cd | | | | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IPX-8, waterproof underwater to 2m | | | | |
| SIZE | Length: 5.1" (129.5mm) Diameter: 0.9" (22.6mm) | | | | |
| WEIGHT | 2.7 oz. (77g) excluding battery | | | | |

PD35 v2.0

1000 LUMENS



- ◆ Max 1000 lumen output from one rechargeable 18650 Li-ion battery or two CR123A batteries (not included)
- ◆ Six modes including five brightness levels and strobe
- ◆ Boot-up battery level indicator and low-voltage warning
- ◆ Metal side switch for output selection



OPTIONAL ACCESSORIES

- ◆ AOFs+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ AER-02 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ ALB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | Eco | Low | Medium | High | Turbo |
|-------------------|--|-------------|--------------|--------------|--------------|
| OUTPUT LUMENS | 3 | 50 | 150 | 350 | 1000 |
| RUNTIME | 430h | 29h 30min | 12h 25min | 5h 10min | 2h 50min* |
| DISTANCE | 43ft (13m) | 197ft (60m) | 338ft (103m) | 515ft (157m) | 820ft (250m) |
| INTENSITY | 42cd | 900cd | 2650cd | 6250cd | 15600cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 5.4" (138mm) Body: 0.9" (23mm) Head: 1.0" (25.4mm) | | | | |
| WEIGHT | 3.1 oz. (88g) weight excluding batteries | | | | |

PD35 TAC

1000 LUMENS



OPTIONAL ACCESSORIES

- ◆ AOF5+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ AER-02 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ ALB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ 1000 lumen output from two CR123A batteries or one 18650 Li-ion battery
- ◆ Six modes including five brightness levels and strobe
- ◆ A specific Tactical Mode activated by the rear-switch only for fast, simplified mode selection of turbo, low and strobe



| ANSI/FSC | Eco | Low | Medium | High | Turbo |
|-------------------|--|-----------|----------|----------|----------|
| OUTPUT LUMENS | 8 | 60 | 200 | 500 | 1000 |
| RUNTIME | 140h | 29h 15min | 8h 30min | 2h 55min | 1h 10min |
| MAX DISTANCE | 656ft (200m) | | | | |
| MAX INTENSITY | 10000cd | | | | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IPX-8, waterproof underwater to 2m | | | | |
| SIZE | Length: 5.4" (137mm) Diameter: 1" (25.4mm) | | | | |
| WEIGHT | 3.1 oz. (88g) weight excluding batteries | | | | |

NEW

PD40R v2.0

3000 LUMENS



OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ AB02 Belt Clip
- ◆ ALC-01 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L21 Battery
- ◆ ARB-L21 USB Battery



- ◆ Max 3000 lumen output from one high-capacity 21700 rechargeable Li-ion battery (included)
- ◆ Five modes including four brightness levels and strobe
- ◆ Battery level indicator and low-voltage warning
- ◆ Patented rotary switch allows you to quickly select a brightness level with a simple twist

| ANSI/FSC | Low | Medium | High | Turbo | Strobe |
|-------------------|--|--------------|--------------|---------------|--------|
| OUTPUT LUMENS | 30 | 350 | 1000 | 3000 | 3000 |
| RUNTIME | 79h 30min | 7h 10min | 3h | 2h | – |
| DISTANCE | 141ft (43m) | 482ft (147m) | 814ft (248m) | 1411ft (430m) | – |
| INTENSITY | – | – | – | – | – |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 5.4" (138mm) Body: 1.0" (26mm) Head: 1.3" (33.2mm) | | | | |
| WEIGHT | 4.1 oz. (117g) weight excluding battery | | | | |

NEW

PD36R

RECHARGEABLE FLASHLIGHT



- ◆ Max 1600 lumen output from one high-capacity 21700 rechargeable Li-ion battery (included) or one 18650 rechargeable li-ion battery with the ALF-18 battery holder (not included)
- ◆ Six modes including five brightness levels and strobe
- ◆ Fast USB Type-C rechargeable with battery level indicator
- ◆ Tactical tail switch and mode selecting side switch



BATTERIES INCLUDED



BATTERY LEVEL INDICATOR



RECHARGEABLE



STROBE

| ANSI/FSC | MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF | SIZE | WEIGHT |
|----------|--------|---------------|-----------|--------------|-----------|-------------------|---|--|---------------------------------|
| | Eco | 30 | 115h | 115ft (35m) | 309cd | 1m | IP68, waterproof underwater to 2m/dustproof | Length: 5.4" (136mm) Body: 1.0" (25.4mm) Head: 1.0" (26.4mm) | 3.0 oz. (85g) excluding battery |
| | Low | 150 | 26h | 269ft (82m) | 1681cd | | | | |
| | Medium | 350 | 8h 24min | 420ft (128m) | 4101cd | | | | |
| | High | 800 | 5h 49min | 646ft (197m) | 9636cd | | | | |
| | Turbo | 1600 | 2h 50min* | 928ft (283m) | 19977cd | | | | |

OPTIONAL ACCESSORIES

- ◆ ALB-10 Bike Mount
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ AB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ALF-18 Battery Holder
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery
- ◆ ARB-L21 Battery
- ◆ ARB-L21 USB Battery

Maximum **1600** lumens

Powered by a **21700 LI-ION BATTERY** offering longer runtimes



USB Type-C Rechargeable

Less than 6" long



RC05SE

300 LUMENS



- OPTIONAL ACCESSORIES**
- ◆ AB02 Belt Clip
 - ◆ ARB-L14 Battery

- ◆ Max 300 lumen output from one 14500 rechargeable Li-ion battery
- ◆ Four brightness levels
- ◆ Magnetic Micro-USB rechargeable
- ◆ Two position body clip and magnetic bottom



| ANSI/FSC | | | | | | |
|---------------|--|----------|-------------|-----------|-------------------|---|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATERPROOF |
| Low | 5 | 40h | 36ft (11m) | 30cd | 1m | IP68, waterproof underwater to 2m/dustproof |
| Medium | 50 | 6h | 121ft (37m) | 340cd | | |
| High | 150 | 2h | 207ft (63m) | 990cd | | |
| Turbo | 300 | 1h 45min | 295ft (90m) | 2000cd | | |
| SIZE | Length: 4.0" (102mm) Diameter: 0.7" (19mm) | | | | | |
| WEIGHT | 1.3 oz. (36.8g) excluding battery and charging cable | | | | | |

RC20

1000 LUMENS



- ◆ Max 1000 lumen output from built-in Li-ion battery
- ◆ Five modes including four brightness levels and strobe
- ◆ Included USB charging cradle and battery level indicator
- ◆ One-handed operation by dual tail switch



- OPTIONAL ACCESSORIES**
- ◆ AOFI Filter Adapter
 - ◆ AOD-M Diffuser Tip
 - ◆ AOT-L Traffic Wand
 - ◆ ALG-00 Rail Mount
 - ◆ ALG-01 Rail Mount
 - ◆ ALB-10 Bike Mount


| ANSI/FSC | | | | | | |
|---------------|---|----------|--------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 10 | 120h | 951ft (290m) | 21100cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 150 | 9h 50min | | | | |
| High | 425 | 2h 55min | | | | |
| Turbo | 1000 | 1h 10min | | | | |
| SIZE | Length: 6.3" (161mm) Width: 1" (25.4mm) Head: 1.6" (40mm) | | | | | |
| WEIGHT | 7.2 oz. (205g) including batteries | | | | | |

RC40

6000 LUMENS



- ◆ Max 6000 lumen output from built-in rechargeable pack
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ AC adapter and DC car charger supportable
- ◆ Intelligent memory circuit and lock-out function



- OPTIONAL ACCESSORIES**
- ◆ ARB-L3 Battery Pack

| ANSI/FSC | | | | | | |
|---------------|--|-----------|---------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Eco | 45 | 125h | 2395ft (730m) | 133200cd | 1m | IPX-8, waterproof underwater to 2m |
| Low | 500 | 18h 15min | | | | |
| Medium | 2000 | 4h 15min | | | | |
| High | 4000 | 1h 50min | | | | |
| Turbo | 6000 | 1h* | | | | |
| SIZE | Length: 10.7" (272mm) Head: 4.6" (108mm) Diameter: 2.1" (52mm) | | | | | |
| WEIGHT | 43.5 oz. (1234g) weight including battery | | | | | |

SD11

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion batteries or two CR123A Lithium batteries
- ◆ Three modes including two brightness levels and a red light
- ◆ Rotating magnetic ring for one-hand control
- ◆ Double-layer body tube guards against corrosion



OPTIONAL ACCESSORIES

- ◆ AOFM Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-M Traffic Wand
- ◆ ALG-00 Rail Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | Low | High | Red |
|--------------------------|--|-------------|------------|
| OUTPUT LUMENS | 500 | 1000 | 250 |
| RUNTIME | 3h 40min | 2h | 3h |
| DISTANCE | 98ft (30m) | 148ft (45m) | 75ft (23m) |
| INTENSITY | 225cd | 505cd | 132cd |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IPX-8, waterproof underwater to 100m | | |
| SIZE | Length: 5.4" (138mm) Diameter: 1.0" (26mm) Head: 1.3" (34mm) | | |
| WEIGHT | 4.7 oz. (132.5g) excluding batteries | | |

SD20

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion batteries or two CR123A Lithium batteries
- ◆ Three modes including two brightness levels and a red light
- ◆ Rotating magnetic ring for one-hand control
- ◆ Double-layer body tube guards against corrosion



OPTIONAL ACCESSORIES

- ◆ AOFL Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-L Traffic Wand
- ◆ AOT-02 Traffic Wand
- ◆ ALG-00 Rail Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | Low | High | Red |
|--------------------------|--|--------------|-------------|
| OUTPUT LUMENS | 400 | 1000 | 105 |
| RUNTIME | 7h 30min | 3h | 8h |
| DISTANCE | 354ft (108m) | 564ft (172m) | 240ft (73m) |
| INTENSITY | 2900cd | 7400cd | 1300cd |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IPX-8, waterproof underwater to 100m | | |
| SIZE | Length: 8.2" (208mm) Diameter: 1.0" (26mm) Head: 1.6" (40mm) | | |
| WEIGHT | 8.6 oz. (245g) excluding batteries | | |

TK15UE

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Five modes including four brightness levels and strobe
- ◆ Tactical tail switch for momentary-on function

| OPTIONAL ACCESSORIES | |
|------------------------|-----------------------|
| ◆ AOFM Filter Adapter | ◆ ALG-01 Rail Mount |
| ◆ AOD-M Diffuser Tip | ◆ ALB-10 Bike Mount |
| ◆ AOT-M Traffic Wand | ◆ ALC-01 Belt Clip |
| ◆ AER-01 Remote Switch | ◆ ALP-MT Holster |
| ◆ AER-02 Remote Switch | ◆ ARB-L18 Battery |
| ◆ ALG-00 Rail Mount | ◆ ARB-L18 USB Battery |

| ANSI/FSC | | | | | | |
|---------------|--|-----------|---------------|-----------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 10 | 135h | 102ft (31m) | 240cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 150 | 11h 30min | 410ft (125m) | 3900cd | | |
| High | 350 | 4h 20min | 636ft (194m) | 9400cd | | |
| Turbo | 1000 | 2h | 1066ft (325m) | 26400cd | | |
| SIZE | Length: 5.6" (142.5mm) Body: 1.0" (25.4mm) Head: 1.3" (34mm) | | | | | |
| WEIGHT | 5.0 oz. (141g) excluding batteries | | | | | |

TK16

1000 LUMENS



- ◆ 1000 lumen output from one 18650 Li-ion battery or two CR123A Lithium batteries (batteries not included)
- ◆ Five modes including four brightness levels and strobe
- ◆ Dual tactical tail switch
- ◆ High intensity and long-range distance

| OPTIONAL ACCESSORIES | |
|------------------------|-----------------------|
| ◆ AOFM Filter Adapter | ◆ ALB-10 Bike Mount |
| ◆ AOD-M Diffuser Tip | ◆ ALC-01 Belt Clip |
| ◆ AOT-M Traffic Wand | ◆ ALP-MT Holster |
| ◆ AER-03 Remote Switch | ◆ ARB-L18 Battery |
| ◆ ALG-00 Rail Mount | ◆ ARB-L18 USB Battery |
| ◆ ALG-01 Rail Mount | |

| ANSI/FSC | | | | | | |
|---------------|---|----------|--------------|---------------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 10 | 150h | 787ft (240m) | 14480cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 150 | 10h | | | | |
| High | 400 | 3h 25min | | | | |
| Turbo | 1000 | 1h 10min | | | | |
| SIZE | Length: 5.5" (140mm) Body: 0.98" (25mm) Head: 1.3" (34mm) | | | | | |
| WEIGHT | 4.3 oz. (122g) excluding batteries | | | | | |

TK20R

1000 LUMENS



| OPTIONAL ACCESSORIES | |
|-----------------------|------------------------|
| ◆ AOFM Filter Adapter | ◆ AOD-M Diffuser Tip |
| ◆ AOT-M Traffic Wand | ◆ AER-03 Remote Switch |
| ◆ ALG-00 Rail Mount | ◆ ALG-01 Rail Mount |
| ◆ ALC-01 Belt Clip | ◆ ALP-MT Holster |
| ◆ ARB-L18 Battery | ◆ ARB-L18 USB Battery |



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery
- ◆ Five modes including four brightness levels and strobe
- ◆ Reliable dual-layer body design
- ◆ Tactical tail switch and side mode switch

| ANSI/FSC | | | | | | |
|---------------|--|-----------|---------------|-----------|-------------------|--|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 10 | 135h | 102ft (31m) | 240cd | 1m | IP68, waterproof underwater to 2m, dustproof |
| Medium | 150 | 10h 30min | 413ft (126m) | 3970cd | | |
| High | 350 | 4h | 633ft (193m) | 9310cd | | |
| Turbo | 1000 | 1h 40min* | 1017ft (310m) | 24000cd | | |
| SIZE | Length: 6.0" (151.5mm) Body: 1.0" (25mm) Head: 1.3" (34mm) | | | | | |
| WEIGHT | 5.0 oz (141g) excluding batteries | | | | | |

NEW

TK22 v2.0

1600 LUMENS




TK22UE

1600 LUMENS

NEW

- ◆ Max 1600 lumen output from one 21700 or 18650 rechargeable li-ion battery (not included)
- ◆ Five lighting modes including four brightness levels and strobe
- ◆ Tactical tail switch and mode selecting side switch
- ◆ Includes ALF-18 battery insert to allow for different battery types
- ◆ TK22UE has a stainless steel strike bezel with three tungsten steel glass breaking tips

| | | | |
|--|--|---|--|
|  UPGRADED |  BATTERIES INCLUDED |  BATTERY LEVEL INDICATOR |  STROBE |
| TK22 V2.0 ONLY | TK22UE ONLY | | |

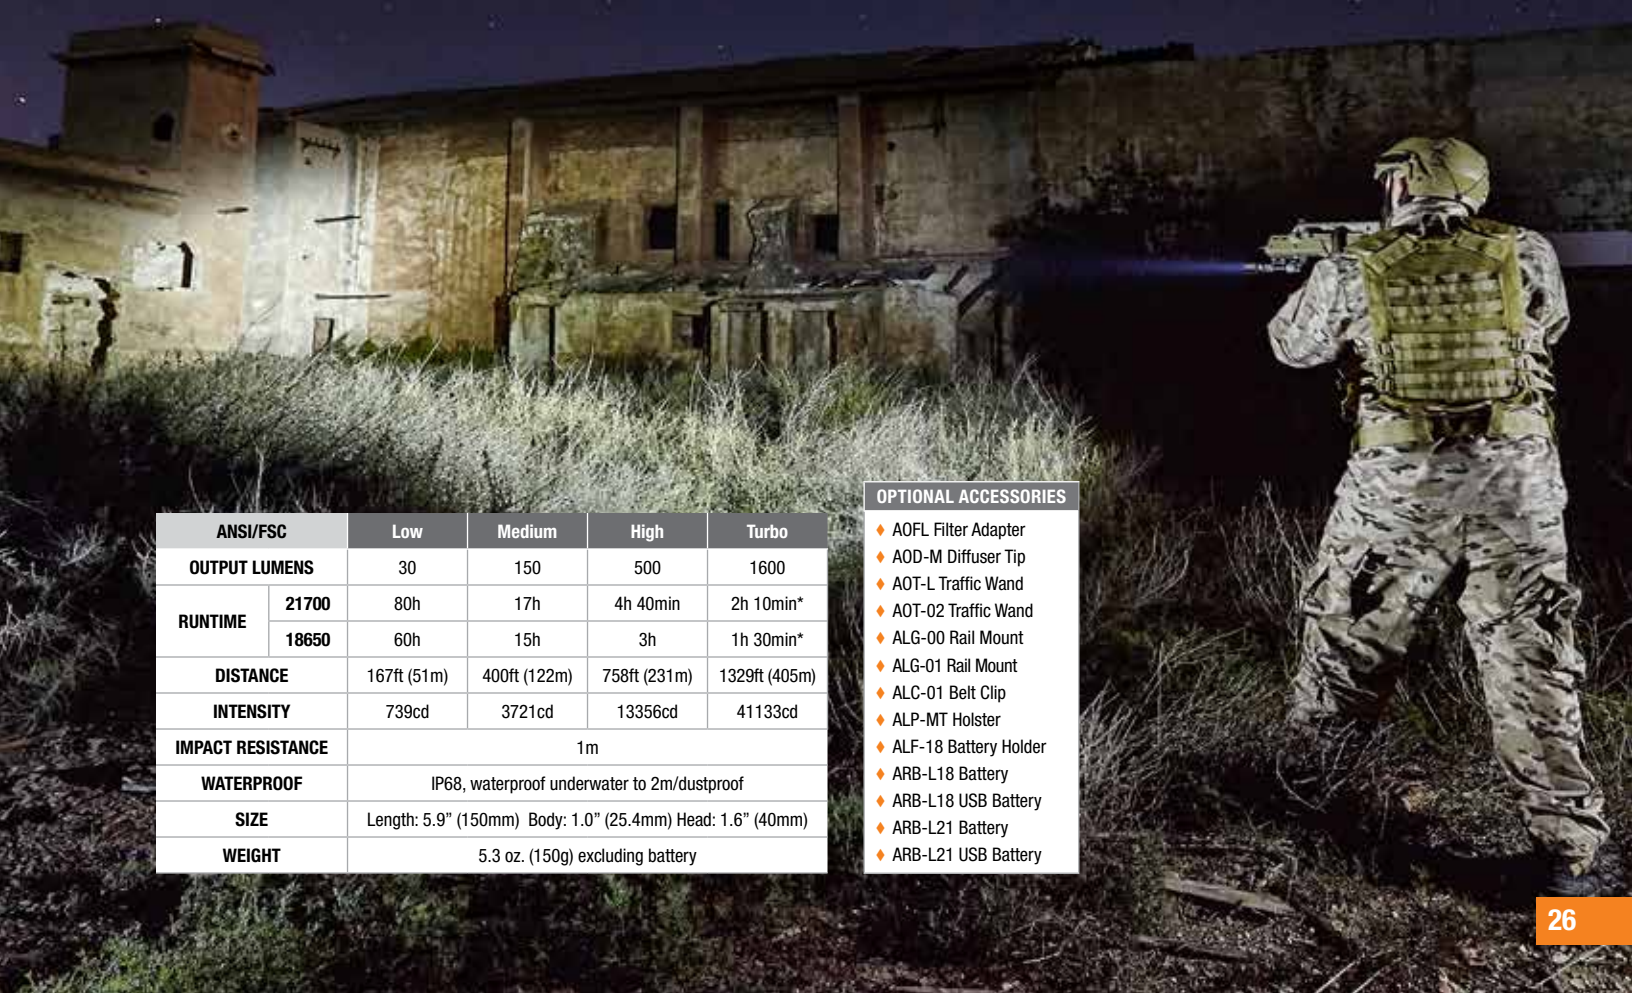

| ANSI/FSC | Low | Medium | High | Turbo | |
|--------------------------|--|--------------|--------------|---------------|-----------|
| OUTPUT LUMENS | 30 | 150 | 500 | 1600 | |
| RUNTIME | 21700 | 80h | 17h | 4h 40min | 2h 10min* |
| | 18650 | 60h | 15h | 3h | 1h 30min* |
| DISTANCE | 167ft (51m) | 400ft (122m) | 758ft (231m) | 1329ft (405m) | |
| INTENSITY | 739cd | 3721cd | 13356cd | 41133cd | |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | | | |
| SIZE | Length: 5.9" (150mm) Body: 1.0" (25.4mm) Head: 1.6" (40mm) | | | | |
| WEIGHT | 5.3 oz. (150g) excluding battery | | | | |

OPTIONAL ACCESSORIES

- ◆ AOFL Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-L Traffic Wand
- ◆ AOT-02 Traffic Wand
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALC-01 Belt Clip
- ◆ ALP-MT Holster
- ◆ ALF-18 Battery Holder
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery
- ◆ ARB-L21 Battery
- ◆ ARB-L21 USB Battery

TK25 RED

1000 LUMENS



TK25 UV

1000 LUMENS



TK25 R&B

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Including four brightness levels plus color modes (depending on version)
- ◆ Patent pending light source switching structure
- ◆ Dual tail switch controls the tactical activation and output selection

TK25 R&B Version

| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|---------------|--|-----------|--------------|---------------|-------------------|---|
| Low | 15 | 110h | 82ft (25m) | 160cd | 1m | IP68, dustproof/waterproof underwater to 2m |
| Medium | 100 | 22h 20min | 247ft (75m) | 1400cd | | |
| High | 300 | 5h 20min | 407ft (124m) | 3840cd | | |
| Turbo | 1000 | 2h | 738ft (225m) | 12650cd | | |
| Red (Low) | 25 | 40h | 161ft (49m) | 600cd | | |
| Red (High) | 150 | 7h 30min | 433ft (132m) | 4350cd | | |
| Blue | 60 | 6h 40min | 135ft (41m) | 420cd | | |
| SIZE | Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.6" (40mm) | | | | | |
| WEIGHT | 5.5 oz. (156.5g) excluding battery and belt clip | | | | | |

TK25 RED Version

| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|---------------|--|-----------|--------------|---------------|-------------------|---|
| Low | 15 | 110h | 82ft (25m) | 160cd | 1m | IP68, dustproof/waterproof underwater to 2m |
| Medium | 100 | 22h 20min | 247ft (75m) | 1400cd | | |
| High | 300 | 5h 20min | 407ft (124m) | 3840cd | | |
| Turbo | 1000 | 2h | 738ft (225m) | 12650cd | | |
| Red (Low) | 10 | 100h | 105ft (32m) | 250cd | | |
| Red (Med) | 100 | 9h 20min | 344ft (105m) | 2790cd | | |
| Red (High) | 310 | 2h 35min | 656ft (200m) | 10000cd | | |
| SIZE | Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.6" (40mm) | | | | | |
| WEIGHT | 5.5 oz. (156.5g) excluding battery and belt clip | | | | | |



OPTIONAL ACCESSORIES

- ◆ AOFI Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-L Traffic Wand
- ◆ AOT-02 Traffic Wand
- ◆ AER-03 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALC-01 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

BOTH TK25 R&B AND TK25 RED

TK25 R&B ONLY

TK25 UV ONLY

TK25 UV Version

| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | MAX INTENSITY | IMPACT RESISTANCE | WATER PROOF | | |
|---------------|--|-----------|--------------|---------------|-------------------|---|--|--|
| Low | 15 | 110h | 82ft (25m) | 160cd | 1m | IP68, dustproof/waterproof underwater to 2m | | |
| Medium | 100 | 22h 20min | 247ft (75m) | 1400cd | | | | |
| High | 300 | 5h 20min | 407ft (124m) | 3840cd | | | | |
| Turbo | 1000 | 2h | 738ft (225m) | 12650cd | | | | |
| UV | 3000mW | 6h 25min | - | - | | | | |
| SIZE | Length: 5.6" (142.6mm) Diameter: 1.0" (25.4mm) Head: 1.6" (40mm) | | | | | | | |
| WEIGHT | 5.5 oz. (156.5g) excluding battery and belt clip | | | | | | | |

NEW

TK26R

1500 LUMENS









- ◆ Max 1500 lumen output from an included 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Seven modes including four white levels, strobe, red light, and green light
- ◆ USB Type-C rechargeable with battery level indicator
- ◆ Tactical tail switch, color switch, and side mode switch
- ◆ Limited Lifetime Guarantee from Fenix Lighting USA



| ANSI/FSC | Low | Med | High | Turbo | Red | Green |
|--------------------------|---|--------------|--------------|---------------|------------|-------------|
| OUTPUT LUMENS | 10 | 150 | 350 | 1500 | 150 | 200 |
| RUNTIME | 100h | 10h 50min | 4h 40min | 1h 25min* | 4h 20min | 5h 10min |
| DISTANCE | 98ft (30m) | 361ft (110m) | 558ft (170m) | 1148ft (350m) | 98ft (30m) | 131ft (40m) |
| INTENSITY | 213cd | 3102cd | 7112cd | 30150cd | 218cd | 452cd |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IP68, dustproof/waterproof underwater to 2m | | | | | |
| SIZE | Length: 5.9" (150mm) Width: 1.6" (40mm) Height: 1.0" (25.4mm) | | | | | |
| WEIGHT | 5.5 oz. (157g) excluding battery | | | | | |

OPTIONAL ACCESSORIES

- ◆ AOFL Filter Adapter
- ◆ AOD-M Diffuser Tip
- ◆ AOT-L Traffic Wand
- ◆ AOT-02 Traffic Wand
- ◆ AER-03 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALC-01 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| | |
|---|--|
|  BATTERIES INCLUDED |  BATTERY LEVEL INDICATOR |
|  RED LED |  RECHARGEABLE |
|  GREEN LED |  STROBE |

NEW

TK30

WHITE LASER FLASHLIGHT



OPTIONAL ACCESSORIES

- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ ALP-MT Holster
- ◆ ALF-18 Battery Holder
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery
- ◆ ARB-L21 Battery
- ◆ ARB-L21 USB Battery

| ANSI/FSC | Low | High | Strobe |
|--------------------------|--|----------------|--------|
| OUTPUT LUMENS | 100 | 500 | 500 |
| RUNTIME | 6h | 3h | – |
| DISTANCE | 1969ft (600m) | 3937ft (1200m) | – |
| INTENSITY | – | – | – |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dust proof | | |
| SIZE | Length: 6.2" (158mm) Head: 1.3" (32mm) Body: 1.0" (26mm) | | |
| WEIGHT | 5.2 oz. (146g) weight excluding battery | | |

- ◆ Max 500 lumen output from one rechargeable 21700 li-ion battery (included) or one 18650 li-ion battery
- ◆ Three modes including two brightness levels and strobe
- ◆ Diffused white laser light creates a beam that can reach up to 1312 yards—almost 3/4 of a mile
- ◆ Tactical tail switch and side mode switch



TK32

1000 LUMENS



OPTIONAL ACCESSORIES

- ◆ AER-03 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Eight modes including four brightness levels, two red modes, and two green modes
- ◆ Dual tail switch controls the tactical activation and output selection
- ◆ Compatible with AER-03 remote pressure switch



| ANSI/FSC | | | | | | |
|---------------------|--|-----------|---------------|-----------|-------------------|------------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 8 | 170h | 131ft (40m) | 400cd | 1m | IPX-8, waterproof underwater to 2m |
| Medium | 100 | 15h 25min | 453ft (138m) | 4760cd | | |
| High | 350 | 4h 45min | 804ft (245m) | 15000cd | | |
| Turbo | 1000 | 1h 50min* | 1385ft (422m) | 44500cd | | |
| Red (Low) | 15 | 65h | 75ft (23m) | 135cd | | |
| Red (High) | 105 | 4h 15min | 213ft (65m) | 1050cd | | |
| Green (Low) | 30 | 40h | 148ft (45m) | 505cd | | |
| Green (High) | 165 | 5h 30min | 344ft (105m) | 2760cd | | |
| SIZE | Length: 6.3" (159mm) Body: 1" (25.4mm) Head: 2" (52mm) | | | | | |
| WEIGHT | 6.2 oz. (175g) excluding batteries | | | | | |

TK35

1300 LUMENS



- ◆ Max 1300 lumen output from four CR123A or two 18650 batteries
- ◆ Seven modes including five brightness levels, strobe, and SOS
- ◆ Micro USB rechargeable battery holder with battery level indicator



- OPTIONAL ACCESSORIES**
- ◆ AOT-01 Traffic Wand
 - ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

| ANSI/FSC | | | | | | |
|---------------|--|-----------|---------------|-----------|-------------------|--|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Eco | 10 | 235h | 128ft (39m) | 380cd | 1m | IP68, waterproof underwater to 2m, dustproof |
| Low | 50 | 68h 15min | 318ft (97m) | 2360cd | | |
| Medium | 150 | 21h 30min | 528ft (161m) | 6480cd | | |
| High | 500 | 5h 45min | 965ft (294m) | 21600cd | | |
| Turbo | 1300 | 3h 10min | 1575ft (480m) | 57600cd | | |
| SIZE | Length: 6.3" (159.5mm) Body: 1.7" (43mm) Head: 1.9" (48mm) | | | | | |
| WEIGHT | 9.6 oz. (271g) weight excluding batteries | | | | | |

TK35UE

3200 LUMENS



- ◆ Max 3200 lumen output from two 18650 rechargeable Li-ion batteries (not included)
- ◆ Eight modes including six brightness levels, strobe, and SOS
- ◆ Dual tail switches with patented rotary mode switch
- ◆ Micro USB rechargeable battery holder with battery level indicator



- OPTIONAL ACCESSORIES**
- ◆ AOT-01 Traffic Wand
 - ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

| ANSI/FSC | | | | | | |
|---------------|--|-----------|--------------|-----------|-------------------|--|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Eco | 20 | 152h | 66ft (20m) | 100cd | 1m | IP68, waterproof underwater to 2m, dustproof |
| Low | 100 | 38h 40min | 180ft (55m) | 760cd | | |
| Medium | 350 | 10h 50min | 328ft (100m) | 2500cd | | |
| High | 1000 | 3h 40min | 554ft (169m) | 7140cd | | |
| Turbo I | 2000 | 2h | 764ft (233m) | 13600cd | | |
| Turbo II | 3200 | 1h 30min | 984ft (300m) | 22500cd | | |
| SIZE | Length: 6.5" (164.5mm) Body: 1.7" (43mm) Head: 1.9" (48mm) | | | | | |
| WEIGHT | 10.1 oz. (286g) weight excluding batteries | | | | | |

TK72R

9000 LUMENS




OPTIONAL ACCESSORIES

- ◆ None


| ANSI/FSC | Lowest | Highest | Strobe |
|--------------------------|--|--------------|--------|
| OUTPUT LUMENS | 100 | 9000 | 4000 |
| RUNTIME | 50h | 50min | – |
| DISTANCE | 102ft (31m) | 938ft (286m) | – |
| INTENSITY | 240cd | 20500cd | – |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dust proof | | |
| SIZE | Length: 6.1" (156mm) Head: 2.3" (59mm) Body: 2.0" (50mm) | | |
| WEIGHT | 14.5 oz. (412g) weight excluding batteries | | |

- ◆ Max 9000 lumen output from included 7.2V/7000mAh Li-ion battery pack
- ◆ Three modes including any brightness level between 100-9000 lumens and strobe
- ◆ OLED display shows brightness level, available runtime and remaining battery life



TK75

5100 LUMENS



OPTIONAL ACCESSORIES

- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

| ANSI/FSC | Eco | Low | Medium | High I | High II | Turbo |
|--------------------------|--|--------------|--------------|---------------|---------------|---------------|
| OUTPUT LUMENS | 50 | 150 | 450 | 1000 | 2000 | 5100 |
| RUNTIME | 95h | 46h | 17h 45min | 6h | 3h | 2h 15min |
| DISTANCE | 279ft (85m) | 482ft (147m) | 843ft (257m) | 1204ft (367m) | 1696ft (517m) | 2789ft (850m) |
| INTENSITY | 1800cd | 5400cd | 16500cd | 33600cd | 66800cd | 180600cd |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IP68, waterproof underwater to 2m, dustproof | | | | | |
| SIZE | Length: 7.4" (188mm) Body: 2.1" (53mm) Head: 3.4" (86mm) | | | | | |
| WEIGHT | 22.2 oz. (630g) excluding batteries | | | | | |

- ◆ Max 5100 lumen output from four 18650 rechargeable Li-ion batteries (not included)
- ◆ Eight modes including six brightness levels, strobe, and SOS
- ◆ Dual stainless steel mode switches
- ◆ Battery level indicator, quick lock-out function

UC30


1000 LUMENS



OPTIONAL ACCESSORIES

- ◆ AOF5+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ AB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ Max 1000 lumen output from 18650 rechargeable Li-ion battery or two CR123A Lithium batteries
- ◆ Six modes including five brightness levels and strobe
- ◆ Micro-USB rechargeable
- ◆ Stainless steel side switch with battery level indicator



ANSI/FSC

| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|--------|---|-----------|--------------|-----------|-------------------|---|
| Eco | 5 | 150h | 69ft (21m) | 110cd | 1m | IP68, waterproof underwater to 2m/dustproof |
| Low | 50 | 28h 25min | 190ft (58m) | 840cd | | |
| Medium | 150 | 8h 45min | 331ft (101m) | 2550cd | | |
| High | 350 | 3h 20min | 512ft (156m) | 6080cd | | |
| Turbo | 1000 | 1h 25min* | 830ft (253m) | 16000cd | | |
| SIZE | Length: 5.1" (130mm) Width: 1" (25.4mm) | | | | | |
| WEIGHT | 2.7 oz. (77g) excluding battery | | | | | |

UC35 v2.0


1000 LUMENS



OPTIONAL ACCESSORIES

- ◆ AOF5+ Filter Adapter
- ◆ AOD-S Diffuser Tip
- ◆ AOT-S Traffic Wand
- ◆ AER-03 Remote Switch
- ◆ ALG-00 Rail Mount
- ◆ ALG-01 Rail Mount
- ◆ ALB-10 Bike Mount
- ◆ AB02 Belt Clip
- ◆ ALP-MT Holster
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ Max 1000 lumen output from one rechargeable 18650 Li-ion battery (included) or two CR123A batteries
- ◆ Six modes including five brightness levels and strobe
- ◆ Cree XP-L HI V3 LED provides greater brightness, efficiency and throw
- ◆ Micro-USB rechargeable with battery level indicator



ANSI/FSC

| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
|-----------|--|-----------|--------------|-----------|-------------------|---|
| Moonlight | 1 | 800h | 33ft (10m) | 25cd | 1m | IP68, waterproof underwater to 2m/dustproof |
| Low | 50 | 28h 10min | 210ft (64m) | 1000cd | | |
| Medium | 150 | 10h 40min | 322ft (98m) | 2400cd | | |
| High | 350 | 4h 10min | 525ft (160m) | 6400cd | | |
| Turbo | 1000 | 2h 15min | 873ft (266m) | 17700cd | | |
| SIZE | Length: 5.5" (140mm) Body: 0.9" (23.5mm) Head: 1.0" (25.4mm) | | | | | |
| WEIGHT | 3.1 oz. (89g) weight excluding batteries | | | | | |

WF05E

85 LUMENS



| ANSI/FSC | Low | Medium | High |
|--------------------------|--|------------|-------------|
| OUTPUT LUMENS | 10 | 30 | 85 |
| RUNTIME | 80h | 35h | 11h 30min |
| DISTANCE | 59ft (18m) | 95ft (29m) | 177ft (54m) |
| INTENSITY | 77cd | 210cd | 724cd |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IP68, waterproof underwater to 2m/dustproof | | |
| SIZE | Length: 5.3" (134.5mm) Body: 0.6" (14.9mm) Head: 0.7" (19mm) | | |
| WEIGHT | 1.3 oz. (38g) excluding batteries | | |

OPTIONAL ACCESSORIES

◆ None



- ◆ Max 85 lumen output from two AAA batteries
- ◆ Three brightness levels
- ◆ Intrinsically safe for use in hazardous areas
- ◆ Mode of durable high-strength and oxidation-resistant aluminum

INTRINSICALLY SAFE FLASHLIGHTS

certified by IECEx, ATEX and CSA



NEW

WF11E

200 LUMENS



| ANSI/FSC | Low | Medium | High |
|--------------------------|--|--------------|--------------|
| OUTPUT LUMENS | 30 | 100 | 200 |
| RUNTIME | 70h | 29h 30min | 10h |
| DISTANCE | 266ft (81m) | 463ft (141m) | 607ft (185m) |
| INTENSITY | 1652cd | 4972cd | 8512cd |
| IMPACT RESISTANCE | 1m | | |
| WATERPROOF | IP67, dustproof/waterproof underwater to 1m | | |
| SIZE | Length: 6.6" (167.5mm) Body: 0.9" (24mm) Head: 1.9" (49mm) | | |
| WEIGHT | 5.6 oz. (160g) excluding batteries | | |

OPTIONAL ACCESSORIES

◆ None



- ◆ Max 200 lumen output from three AA batteries
- ◆ Three brightness levels
- ◆ Intrinsically safe for use in hazardous areas
- ◆ Magnetic tail and body clip



MAGNETIC TAIL & HANDLE

WT20R

400 LUMENS

- ◆ Max 400 lumen output from the included 2000 mAh rechargeable battery pack or two AA batteries (no high brightness level)
- ◆ Six modes including three spotlight levels and three floodlight levels
- ◆ Dual light sources; spotlight and floodlight
- ◆ 105° adjustable head and magnetic tail



**MAGNETIC
TAIL**

ADJUSTABLE HEAD
Put light where you need it



OPTIONAL ACCESSORIES

- ◆ None


| ANSI/FSC | Spotlight Mode | | | Floodlight Mode | | |
|--------------------------|--|----------------|-----------------|-----------------|----------------|----------------|
| | Low | Med | High | Low | Med | High |
| OUTPUT LUMENS | 50 | 150 | 400 | 50 | 150 | 400 |
| RUNTIME | 21h | 10h | 3h 30min | 21h | 10h | 3h 30min |
| DISTANCE | 138ft (42m) | 236ft (72m) | 384ft (117m) | 66ft (20m) | 115ft (35m) | 184ft (56m) |
| INTENSITY | 456cd | 1326cd | 3434cd | 104cd | 316cd | 784cd |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IP66, rain/splash proof / dustproof | | | | | |
| SIZE | Length: 4.6" (117.5mm) Head: 1.7" (43.2mm) Body: 1.1" (28.3mm) | | | | | |
| WEIGHT | 5.4 oz. (154g) including battery | | | | | |

LANTERNS



CL09

200 LUMENS



- ◆ Max 200 lumen output from one ARB-L16-700U rechargeable Li-ion battery or one CR123A battery
- ◆ Twist tail to choose from seven different modes
- ◆ Tri-color lighting source: white, red and green

OPTIONAL ACCESSORIES
◆ ARB-L16 Battery


| ANSI/FSC | | | | | |
|---------------|---|-----------|--------------|-------------------|---|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 1 | 90h | 33ft (10m) | 1m | IP68, waterproof underwater to 2m/dustproof |
| Medium | 30 | 19h 20min | | | |
| High | 80 | 5h 40min | | | |
| Turbo | 200 | 2h 40min | | | |
| Red | 5 | 30h | | | |
| Green | 5 | 48h | | | |
| SIZE | Length: 3.09" (78.5mm) Diameter: 0.86" (22mm) | | | | |
| WEIGHT | 1.11 oz (31.5g) excluding battery and other accessories | | | | |

CL20R

300 LUMENS



- ◆ Max 300 lumen output from the built-in 1600mAh Li-polymer battery
- ◆ Six lighting modes including four white light levels, red light, and red flashing
- ◆ Micro-USB rechargeable



| ANSI/FSC | | | | | |
|---------------|--|---------|--------------|-------------------|--------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 1 | 200h | 49ft (15m) | 1.5m | IP66, rain resistant/dustproof |
| Medium | 40 | 20h | | | |
| High | 130 | 12h | | | |
| Turbo | 300 | 6h | | | |
| Red | 1.5 | 100h | | | |
| SIZE | Length: 2.8" (72mm) Width: 1.6" (41.5mm) Height: 2.0" (50mm) | | | | |
| WEIGHT | 3.2 oz. (91g) including battery | | | | |

CL23

300 LUMENS



- ◆ Max 300 lumen output from up to three AA batteries
- ◆ Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- ◆ One switch control for easy and fast operation
- ◆ IP66 rated rain resistant and dustproof




| ANSI/FSC | | | | | |
|---------------|---|----------|--------------|-------------------|--------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 40 | 45h | 66ft (20m) | 1m | IP66, rain resistant/dustproof |
| Medium | 150 | 13h | | | |
| High | 300 | 7h 30min | | | |
| Front | 25 | 80h | | | |
| Down 1 | 2 | 350h | | | |
| Down 2 | 25 | 80h | | | |
| Red | 1 | 150h | | | |
| SIZE | Diameter: 2.2" (55mm) Height: 3.4" (85mm) | | | | |
| WEIGHT | 4.9 oz. (140g) excluding batteries | | | | |

CL26R

400 LUMENS



- ◆ Max 400 lumen output from one 18650 Li-ion battery or two CR123As
- ◆ Eight modes including 3 brightness levels, front light, 2 brightness levels of down light, red/red flashing mode
- ◆ Extremely durable case can withstand 1.2 tons of pressure
- ◆ IP66 rated rain resistant and dustproof



- OPTIONAL ACCESSORIES**
- ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

| ANSI/FSC | | | | | |
|----------|---|---------|--------------|-------------------|--------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 40 | 30h | 82ft (25m) | 1m | IP66, rain resistant/dustproof |
| Medium | 150 | 15h | | | |
| High | 400 | 5h | | | |
| Front | 25 | 58h | | | |
| Down 1 | 3 | 240h | | | |
| Down 2 | 25 | 58h | | | |
| Red | 1 | 200h | | | |
| SIZE | Diameter: 1.9" (49mm) Height: 3.8" (97mm) | | | | |
| WEIGHT | 4.1 oz. (116g) excluding batteries | | | | |

CL30R

650 LUMENS



- ◆ Max 650 lumen output from up to three 18650 rechargeable Li-ion batteries
- ◆ Six modes including 5 brightness levels and flashing mode
- ◆ USB rechargeable with low battery indicator
- ◆ Serves as a portable power bank to charge other devices



- OPTIONAL ACCESSORIES**
- ◆ ARB-L18 Battery
 - ◆ ARB-L18 USB Battery

| ANSI/FSC | Eco | Low | Med | High | Turbo | |
|-------------------|--|------|-----|------|-------|----------|
| OUTPUT LUMENS | 10 | 50 | 100 | 350 | 650 | |
| RUNTIME | 2600mAh | 300h | 70h | 38h | 9h | 4h 30min |
| | 3500mAh | 400h | 93h | 51h | 12h | 6h |
| MAX DISTANCE | 115ft (35m) | | | | | |
| IMPACT RESISTANCE | 1m | | | | | |
| WATERPROOF | IPX-7, waterproof underwater to 1m | | | | | |
| SIZE | Height: 5.4" (136mm) Diameter: 3.7" (93mm) | | | | | |
| WEIGHT | 14.5 oz. (412g) excluding battery | | | | | |

BIKE LIGHTS



BC05R

10 LUMENS



- ◆ Max 10 lumen output from built-in 240mAh Li-polymer battery
- ◆ Four modes including two brightness levels and two flashing modes
- ◆ Micro-USB rechargeable with battery level indicator
- ◆ Also use as a headlamp or backpack light

| | | | | | |
|--------------|--------------------|-------------------------|---------|----------|---------------------------------------|
| RECHARGEABLE | BATTERIES INCLUDED | BATTERY LEVEL INDICATOR | RED LED | FLASHING | OPTIONAL ACCESSORIES ◆ None |
|--------------|--------------------|-------------------------|---------|----------|---------------------------------------|

| ANSI/FSC | | | | | |
|---------------|--|----------|--------------|-------------------|-----------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | MAX DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 2 | 10h | 20ft (6m) | 1m | IP66, rain/splash proof/dustproof |
| High | 10 | 1h 48min | | | |
| Flash 1 | 2 | 40h | | | |
| Flash 2 | 2 | 72h | | | |
| SIZE | Length: 2" (51mm) Width: 0.87" (22mm) Height: 0.83" (21mm) | | | | |
| WEIGHT | 0.67 oz. (19g) including battery | | | | |

BC25R

600 LUMENS



- ◆ Max 600 lumen output from the built-in 2600mAh Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Cut-off facula line for safer commuting in traffic

| | | | | |
|--------------|--------------------|-------------------------|----------|---|
| RECHARGEABLE | BATTERIES INCLUDED | BATTERY LEVEL INDICATOR | FLASHING | OPTIONAL ACCESSORIES ◆ ALD-08 Helmet Clip |
|--------------|--------------------|-------------------------|----------|---|

| ANSI/FSC | Low | Medium | High | Turbo |
|--------------------------|--|-------------|-------------|--------------|
| OUTPUT LUMENS | 50 | 150 | 350 | 600 |
| RUNTIME | 36h | 15h | 7h | 2h* |
| DISTANCE | 105ft (32m) | 174ft (53m) | 259ft (79m) | 348ft (106m) |
| IMPACT RESISTANCE | 1m | | | |
| WATERPROOF | IP66 - rain resistant/dust proof | | | |
| SIZE | Length: 4.4" (113mm) Width: 1.25" (32mm) Height: 1.2" (31mm) | | | |
| WEIGHT | 5.5 oz. (155 grams) including mount and battery | | | |

NEW BC21R v2.0

1000 LUMENS



- ◆ Max 1000 lumen output from one 18650 rechargeable Li-ion battery or two CR123A batteries
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Type-C USB rechargeable with battery level indicator

| |
|-----------------------------|
| OPTIONAL ACCESSORIES |
| ◆ ALD-08 Helmet Clip |
| ◆ ARB-L18 Battery |
| ◆ ARB-L18 USB Battery |

| |
|-------------------------|
| RECHARGEABLE |
| BATTERIES INCLUDED |
| BATTERY LEVEL INDICATOR |
| FLASHING |

| ANSI/FSC | | | | | | |
|---------------|---|---------|--------------|-----------|-------------------|-----------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | INTENSITY | IMPACT RESISTANCE | WATER PROOF |
| Low | 50 | 30h | 98ft (30m) | 240cd | 1m | IP66, rain/splash proof/dustproof |
| Medium | 150 | 13h | 164ft (50m) | 700cd | | |
| High | 400 | 6h | 295ft (90m) | 2050cd | | |
| Turbo | 1000 | 2h* | 476ft (145m) | 5300cd | | |
| SIZE | Length: 4.6" (116mm) Width: 1.2" (31mm) Height: 1.2" (30mm) | | | | | |
| WEIGHT | 3.5oz. (100g) excluding battery | | | | | |

BC30R

1800 LUMENS



- ◆ Max 1800 lumen output from the built-in 5200mAh micro-USB rechargeable battery
- ◆ Dual Distance Beam System with OLED digital display
- ◆ Quick-Release bicycle mount
- ◆ Upgraded remote pressure switch for fast mode selection



OPTIONAL ACCESSORIES

- ◆ ALD-08 Helmet Clip

| ANSI/FSC | | | | | |
|---------------|---|-----------|--------------|-------------------|----------------------------------|
| MODE | OUTPUT LUMENS | RUNTIME | DISTANCE | IMPACT RESISTANCE | WATER PROOF |
| Low | 50 | 36h | 92ft (28m) | 1m | IP66 - rain resistant, dustproof |
| Medium | 150 | 16h 10min | 154ft (47m) | | |
| High | 400 | 7h 20min | 249ft (76m) | | |
| Turbo | 1000 | 2h 40min | 400ft (122m) | | |
| Burst | 1800 | - | 528ft (161m) | | |
| SIZE | Length: 4.5" (114mm) Width: 2.0" (50.5mm) Height: 1.3" (31.8mm) | | | | |
| WEIGHT | 7.8 oz. (221.6g) excluding handlebar mount | | | | |

BC35R

1800 LUMENS



OPTIONAL ACCESSORIES

- ◆ ALD-08 Helmet Clip
- ◆ ARB-L18 Battery
- ◆ ARB-L18 USB Battery

- ◆ Max 1800 lumen output from built-in 5200mAh Li-ion battery
- ◆ Five modes including four brightness levels and flashing mode
- ◆ Cut-off facula line for safer commuting in traffic
- ◆ Micro-USB rechargeable with battery level indicator

| ANSI/FSC | Low | Medium | High | Turbo | Burst |
|--------------------------|--|-------------|-------------|--------------|--------------|
| OUTPUT LUMENS | 45 | 150 | 400 | 1000 | 1800 |
| RUNTIME | 28h | 12h | 6h 30min | 2h 12min* | - |
| DISTANCE | 82ft (25m) | 148ft (45m) | 240ft (73m) | 390ft (119m) | 479ft (146m) |
| INTENSITY | 152cd | 503cd | 1332cd | 3542cd | 5367cd |
| IMPACT RESISTANCE | 1m | | | | |
| WATERPROOF | IP66, rain/splash proof / dust proof | | | | |
| SIZE | Length: 4.68" (119mm) Width: 1.97" (50mm) Height: 1.22" (31mm) | | | | |
| WEIGHT | 9.9 oz. (283g) including mount and battery | | | | |

BATTERIES & CHARGERS

SINGLE BAY CHARGERS



ARE-X1/ARE-D1

2-BAY CHARGERS



ARE-A2/ARE-D2

4-BAY CHARGERS



ARE-A4

Specifically designed for 18650 rechargeable batteries, these chargers feature a constant-current charge which safely extends the health and lifespan of the battery. Built for all types of batteries from 10440 up to 26650, AAA to AA. Automatically chooses the correct charging mode for each type of battery.

RECHARGEABLE BATTERIES

Fenix rechargeable batteries are designed for today's high-intensity flashlights. Featuring a large capacity, triple over-heat protection, built-in over-charge protection and other safety features, these batteries from Fenix are your best choice for powering your Fenix light.



| MODEL | TYPE | CAPACITY | VOLTAGE |
|---------------|---------------------|----------|---------|
| ARB-L14-800 | 14500 | 800 mAh | 3.6v |
| ARB-L14-1600U | 14500 with USB Port | 1600 mAh | 1.5v |
| ARB-L16-700 | 16340 | 700 mAh | 3.7v |
| ARB-L16-700U | 16340 with USB Port | 700 mAh | 3.6v |
| ARB-L18-2600 | 18650 | 2600 mAh | 3.6v |
| ARB-L18-2600U | 18650 with USB Port | 2600 mAh | 3.6v |
| ARB-L18-3400 | 18650 | 3400 mAh | 3.6v |
| ARB-L18-3500 | 18650 | 3500 mAh | 3.6v |
| ARB-L18-3500U | 18650 with USB Port | 3500 mAh | 3.6v |
| ARB-L21-5000 | 21700 | 5000 mAh | 3.6v |
| ARB-L21-5000U | 21700 with USB Port | 5000 mAh | 3.6v |
| ARB-L4-4800 | 26650 | 4800 mAh | 3.7v |

ACCESSORIES

BATTERY HOLDER



ALF-18

Allows you to use an 18650 battery in flashlights that are built to use a 21700 battery. Simply insert your 18650 battery into the holder and place both into your 21700 capable flashlight.

BELT CLIPS



AB02 / ALC-01

Turn belt, waistband, pack strap or hat into a hands-free flashlight holder. Built for smaller lights, this clip features durable materials and a click-to-lock rotating mechanism

BIKE MOUNT



ALB-10

Take Fenix flashlights on the road and trail with this fully-adjustable mount. Capable of holding small to mid-sized lights, this mount can be moved from bike to bike without using tools.

DIFFUSER TIPS



AOD

Transform your Fenix light into a reading, signal or emergency light. Attachment is quick and secure with materials designed for field use.

FILTER ADAPTERS



AOF

Improve night-time visibility and avoid detection with these colored filters. Durable with an anti-roll design, they improve map reading, navigation and tracking.

HEADBAND



HB01

Turn your small Fenix flashlight into a headlamp with this useful headband mount. Durable and comfortable to wear, it's made of moisture wicking cotton.

HEADBAND GEAR BAG



APB-20

Ultra-compact headlamp gear bag made of high-strength nylon cloth. Includes an inner mesh cloth bag large enough to carry extra batteries.

HELMET MOUNTS/CLIPS



ALD-02/ALG-03/ALD-08

Quickly attach and detach headlamps or flashlights to any outdoor or work helmet—making sure the light stays securely fixed to your helmet.

HOLSTERS



ALP-MT

Practical small pouch for flashlights, knives and multi tools. Wide compatibility with adjustable lid. Secured by the strap with snap fastener or detachable bungee cord.

LANYARDS



ALL-01

Soft and comfortable, this flashlight lanyard is fully adjustable, can hold up to 46 pounds and is a great addition for your large fenix flashlight.

RAIL MOUNTS



ALG-00 / ALG-01

Mount your flashlight to a Picatinny/Weaver rail with this anodized aluminum mount. Steel hex screws ensure positive engagement with a matte black finish for a professional appearance.

REMOTE SWITCHES



AER-02-V2 / AER-03-V2

Operate your flashlight remotely thanks to this remote switching system. Perfect for use in tactical situations when mounted in conjunction with a rail mount.

SNAP HOOK CARABINER



ALB-20

Multi-purpose snap hook perfect to help you quickly access items hooked to your belt or pack. Featuring a quick-release latch, bottle opener, and screw driver.

TACTICAL PENS



T5 / T5T1

These tactical pens are not only designed to be used in tactical situations, but are also exquisite writing instruments. A favorite for even for the most discerning pen aficionado.

TRAFFIC WAND



AOT

Point the way to safety with this click-and-go accessory from Fenix. Long-distance visibility improves as does close-in traffic management.

UNIVERSAL MOUNT




BIOBKMT

Perfect tool for any flashlight owner who needs to attach their flashlight to a tent, camper, bicycle, tree—just about anywhere where hands-free light is needed.

THE FENIX CONSTRUCTION

Fenix prides itself in keeping up with the latest lighting technologies and build techniques. Fenix lights will always be the most innovative, brightest and toughest lights on the market.

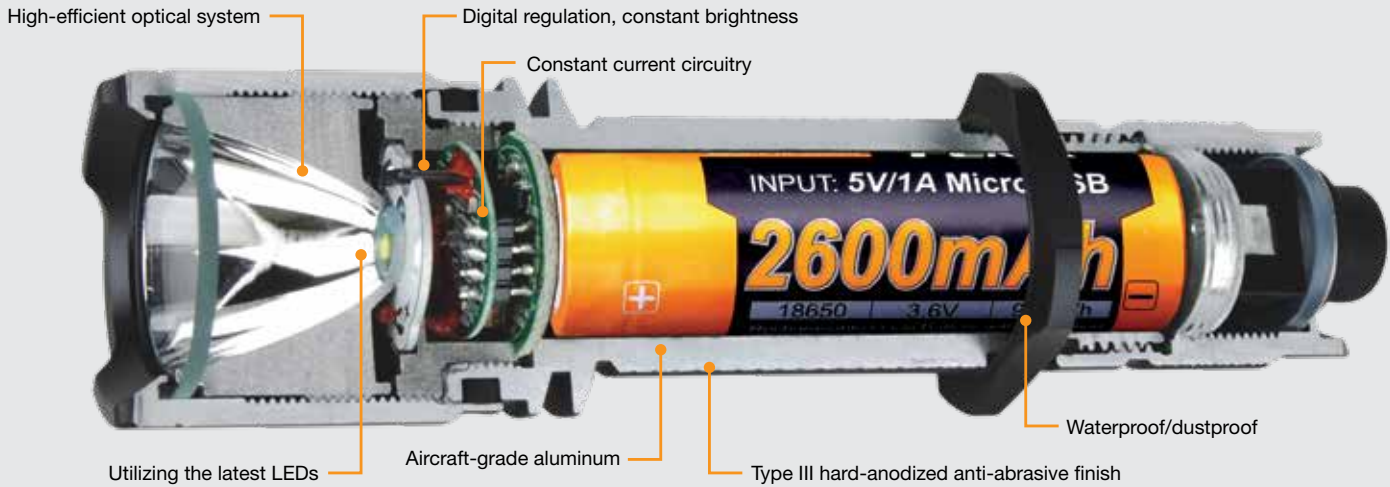

THE FENIX PROTOCOL™ GOES BEYOND

By adding up to eight extra testing steps, the FENIX PROTOCOL puts devices in situations that more closely mirror the flashlight users' reality through a) shakeout, b) bending, c) salty spray, d) ultraviolet radiation, e) environmental, f) vibration, g) switch and h) temperature testing.



SHAKEOUT TEST

evaluates the scratch and wear resistance of the flashlight's surface



BENDING TEST

challenges the bending degree and inherent strength of internal wiring systems



SALTY SPRAY TEST

puts the light into corrosion-provoking conditions beyond what most will ever face



ULTRAVIOLET RADIATION TEST

monitors the light's performance after intense exposure to UV radiation



ENVIRONMENTAL TEST

pushes low and high temperature ranges to verify performance at extremes



VIBRATION TEST

jars the light over thousands of cycles to validate resistance to rigorous forces



SWITCH TEST

checks switch function well over the projected lifespan of the light









TEMPERATURE TEST

determines heat generation and dissipation of Fenix' powerful LED systems

HIGHER STANDARDS = BETTER FLASHLIGHT PERFORMANCE

ANSI package symbols make it easier to buy with confidence. Six baseline tests allow flashlight users to compare essential performance attributes. While not a comprehensive evaluation of individual lights, ANSI FL-1 Standards are the start of intelligent buying.

| | | | |
|---|--|---|---|
|  | <p>LIGHT OUTPUT measures total quantity of light energy = how BRIGHT it appears. Three samples are tested with fresh batteries for output measured in lumen</p> |  | <p>PEAK BEAM INTENSITY measures the brightest point = how STRONG the light is. Lux levels at 2, 10 or 30 meters are taken within the first 2 min of operation</p> |
|  | <p>RUNTIME measures hours to 10% brightness = how LONG batteries last. Fresh batteries are run at the light's maximum brightness level and other levels</p> |  | <p>IMPACT RESISTANCE checks function when dropped = how HIGH a drop it can take. Six drops are made at different angles starting at one meter</p> |
|  | <p>BEAM DISTANCE measures where the light diminishes = how FAR the light shines. Rated distance – in meters – is where a luxmeter detects 0.25 lux</p> |  | <p>WATER RESISTANCE checks the light's dependability = how RESISTANT it is to water. Splashing, temporary or total immersion are tested immediately after 30 minutes of exposure</p> |

CUSTOMER SERVICE/ORDERS

HOURS OF OPERATION

9:00 am to 5:00 pm CST

Toll Free: 888-775-9996

Fax: 888-775-9991

Email: orders@fenixlighting.com

FENIX LIGHTING US HEADQUARTERS

BILLING ADDRESS

10488 W. Centennial Rd. #301

Littleton CO 80127

SERVICE REPAIR CENTER & WAREHOUSE LOCATION

161 Market Street

Monticello, AR 71655

MERCHANDISE RETURNS

Merchandise may not be returned without the prior approval of Fenix Lighting US. Please contact customer service with any inquires you have on product that was shipped in error or is found to be defective in workmanship and quality. If a customer returns product to same retailer of purchase, then the retailer has the ability to satisfy their consumer directly or refer to our customer service department. In the event the retailer exchanges product to satisfy the consumer, then the retailer may return the faulty product exchanged by consumer for credit or equal replacement product by contacting customer service.

REPAIR POLICY

If your Fenix product has a manufacturer's defect covered by our warranty, we will either repair or replace it, at our option, without charge. Return it to your place of purchase or send it to the Service Repair Center address. Please include your 1) name, 2) address, 3) phone number and 4) email address (optional) with the product.

Most damaged Fenix products not covered by the warranty can still be repaired. If repair costs and handling charges apply, you will be notified prior to any service. Please send to the Service Repair Center address. Include your 1) name, 2) address, 3) phone number and 4) e-mail address (optional) with the product. Do not send to the Headquarters address.

All warranty repairs or replacements are at the sole discretion of the Fenix Lighting US Authorized Repair Center and we reserve the right to refuse a request for any reason.

LIFETIME LIMITED WARRANTY

Fenix Lighting US, guarantees all Fenix products purchased from retailers directly supported by them to be made of first-class materials and therefore provides a lifetime warranty against any defects in material and workmanship.

Excluded from warranty coverage is any damage to the exterior deemed reasonable wear and tear such as scratches and/or fading of color. In addition, the warranty does not apply to damage caused by abnormal or unreasonable use of any of the components. This includes use of unapproved batteries in Fenix products (see user manuals). This warranty is in place of all other warranties, including warranty of fitness for a particular purpose and warranty of merchantability and excludes any liability for incidental or consequential damages.

LIMITATION OF LIABILITY

The liability of Fenix Lighting US in regards to the sale and delivery of goods according to the invoice is limited to repair and replacement of, or credit for, defective goods, at the option of Fenix Lighting US. Under no circumstances shall Fenix Lighting US be liable for economic loss or for any other special, indirect, incidental or consequential damages, of any kind suffered by purchaser.

FENIX LIGHTING US PROMISE

We promise to support you (the retailer) and your consumers to deliver the highest level of satisfaction. That means taking responsibility for promptly solving product, service or warranty problems. If, as a retail partner, you are not satisfied with the service you have received at any time, then please contact us directly at customerservice@fenixlighting.com. The goal remains your satisfaction – and success – as a key member of the Fenix Lighting US retail network.

* The runtime of this mode is the accumulated time without time-limited downshifting and overheat protection.



fenixlighting.com

CUSTOMER SERVICE
(888) 775-9996 (9:00 am-5:00 pm CST)
orders@fenixlighting.com

FENIX LIGHTING US HEADQUARTERS
10488 W. Centennial Rd. #301
Littleton, CO 80127

© FENIX LIGHTING US
Specifications subject to change
without notice.