



B60 (18650x1) / 02193

Puissance lumineuse maximum 1000 lumens

Aoneng Lighting Co., Ltd.


Merci d'avoir choisi une lampe NICRON.,
Assurez-vous d'avoir lu et compris l'intégralité
de ce manuel avant utilisation.

[En] Product Features

- 1.Fashion patent appearance design, good touch feeling, comfortable size.
- 2. High quality aluminium body with anodizing finish,.
- 3. Using CREE LED, 50000 hours life time.
- 4.Standard USB cable charger can be uncommon use with normal mobile phone. With Charging indicator light.
- 5. Strong & unique hot releasing system.
- 6. Import electrical component with high efficiency constant current circuit design to extend run time.
- 7. Overcharge and over discharge PCB design to protect the battery life.
- 8.Can handstand, body switch easy to adjust the light mode. (Switch life tme: 10000cycle).
- 9.Gold plating contact pin never rust.
- 10.IPX8, 2 metre water resistant.

Parameter Description

- 1. Fashion setting as below table:
- 2. Buld: CREE white light LED
- 3. Using 1pc safrtly 18650 Li-ion rechargeable battery.
- 4. Voltage range: 3.0V~4.2V
- 5. Material: Aluminium Alloy
- 6. Weight: 150g, exclude the battery
- 7. Size: 155 × 25.4 × 37mm
- 8. Normal usage temperature: -20°C~50°C.

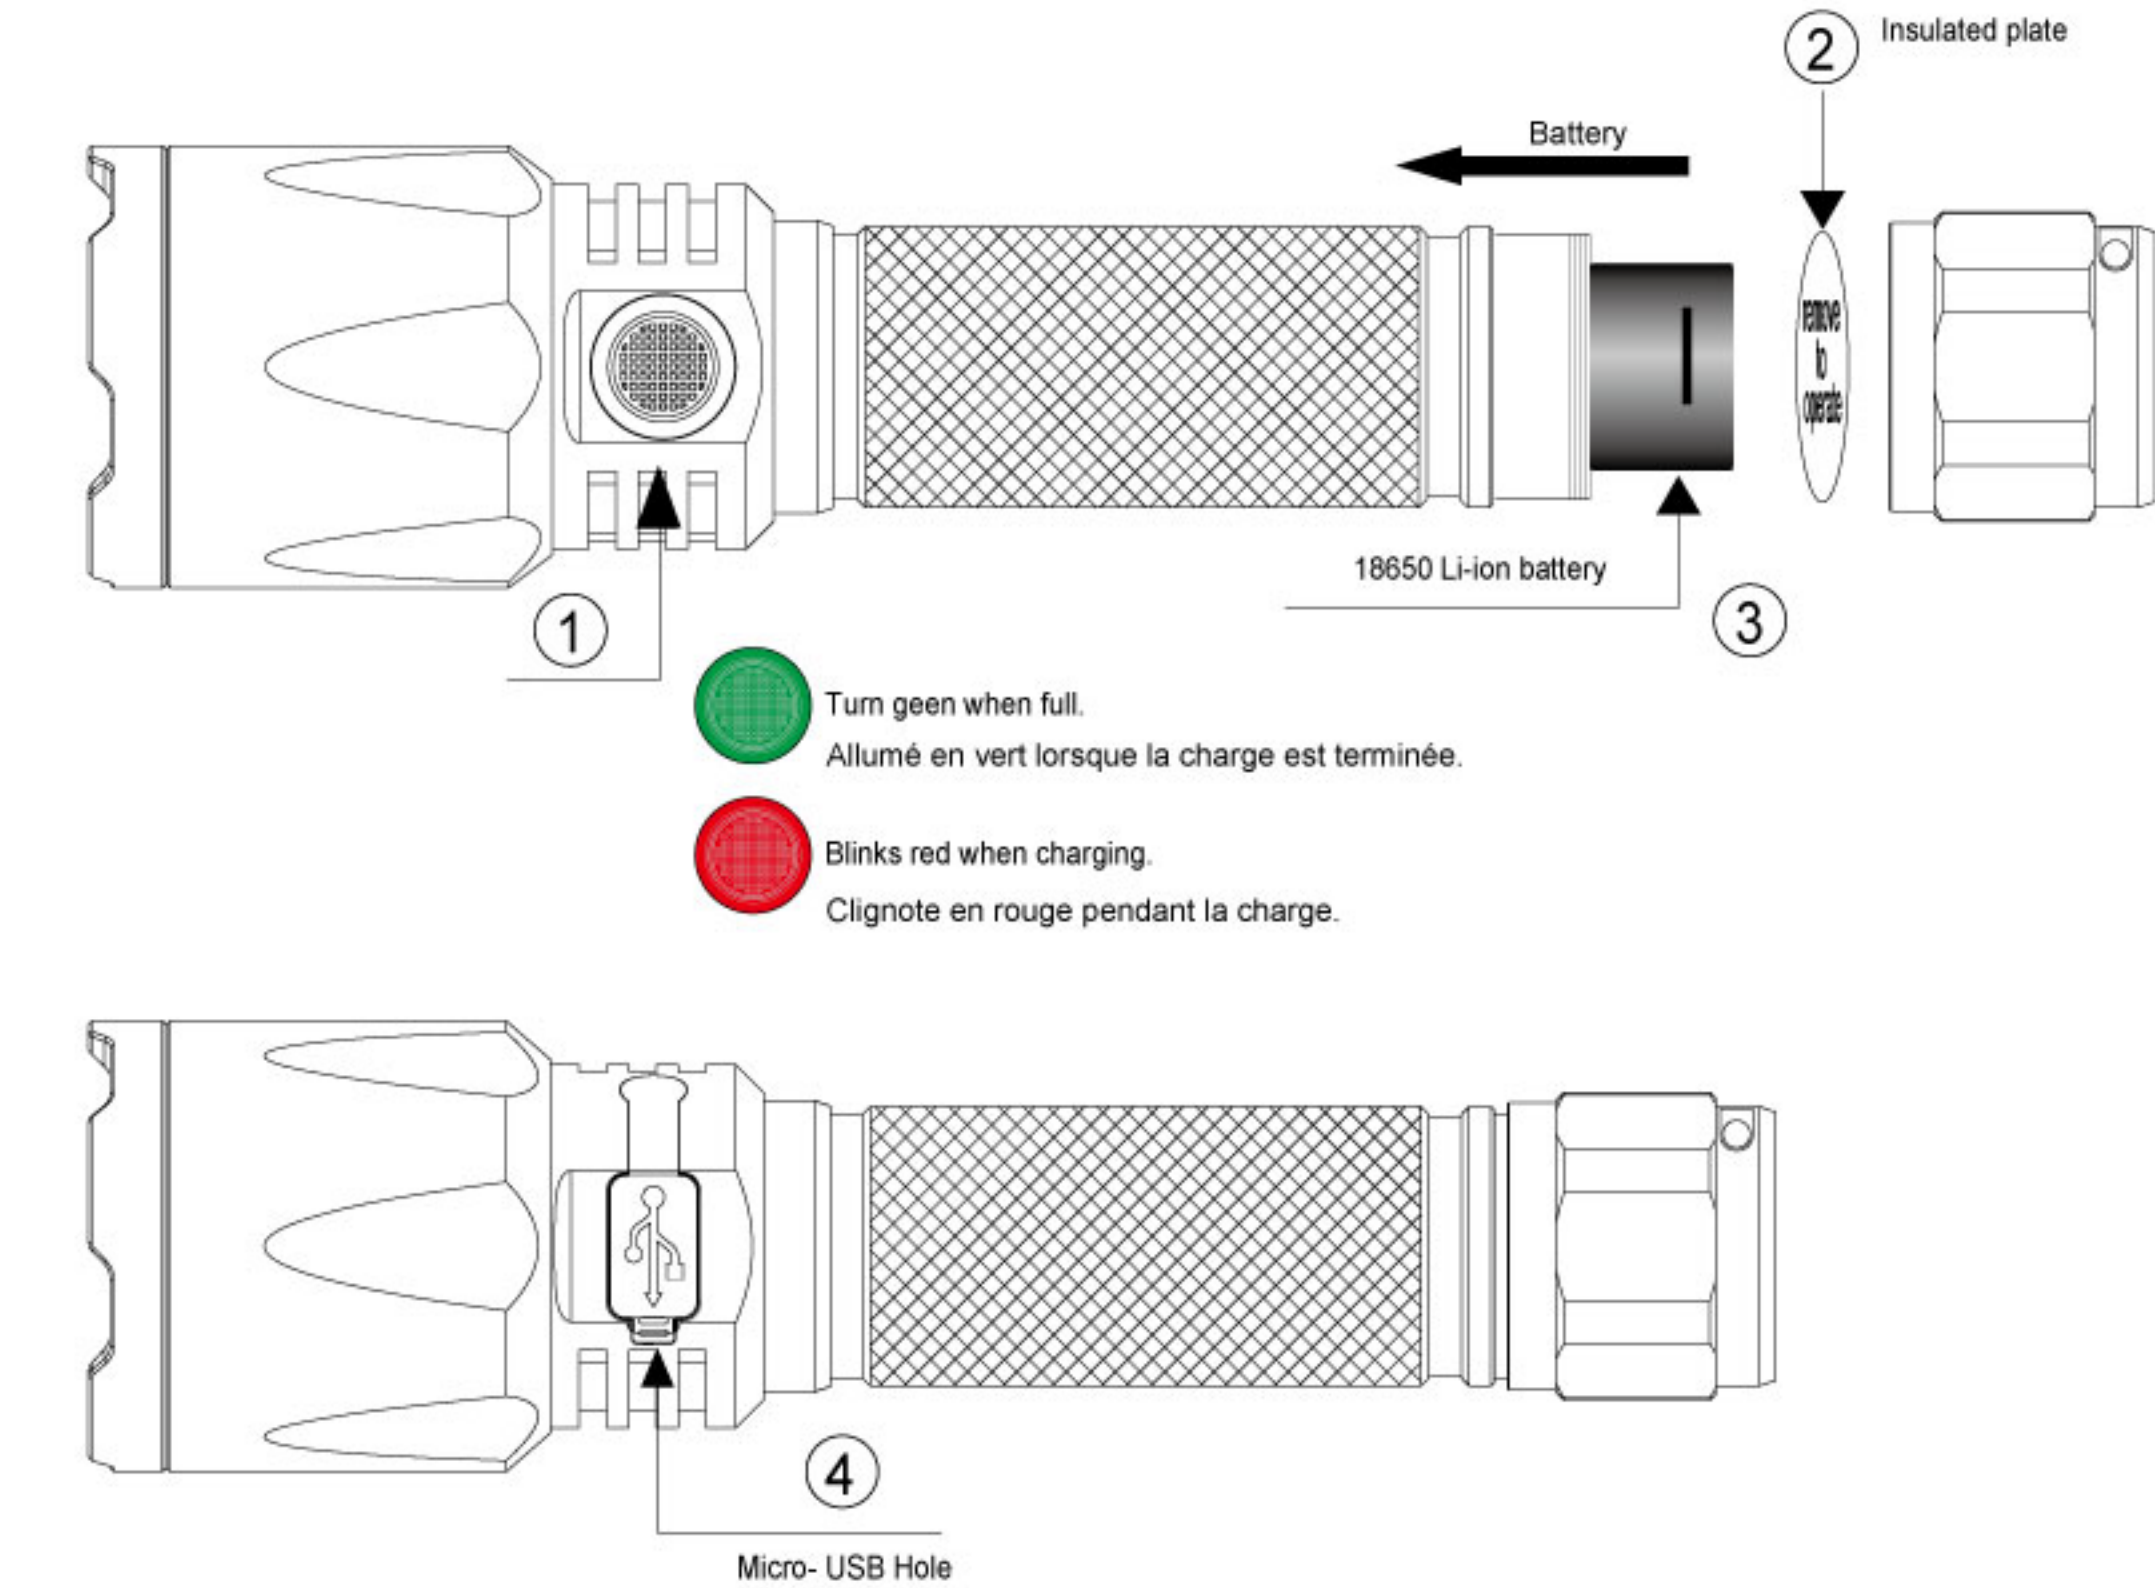

FL1 STANDARD	LOW	MED	HIGH	MAX	Strobe	SOS
brightness (LM)	50	140	450	1000	1000	1000
run time (hrs)	35	15	5	4	N/A	N/A
beam distance	358meter					
ma intensity	20000 cd					
drop testing	1 meter					
water resistant	IPX 8 , raining resistant					

Above datum tested base on ANSI/NEMA FL 1-2009 standard with the 18650 Li-ion battery (3400mAh), maybe vary depending on different environment.

Operating Instructions

- 1.Normal Mode:
Press switch button active: Low→ Med→ High;
- 2.Hidden Mode:
Press switch button 1second actives: Highest→ Strobe → SOS;
At any mode, press switch button 2second active: Strobe→ SOS;
- 3.Normal Mode and Hidden Mode could change each other that press switch button 2 second.
- 4.Charging:
Put rechargeable battery in correct direction into touch, then plug the Micro-USB. The switch button blinks red when charging, turn green when full.

Use and Maintenance

- 1. Please do not open the fixed head parts, otherwise, has risk to damage the light without warranty.
- 2.Please use good quality battery, take out the battery when you are going to power off for a long time, since the battery maybe damaged or bomb by itself if you put it for a vary long time.
- 3.Please foten to clean the current contact pin and surface to ensure light up normally, especially when you find out the light flash a little bit by itself.
- 4.Please close the concealed charge and reverse charge module if you do not need when using and store.

Below is the normal cannot work and flash issues:
Caution 1: battery run out
Solution 1: please use new battery in correct direction.
Caution 2: thread or PCB with dirty thing.
Solution 2: clean the PCB or thread by Alcohol swabs, if still not work.


Caution

- 1.Please do not face to your eyes to light up, it will dangerous to damage your eyes and eye slight.
- 2.The products only design to use 18650 size battery.
- 3.Do not throw the Li-ion battery into fire or water, please put it in correct polarity when charging.
- 4.We suggest charging the battery each 3 mouths, at laest to protect the battery life if you plan to storage the produc for a long time.
- 5.Please keep the battery far away from children, if eating by mistake, please go to hospital at once.

Warranty Terms

- 1. Within 15 days of purchase, any defactive lights will be offered free replacement by NICRON distributors unconditionally, except for damages caused by misuse, insert batteries in wrong way or batteries weeping.
- 2. Within 24 mouths from the date of purchase, NICRON Co., Limited offers free repair after sevice, except for damages caused by misuse, insert batteries in wrong way or batterise weeping.
- 3.Limited lifetime warranty. NICRON Co., Limited will still provide with warranty service. Labor is free but we will charge for parts. The total repair fee is assessed according to the cost of the replaced materials. Freight should be paid by customers.
- 4. More details about warranty service, please contact local distributors or dealers.

Operating Map

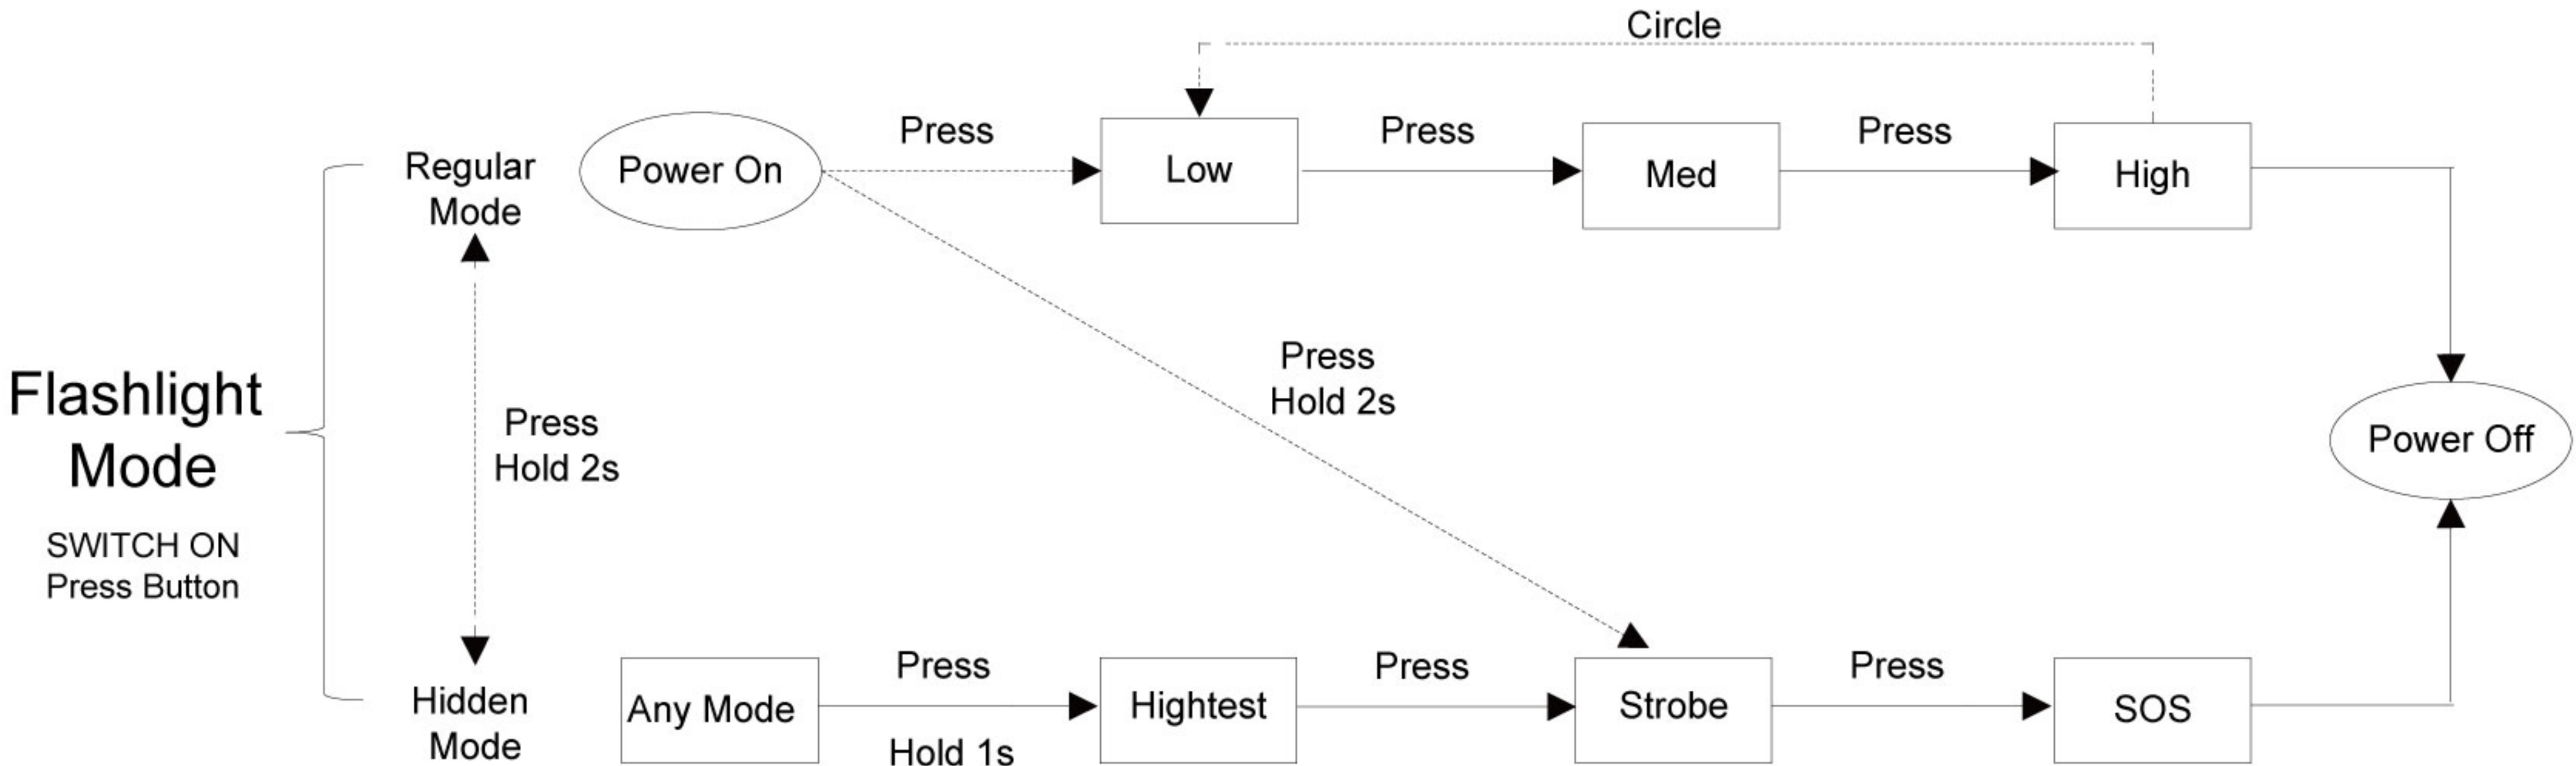

Aoneng Lighting Co., Ltd.
No. 2, North Shunyuan Road, Shunde Industrial Park,
Wusha,Daliang,Shunde,Foshan,Guangdong,China.
post code: 528333
Официальный представитель на территории РК и СНГ -
интернет-магазин KupiFonar.kz
8 (727) 2496770
email: info@kupifonar.kz
web: <https://www.kupifonar.kz>

