

Copy Right January 2015, V1.0
All Rights Reserved By Fenixlight Limited

FENIX
www.fenixlight.com

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93 Fax: +86-755-29631181
Email: info@fenixlight.com www.fenixlight.com
Address: 8/F, 2nd Building, DongFangMing Industrial Center,
33rd District, Bao'an, Shenzhen 518133, China

Website




Facebook



Youtube



2015 PRODUCT CATALOG

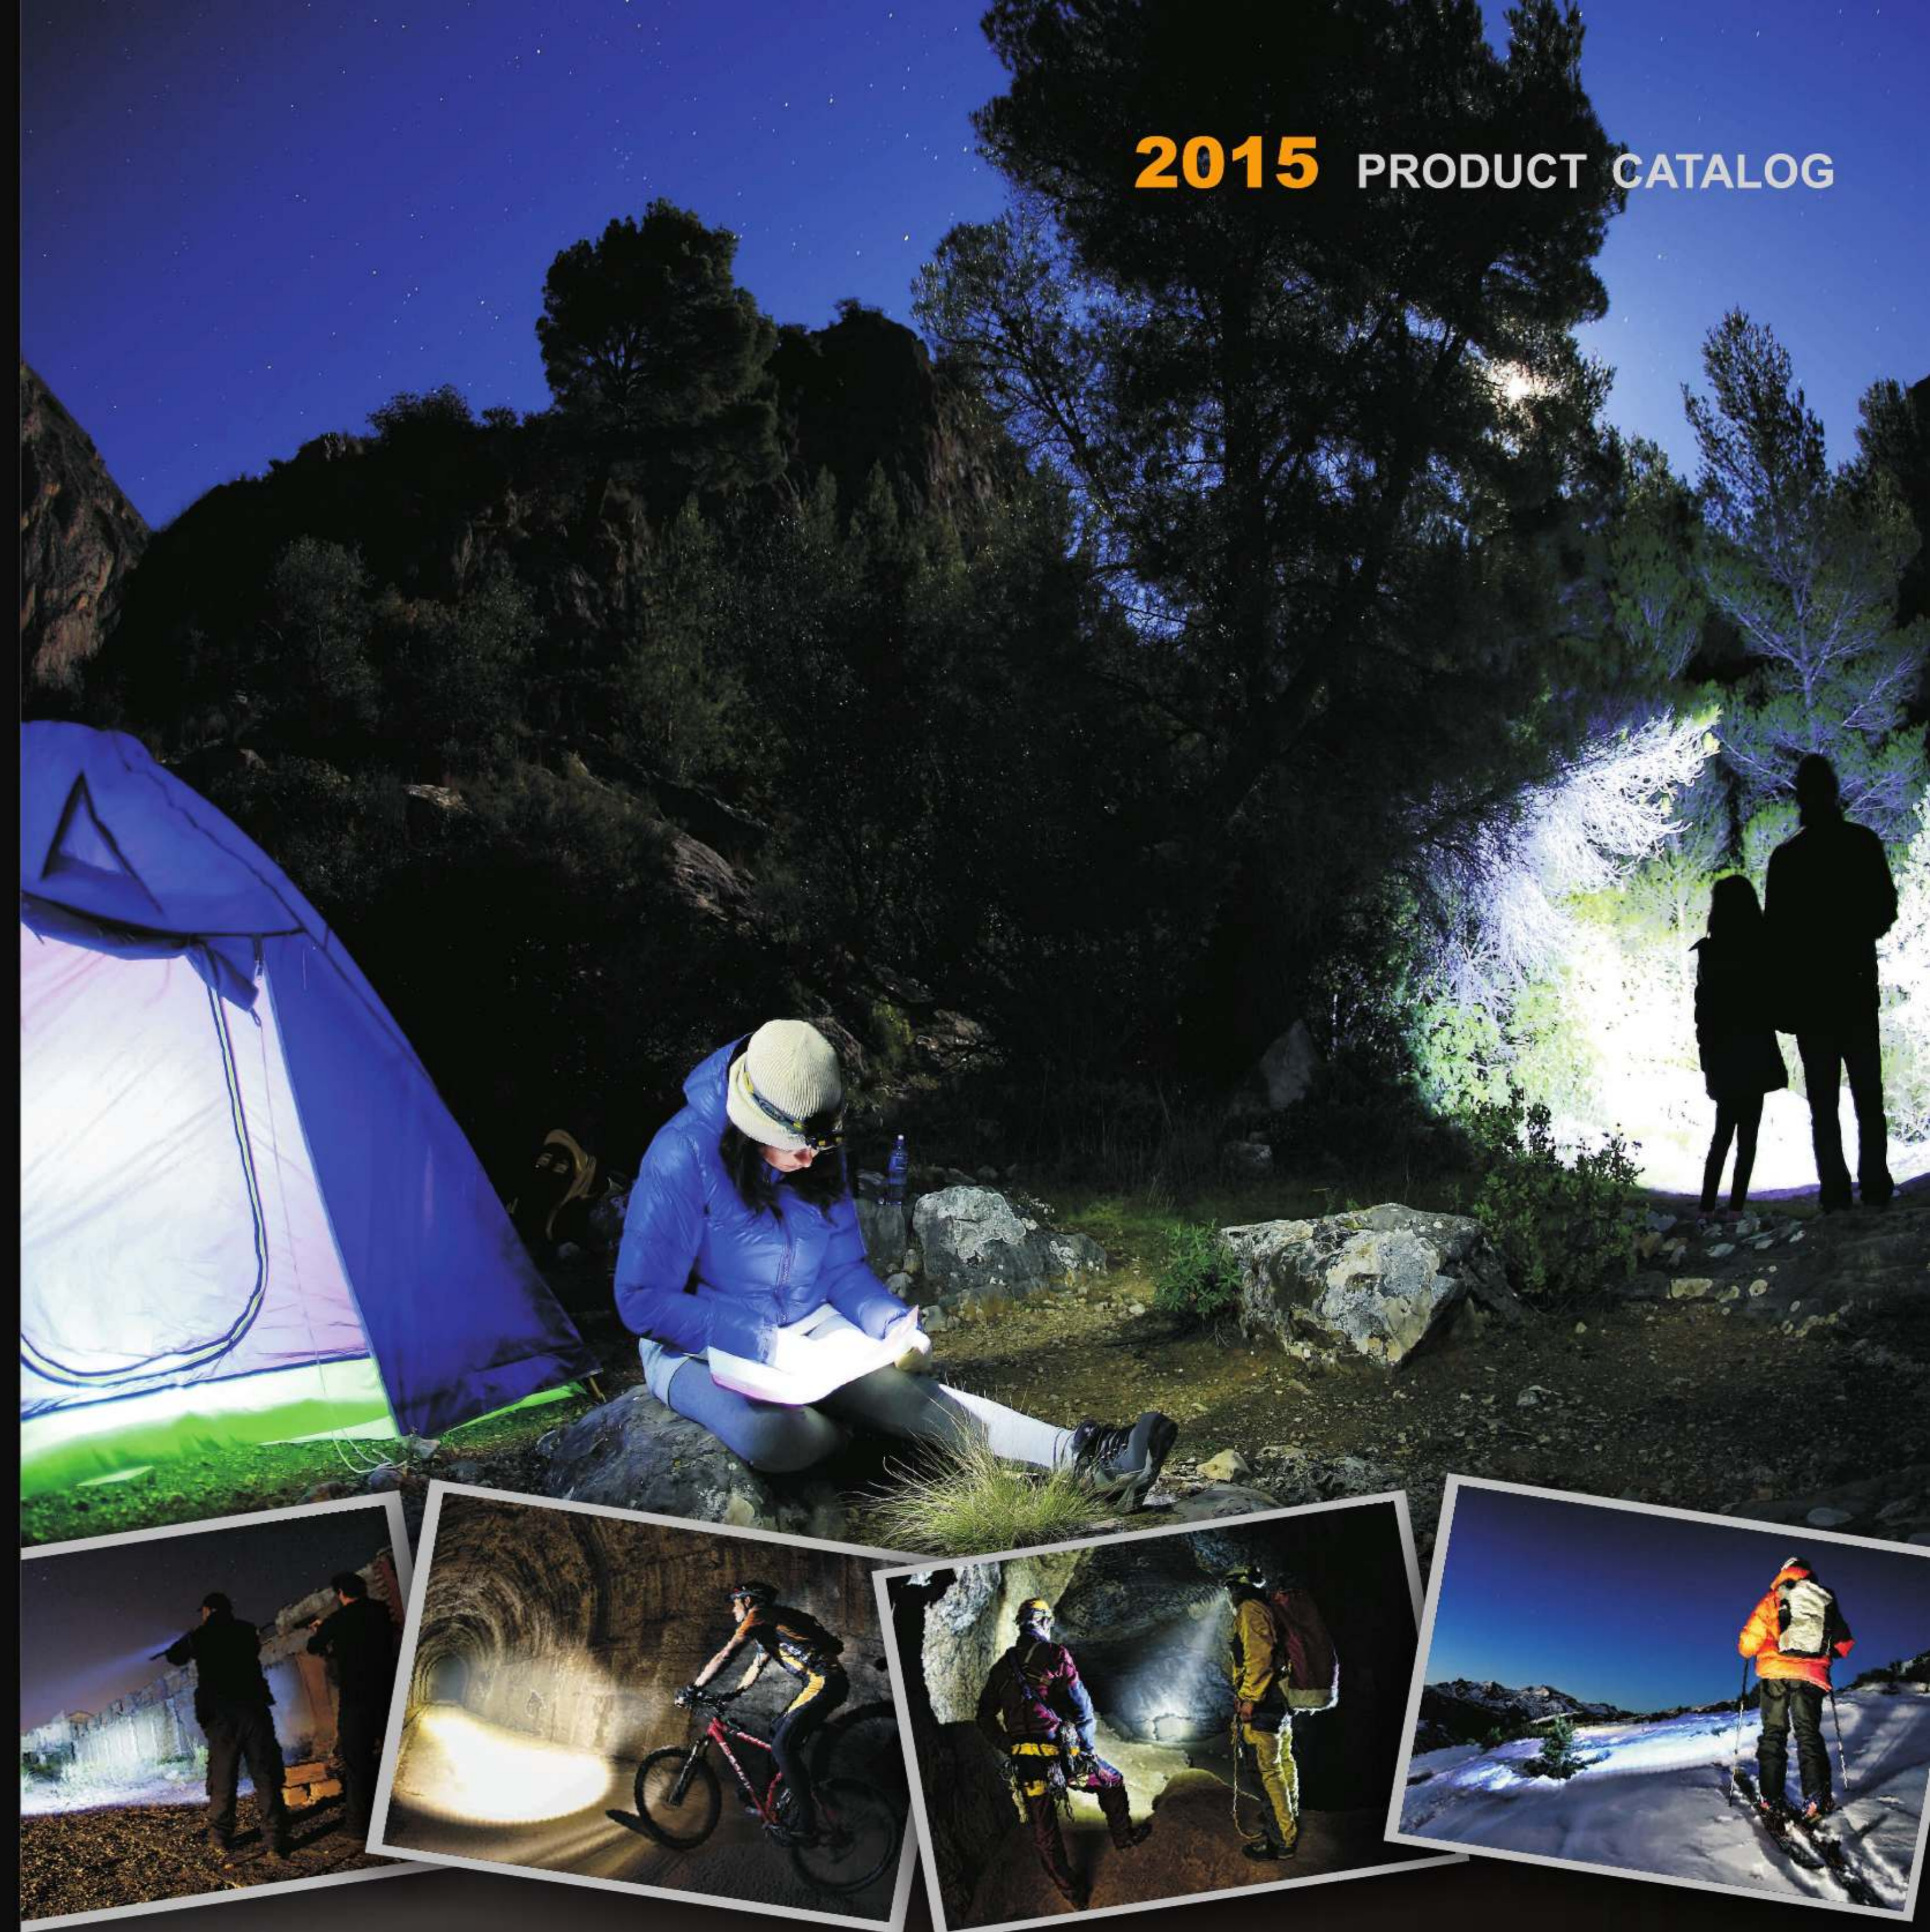

FENIX
Illuminate Your Adventure



To Be One of the Best Outdoor Sports Lighting Brands in the World

Company Introduction

Fenix is a leading outdoor sports lighting brand as well as a China's national high-tech enterprise specialized in R&D, manufacturing and sale of outdoor sports lighting tools, including flashlight series, headlamp series, bike light series, camp lantern series, etc. Today, Fenix products have been sold to more than 100 countries around the world.

With the innovative lighting technology and solutions, Fenix is developing LED lighting tools with high performance, high reliability as well as exquisite craftsmanship to satisfy the customers' pursuits for multi-functional and high-standard illuminating tools. The products are widely used in the fields of outdoor sports, industry, law enforcement, military, EDC, etc. As every product released with excellent performance and reliable quality, Fenix is now known worldwide as a premium LED light brand.

Committing to the mission of innovating outdoor sports lighting and achieving user's pleasing experiences, Fenix aims to be one of the best outdoor sports lighting brands in the world.



FLASHLIGHTS

P5 - P34

With the outstanding performance, reliable quality and exquisite workmanship, Fenix flashlights have won the global users' love and trust. Now the product lines have six series as follows:

- TK series: Tough and powerful flashlights
- PD series: Portable and high intensity flashlights
- LD series: Professional outdoor flashlights
- E series: Outdoor flashlights
- RC/UC series: High-performance rechargeable flashlights
- SD series: Technical diving lights
- MC series: Multi-purpose outdoor angle lights

HEADLAMPS

P35 - P44

With the advanced circuit technology, innovative optical system and reliable quality, Fenix headlamps have higher performance and better quality over the products at the same price in the headlamp market. At present, the product lines have two series as follows:

- HP series: High-performance outdoor headlamps
- HL series: Lightweight outdoor headlamps

BIKE LIGHTS

P45 - P48

Fenix bike lights carry forward the product innovation spirit of Fenix, and create the Dual Distance Beam system in order to achieve the effect of no blind area lighting, close-in visibility and long-range illumination, which is the first choice of professional bike lights.

CAMP LANTERNS

P49 - P50

Fenix camp lanterns are all about innovation and all around performance. From the ice cold north pole to the rainy tropical forest, the Fenix all-weather waterproof lanterns provide throughout uncompromised performance. Featuring from exclusive dual-fuel battery compartment to multifaceted globe and magnetic base, Fenix camp lanterns keep your adventure going anytime anywhere.

- CL series: compact lanterns for personal or backpacking tent lighting
- CP series: powerful lanterns for on scene or base camp lighting

HIGH PERFORMANCE

Utilizes the most advanced and world-class LED, achieving a perfect combination of high performance and durability;
High photoelectric conversion efficiency, making the limited electric energy transformed into light energy;
Outstanding constant current circuitry, ensuring Fenix flashlights constantly bright without any flickering as the battery discharges.

HIGH RELIABILITY

High-efficient heat dissipation system, ensuring the reliability and durability of our products;
Reliable structure design, taking full account into the flashlight's structure demand for heat dissipation, shock-resistant and waterproof capability;
Strict quality control, ensuring the high quality of the products from the material selection, producing and testing.


PERFECT LIGHTING EXPERIENCE

Excellent optics design, making the beam of Fenix flashlights a fine blend of far throwing light and soft illumination with a perfect combination of hot spot and floodlight;
Intelligent digital regulated circuit, providing multiple modes and brightness levels to meet different lighting demands;
User-friendly operation, simple, easy and convenient.

EXCELLENT WORKMANSHIP

Toughened, ultra clear, anti reflective coated lens for highly efficient light transmission;
Aircraft-grade aluminum material and Type III hard-anodized anti-abrasive finish, making Fenix flashlights water-resistant, durable and scratch-resistant;
IPX-8 waterproof design, underwater 2m.

MAIN FEATURES OF FENIX FLASHLIGHT

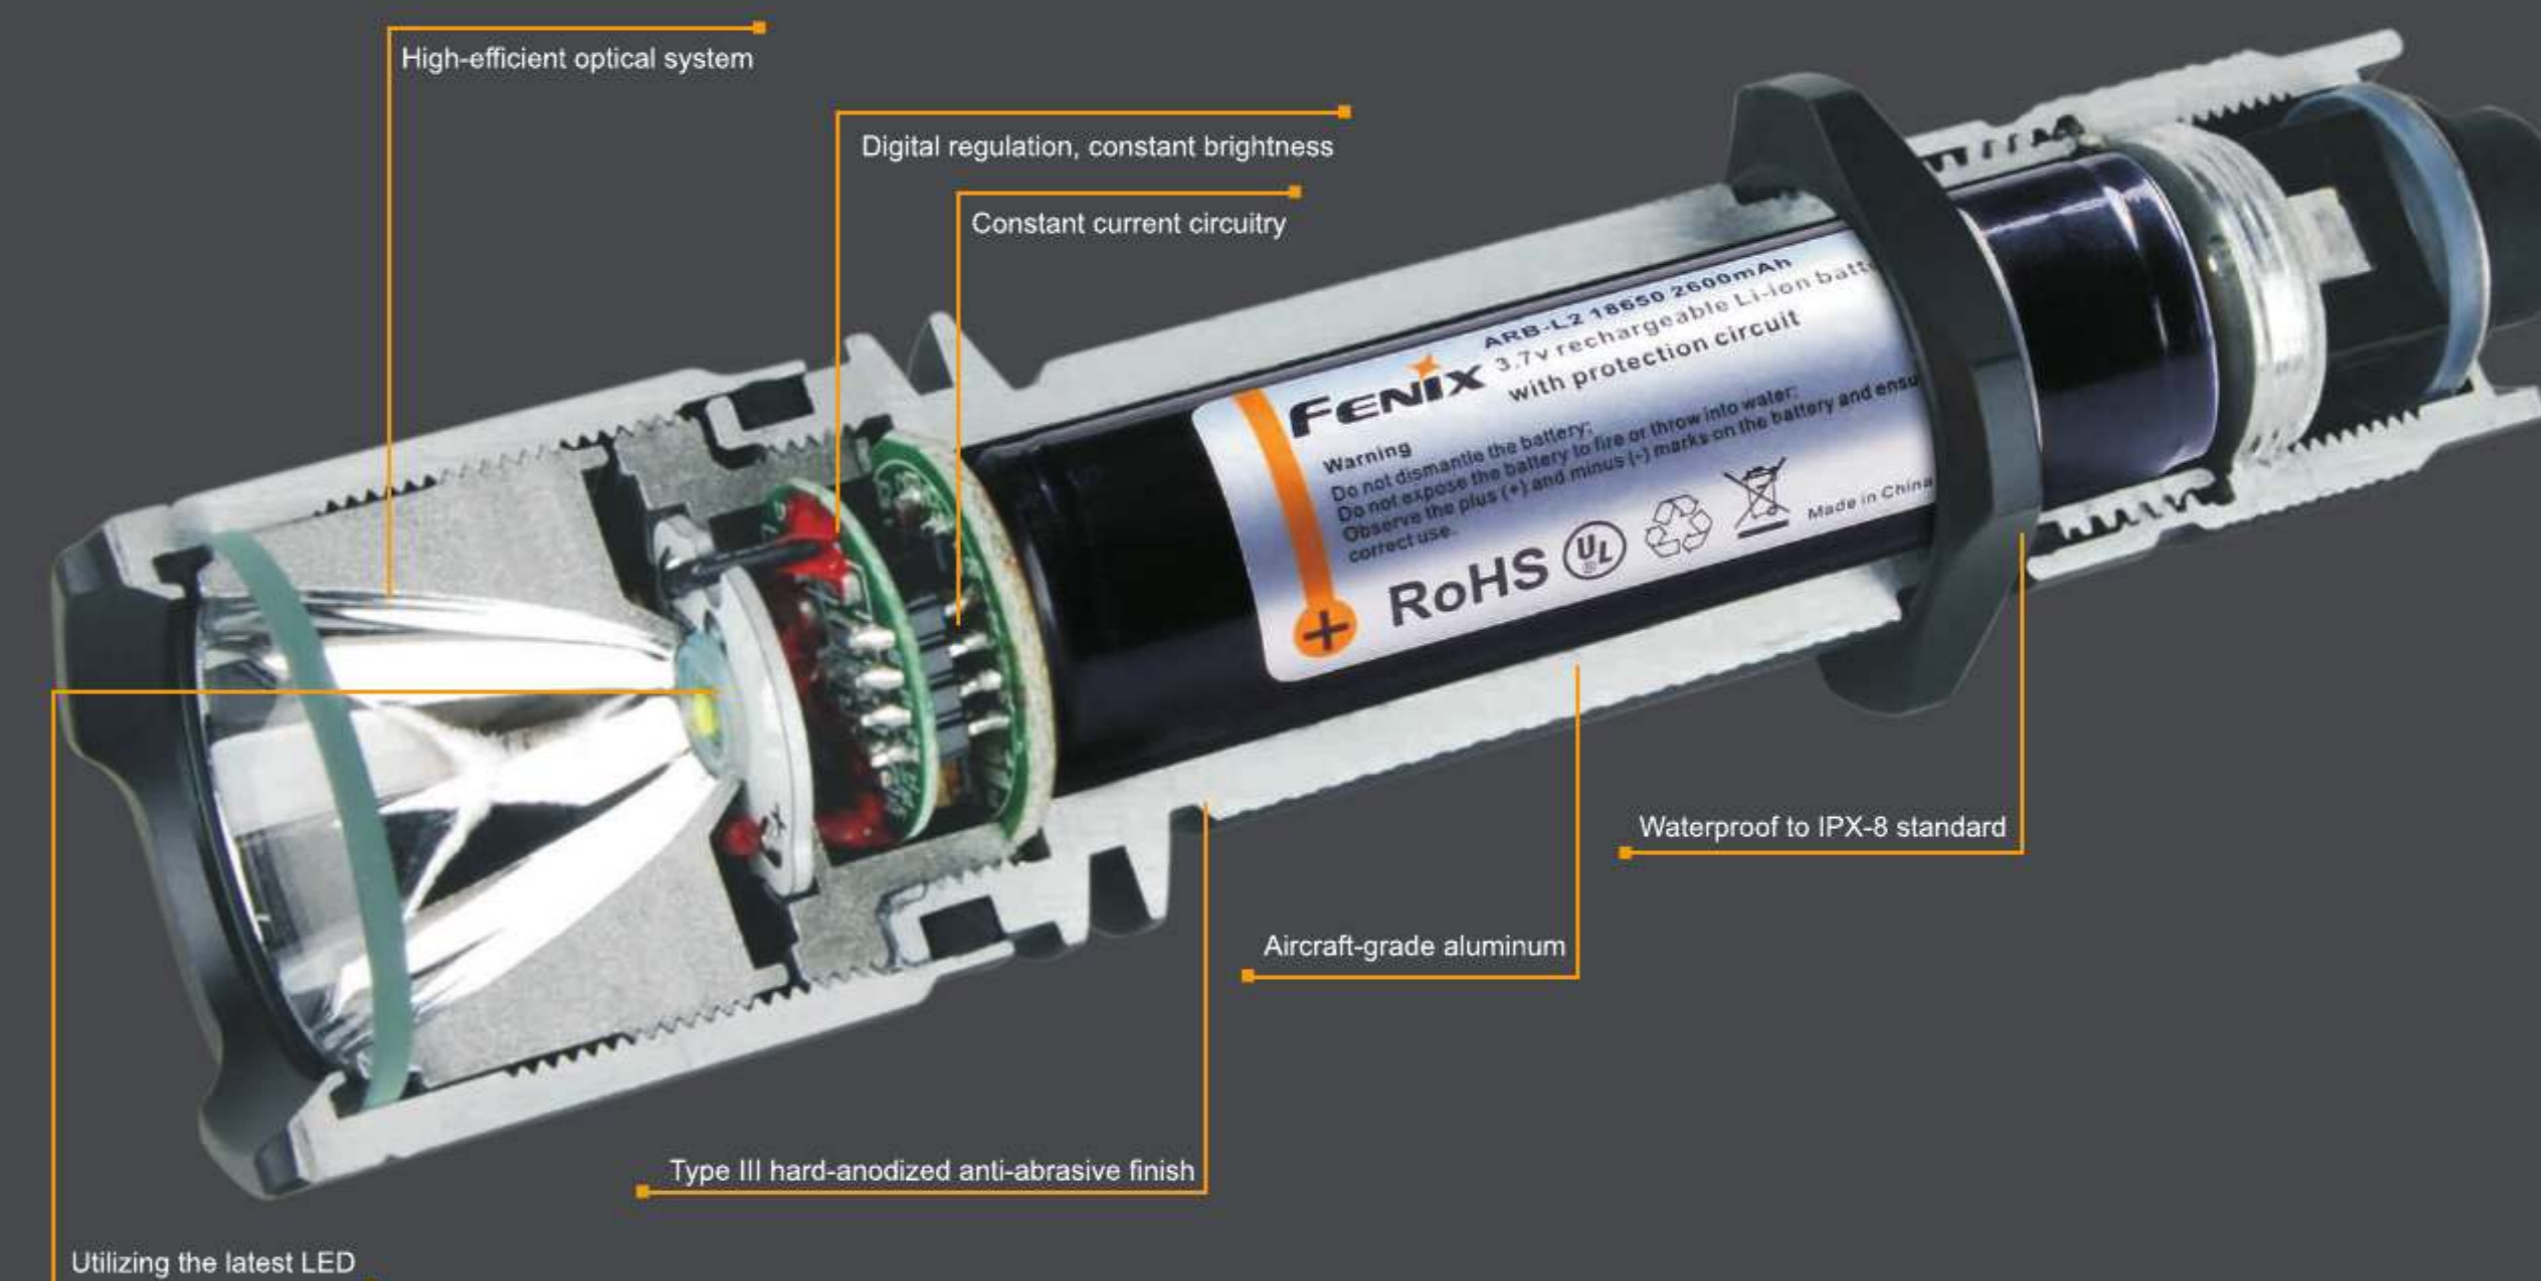

ANSI/NEMA FL1 STANDARD

Fenix has implemented the ANSI Standard strictly to test various performances of the lighting devices.





BRAND ORIGIN

As the great Chinese thinker Lu Xun said, "Improvement roots from dissatisfaction". The establishment of Fenix also roots from "dissatisfaction". A group of young men, passionate about high quality illumination tools but unsatisfied with the lighting products at that time, set out to make perfect flashlights, even the best flashlights in the world. Adhering to concept of "providing the excellent products for the customers with our innovative design", Fenix has grown up to be the world-renown outdoor sports lighting brand!

BRAND CONNOTATION

Fenix, roots from the English word phoenix [fi:niks], Chinese translation is "phoenix, perfect thing". And phoenix stands for luck, blessedness and perfection in traditional Chinese culture.


FENIX'S AWARDS

- ★ National High-tech Enterprise
- ★ The Best in Show Awards in 2011 Outdoor Retailer Trade Show
- ★ LD 20 got the title of "Best LED Flashlight"
- ★ 2011-2013 "Zunlv Award"-the annual election of Chinese outdoor industry
- ★ "The Best of Show Award" AFTA Trade Show 2013
- ★ ISPO Award Winner 2013-2014
- ★ BC30R Got the Silver Award of Asia Outdoor Industry Award 2014
- ★ Commented as "Top 10 Travel Gadgets Under \$50" by New York Times
- ★ Silver Prize in Chinese Outdoor Gear Award
- ★ Flashlight of 2005
- ★ Silver Prize in Asia Outdoor Industry Award
- ★ "Best Bargain" by Backpacker Magazine
- ★ "Editor's Choice Award" by Outdoor Life Magazine
- ★ The Best Cycling Gear of 2013 by Outside Magazine
- ★ Single-product Brand of the Year 2013



The Products are Very Popular to The Outdoor Sports Lovers

The flashlights are widely used in the fields of hiking, camping, hunting, caving, searching, public security, EDC, etc. The headlamps are widely used in the fields of hiking, camping, night running, caving, climbing, rock climbing, fishing, night skiing, etc. The bike lights are used in mountain biking, roadway biking, commuting, etc.

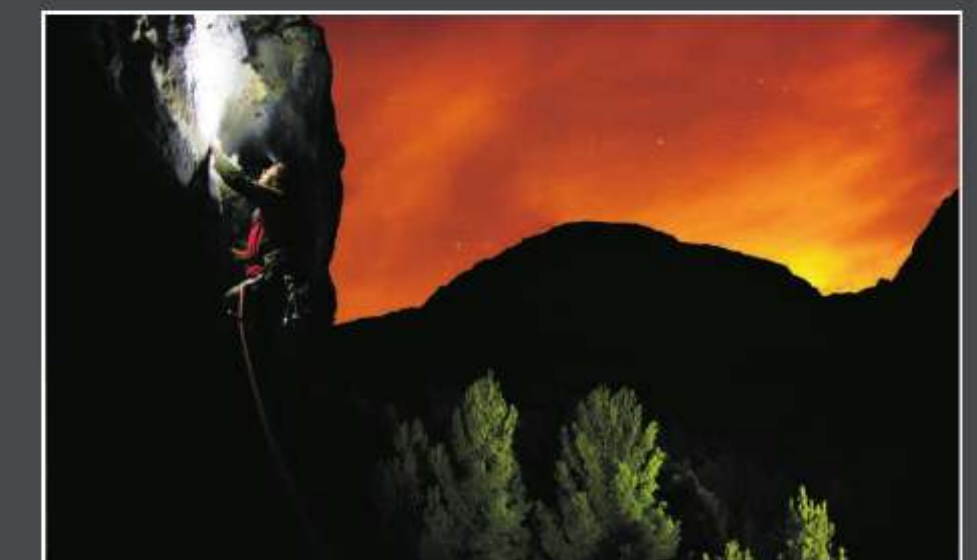

Illuminate Your Adventure

"Activity, optimism and health" are parts of Fenixlight Limited culture. Fenix has been advocating outdoors sports life style, cultivating people's interest in outdoor activities and encouraging people to participate in more outdoor activities.



Fenix signed a long-term strategic cooperation agreement with Summit Outdoor School



Fenix-Mr.Tie Gai Circumambulating eight holy mountains



Fenix provided help for Ricar to challenge the UTMB race



Fenix-Chongqing Caving Exploration Team



Fenix sponsored Mountaineering Association of Peking University to reach Geladainong Peak




Fenix sponsored Finnish Tahko MTB race



Fenix Sponsored Zhao Xingzheng to reach the summit of the Unclimbed Mountain



Fenix provided help for participants in Sahara marathon

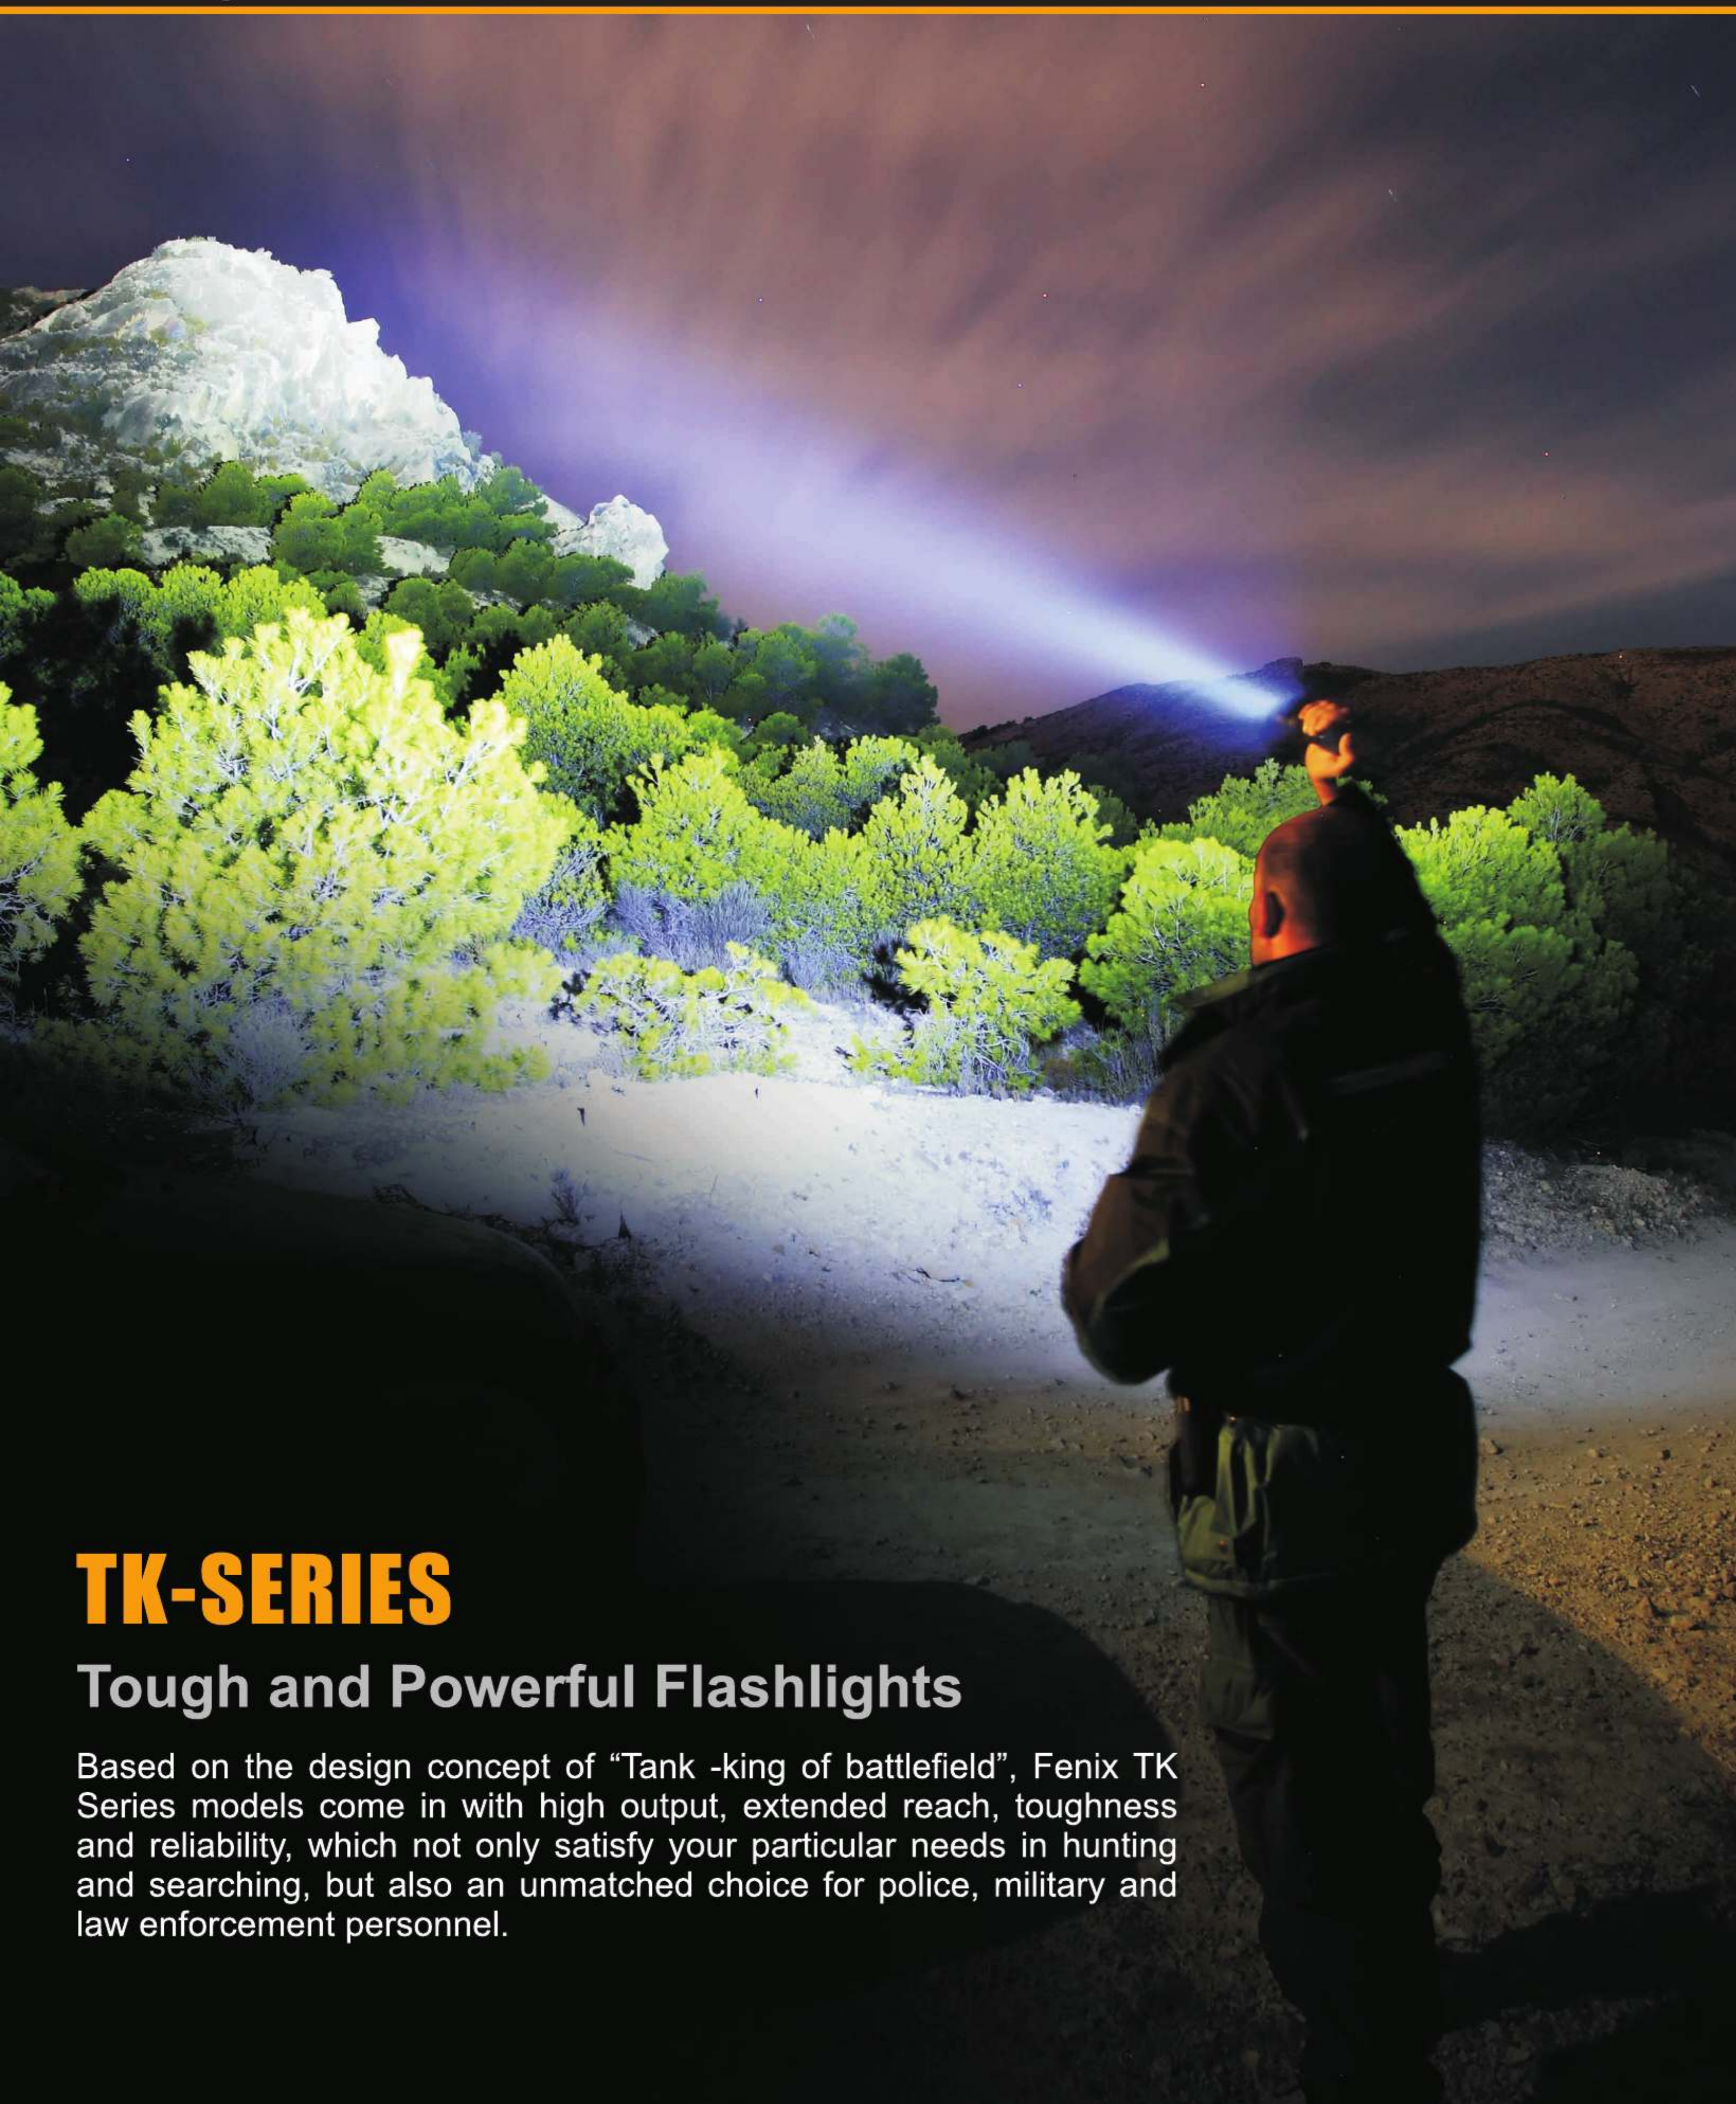

TK-SERIES

Tough and Powerful Flashlights

Based on the design concept of “Tank -king of battlefield”, Fenix TK Series models come in with high output, extended reach, toughness and reliability, which not only satisfy your particular needs in hunting and searching, but also an unmatched choice for police, military and law enforcement personnel.

TK76 Max 2800 Lumens

The Fenix TK76 Flashlight utilizes three separate LEDs to offer a broad range of illumination options and power display function. Output up to 2800 lumens creates intense area lighting combined with long reach. Ideal for group leaders needing high output and multiple beam patterns, the Fenix TK76 is a powerful addition to a team's onsite lighting tools with instant turbo, strobe and SOS.

- Three individually-controlled light sources
- Instant turbo
- Instant strobe
- Intelligent circuit design

SIZE: Length: 222mm (8.7 in.) Tube diameter: 55mm (2.2 in.) Head length: 100mm (3.9 in.) Head Width: 77mm (3 in.)

WEIGHT: 800g (28.2 oz) excluding battery



ANSI/NEMA FL 1

MODE	THREE HEADS		SINGLE HEAD		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	OUTPUT	RUNTIME	OUTPUT	RUNTIME				
TURBO	2800Lumens	1h 10min	933Lumens	3h 30min	450m	50800cd	1m	IPX-8 underwater 2m
HIGH	1100Lumens	4h	350Lumens	11h 30min				
MID	420Lumens	11h	135Lumens	33h				
LOW	20Lumens	66h	7Lumens	200h				
STROBE	2800Lumens	/	/	/				
SOS	420Lumens	/	/	/				

TK75 Max 2900 Lumens

With the Fenix TK75, four 18650 rechargeable cells are stunningly transformed into 2900-lumen max output. Throwing 690m with an 80-degree plus beam angle lets the TK75 light up extended terrain.

On high at 1200 lumens, this compact Fenix flashlight pushes for 4 hours while the 450-lumen level stays the course at 12 hours runtime. The stainless steel bezel, strobe and SOS functionality as well as the on-body dual switch system make the TK75 a trustworthy carry on searching, caving and scouting missions. Mounted on a vehicle or stowed for emergency use, this light captures the proven performance found in every Fenix lighting product.

- Uses CREE XM-L2 U2 LED
- Max 690m beam throw
- Over 8-day max runtime
- Over 80-degree flood beam angle
- Compact and portable, easy to carry

SIZE: Length: 185mm (7.3 in.) Tube diameter: 52.5mm (2 in.) Head diameter: 87.5mm (3.4 in.)

WEIGHT: 510g (18 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	2900 Lumens	1h 15min	690m (Max)	119500cd (Max)	1m	IPX-8, underwater 2m
HIGH	1200 Lumens	4h				
MID	450 Lumens	12h				
LOW	25 Lumens	200h				
STROBE	2900 Lumens	/				
SOS	450 Lumens	/				

TK61 Max 1000 Lumens

The handheld searchlight TK61 is scaled for ultra long reach and extended runtime. Utilizing a CREE XM-L2 U2 LED, the light reaches for 824 meters with 1000-lumen output. Four brightness level, instant turbo and SOS function are controlled by dual on-body switches. Powered by 4*18650 batteries or optional rechargeable pack, TK61 provides over four hours turbo output and compatible with TK75 extended runtime kit.

- Max 824m throw
- Ultra-long runtime
- Instant turbo
- Instant strobe

SIZE: Length: 216mm (8.5 in.) Body diameter: 52.5mm (2.1 in.) Head diameter: 96mm (3.8 in.)

WEIGHT: 600g (21.2 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	1000 Lumens	4h 20min	824m	170000cd	1m	IPX-8, underwater 2m
HIGH	400 Lumens	14h				
MID	130 Lumens	46h				
LOW	20 Lumens	300h				
STROBE	1000 Lumens	/				
SOS	130 Lumens	/				

TK51 Max 1800 Lumens

Fenix TK51 features our exclusive dual-beam system which produces a far reaching spot beam and a flood beam for close-in visibility. Utilizing two CREE XM-L2(U2) leds, TK51 boasts a 1800-lumen maximum output and a 425-meter throw. The light also features instant turbo and instant strobe function, you could access turbo output and strobe function by simply holding a button in any condition, even when the light is off.

- Dual-beam system
- Instant turbo
- Instant strobe
- Powered by three 18650 batteries

SIZE: Length: 188mm (7.4 in.) Diameter: 48mm (1.88in.)

WEIGHT: 430g (15.1oz) excluding battery



2013 Outdoor Industry Gear Annual Award

ANSI/NEMA FL 1								
MODE	SINGLE LIGHTS		TWO LIGHTS		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	OUTPUT	RUNTIME	OUTPUT	RUNTIME				
TURBO	900Lumens	3h 30min	1800Lumens	1h 45min	425m	45200cd	1m	IPX-8, underwater 2m
HIGH	400Lumens	9h	800Lumens	4h 30min				
MID	150Lumens	27h	300Lumens	13h 30min				
LOW	10Lumens	420h	20Lumens	210h				
STROBE	1800Lumens							

TK41 Max 900 Lumens

Fenix TK41 is a high-intensity multifunctional flashlight powered by AA batteries. The neck-mounted dual switch system can realize a fast selection between four different brightness levels and two various flashing functions. Featuring a max 900 lumens output and over ten days ultra long runtime, TK41 is the dependable partner when outdoor searching, caving or using as a spare light for automobiles, etc.

- The latest Cree XM-L2 (U2) LED
- User-friendly interface
- Two modes, four brightness levels
- Intelligent memory circuit
- Universal AA battery

SIZE: Length: 214mm (8.4 in.) Tube diameter: 40mm (1.6 in.) Head diameter: 62.5mm (2.5 in.)

WEIGHT: 320g (11.3 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	900 Lumens	2h 45min	510m (Max)	65050cd (Max)	1m	IPX-8, underwater 2m
HIGH	365 Lumens	8h 15min				
MID	120 Lumens	27h				
LOW	15 Lumens	240h				
STROBE	900 Lumens	/				
SOS	120 Lumens	/				

TK35 Ultimate Edition Max 1800 Lumens

Some boundaries are made to be pushed. Thanks to the revolutionary Cree MT-G2 LED, the TK35 Ultimate Edition produces 1800-lumen maximum output while still keeps the size and power options in tact. Besides the output boost, the neutral white Cree MT-G2 LED also provides better color rendition. The light features dual tail switch system for one hand operation.

- Utilizes Cree MT-G2 LED
- 1800-lumen maximum output
- 75 degree wide beam
- Neutral white tint for better color rendition

SIZE: Length: 165mm (6.5 in.) Tube diameter: 44mm (1.7 in.) Head diameter: 52mm (2 in.)

WEIGHT: 265g (9.3 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	1800 Lumens	1h 30min	242m (Max)	14640cd (Max)	1m	IPX-8, underwater 2m
HIGH	750 Lumens	4h				
MID	250 Lumens	13h 30min				
LOW	25 Lumens	150h				
STROBE	1800 Lumens	/				
SOS	250 Lumens	/				

TK35 Max 900 Lumens

TK35 is a high-intensity multi-functional flashlight. Using CREE XM-L2 U2 LED, it delivers a max 900-lumen output with two 18650 batteries or four CR123A batteries. Offering 4 brightness levels, strobe and SOS function, dual tail switches, TK35 excels in various outdoor activities, such as exploring, camping, searching and caving and more.

- Uses CREE XM-L2 U2 LED, max 900-lumen output
- Powered by 2*18650 or 4*CR123A, durable and high-intensity
- 4 brightness levels and 2 flashing modes, dual switches in the tail cap
- Low-voltage warning function, intelligent memory circuit

SIZE: Length: 165mm (6.5 in.) Tube diameter: 44mm (1.7 in.) Head diameter: 52mm (2 in.)

WEIGHT: 273g (9.6 oz) excluding battery



"Zuniv Award" of the Year 2011



Best in Show Awards in the Outdoor Retailer trade show 2011

ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	900 Lumens	1h 45min	380m (Max)	36100cd (Max)	1m	IPX-8, underwater 2m
HIGH	375 Lumens	5h 30min				
MID	125 Lumens	18h				
LOW	15 Lumens	140h				
STROBE	900 Lumens	/				
SOS	125 Lumens	/				



TK32 Max 900 Lumens

400 meters (437 yards) from a palm-sized light? You are not mistaken. Thanks to the enlarged reflector and Cree XM-L2 U2 LED, the TK32 flashlight transforms one 18650 battery into 400-meter extended reach with 900-lumen output. The light is also equipped with red, green and blue LEDs and the dual tail switch system is all you need to control this multi-color hunting flashlight.

- 400-meter extended reach
- 900-lumen max output
- Integrated red, green and blue LEDs
- Dual tail switch
- Instant access to red light

SIZE: Length: 159mm (6.3 in.) Tube diameter: 25.4mm (1 in.) Head diameter: 52mm (2 in.)

WEIGHT: 180g (6.3 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	900 Lumens	1h 30min	400m (Max)	40000cd (Max)	1m	IPX-8, underwater 2m
HIGH	400 Lumens	3h 45min				
MID	130 Lumens	13h				
LOW	10 Lumens	150h				

TK22 Max 920 Lumens

The Fenix TK22 flashlight boosts the power of a favorite model to 920 lumens to equip law enforcement, rescue and outdoor users for challenging lighting scenarios. One 18650 or two CR123A batteries run long and reach far in a durable package that features a ringless beam pattern.

- Max 920 lumens
- Optimized beam pattern
- Four brightness levels plus strobe mode
- User-friendly interface

SIZE: Length: 147mm (5.8 in.) Diameter: 25.4mm (1 in.) Head: 40mm (1.6 in.)

WEIGHT: 157g (5.5 oz) excluding battery



"Zunlv Award" of the Year 2012

ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	920 Lumens	1h 30min	275m (Max)	18950cd (Max)	1m	IPX-8, underwater 2m
HIGH	400 Lumens	3h 45min				
MID	120 Lumens	15h 45min				
LOW	10 Lumens	150h				
STROBE	920 Lumens	/				

TK15 Max 400 Lumens

Fenix TK15 features a powerful, tough, durable, and fully waterproof design intended for harsh outdoor conditions. Operating on two CR123A Lithium batteries or one 18650 Li-ion battery, the multi-level dimmer function makes a perfect combination of extreme brightness and ultra long runtime. The innovative side dimmer operation is very simple and rapid. Therefore TK15 will be the reliable partner when hunting, searching and rescuing, etc.

- Utilizes Cree XP-G2 (R5) LED , high intensity and energy conservation
- Deep-dish reflector , more powerful focused beam with further lighting distance
- Side dimmer button, 4 brightness levels
- Rapid strobe, momentary-on switch

SIZE: Length: 145mm (5.7 in.) Diameter: 25.4mm (1 in.) Head: 34mm (1.3 in.)

WEIGHT: 125g (4.4 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	400 Lumens	2h	252m (Max)	15900cd (Max)	1m	IPX-8, underwater 2m
HIGH	165 Lumens	6h				
MID	55 Lumens	21h				
LOW	6 Lumens	171h				
STROBE	400 Lumens	/				
SOS	/	/				

TK09 Max 450 Lumens

TK09 features our exclusive Tactical Tap switch which provides instant access to momentary-on, constant-on and output selection. Knurled for easy grip, suitable for rail mounting, the grip ring equipped TK09 excels in demanding situations.

- Tactical Tap Switch
- 450-lumen maximum output
- Three brightness levels
- A full range of tactical accessories

SIZE: Length: 130mm (5.1 in.) Diameter: 25.4mm (1 in.) Head: 34mm (1.3 in.)

WEIGHT: 114g (4 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
HIGH	450 Lumens	2h	230m (Max)	13225cd (Max)	1m	IPX-8, underwater 2m
MID	130 Lumens	7h				
LOW	15 Lumens	65h				



PD-SERIES

Portable and High Intensity Flashlights

Fenix PD Series flashlights provide incredible performance with its exquisite designs and optimum size-to-output ratios. Whether it is for outdoor sports lighting or military and law enforcement, the PD Series models are your reliable partners anytime and anywhere.



PD40 Max 1600 Lumens

PD40 flashlight boasts the best output to weight ratios among Fenix flashlights. Equipped with a powerful Cree MT-G2 LED and powered by one high capacity 26650 rechargeable Li-ion battery, the PD40 puts out a 1600-lumen output with a beam distance of 200 meters from a 14.5cm package and is a new favorite among flasholics and nighttime adventurers.

- Unmatched output to weight ratios
- 1600-lumen burst mode
- Four brightness levels
- Powered by one 26650 battery

SIZE: Length: 145 mm (5.7 in.)
Diameter: 40 mm (1.57 in.)

WEIGHT: 172g (6.06 oz) excluding battery

PD35 Max 960 Lumens

Are compact size and mighty output really mutually exclusive? Not in the case of PD35. Weighing only 87 grams and less than 14 centimeters long, PD35 delivers a stunning 960-lumen maximum output from one 18650 battery. Six outputs including strobe mode cover from daily use to outdoor and professional use while a simple press on the side switch is all you need to select output. Portable becomes powerful with this go-everywhere, category-changing model from Fenix.

- Cree XM-L 2 (U2) LED, max 960 lumens
- Optimum output-to-weight ratios
- Five brightness levels
- Instant strobe

SIZE: Length: 139mm (5.5 in.) Diameter: 25.4mm (1 in.)

WEIGHT: 87g (3.1 oz) excluding battery



New

ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
BURST	1600 Lumens	/	200m (Max)	10000cd (Max)	1m	IPX-8, underwater 2m
HIGH	1000 Lumens	1h 45min				
MID	300 Lumens	8h				
LOW	80 Lumens	30h				
ECO	20 Lumens	120h				



"The Best of Show Award"
AFTA Trade Show 2013

ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	960 Lumens	1h10min	208m (Max)	10800cd (Max)	1m	IPX-8, underwater 2m
HIGH	460 Lumens	3h15min				
MID	180 Lumens	10h				
LOW	50 Lumens	38h				
ECO	14 Lumens	150h				
STROBE	960 Lumens	/				



PD32 Max 340 Lumens

Fenix PD32 is a compact versatile flashlight. Featuring 4 brightness levels, plus Strobe and SOS, PD32 delivers a max 340-lumen output with one 18650 battery or two CR123A batteries. Featuring constant brightness technology, user friendly interface for output selection and waterproof to IPX-8 standard, PD32 is an excellent flashlight for outdoor activities and every day carry.

- Uses Cree XP-G2 (R5) LED
- Side switch for selecting the 4 brightness levels
- Strobe by one press of side switch, momentary-on function from tail cap switch
- Compatible with 2*CR123A/1*18650 battery

SIZE: Length: 127mm (5 in.) Diameter: 24mm (0.9 in.)

WEIGHT: 65g (2.3 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	340 Lumens	2h 30min	154m (Max)	5950cd (Max)	1m	IPX-8, underwater 2m
HIGH	135 Lumens	8h 15min				
MID	70 Lumens	16h 30min				
LOW	5 Lumens	245h				
STROBE	340 Lumens	/				
SOS	135 Lumens	/				

PD22 Max 210 Lumens

Fenix PD22 is a small-footprint flashlight with wide-ranging functionality. Four brightness levels and two flashing modes, along with a side mode switch, provide total lighting control. Compact, lightweight and waterproof to IPX-8 standard, PD22 is an excellent choice for your outdoor illumination or every day carry.

- Uses Cree XP-G2 (R5) LED
- Side mode button switch, 4 brightness levels
- Rapid strobe, hidden SOS

SIZE: Length: 89mm (3.5 in.) Diameter: 21.5mm (0.8 in.)

WEIGHT: 44g (1.6 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	210 Lumens	2h	113m (Max)	3200cd (Max)	1m	IPX-8, underwater 2m
HIGH	105 Lumens	5h				
MID	45 Lumens	12h 30min				
LOW	3 Lumens	120h				
STROBE	210 Lumens	/				
SOS	105 Lumens	/				

PD12 Max 360 Lumens

The Fenix PD12 Flashlight generates 360 lumens max output in a go-anywhere size. Three brightness levels and a burst mode are controlled by the waterproof side switch. Reliable, durable and ANSI-rated, the single CR123A battery powered Fenix PD12 puts power where it counts.

- Optimum output-to-weight ratios
- Neutral white LED for better color rendition
- Instant Burst mode
- All-function side switch

SIZE: Length: 81mm (3.2 in.) Diameter: 25.4mm (1 in.)

WEIGHT: 48-gram (excluding battery)



ISPO Award Winner 2014

ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
BURST	360 Lumens	/	120m (Max)	3600cd (Max)	1m	IPX-8, underwater 2m
HIGH	200 Lumens	2h 30min				
MID	80 Lumens	6h 30min				
LOW	10 Lumens	60h				



LD-SERIES

Professional Outdoor Flashlights

Oriented towards the outdoor professionals, Fenix develops its LD Series flashlights with exquisite and compact design, which can lessen the volume and reduce the weight to the largest extent. With various output levels and flashing function, the Fenix LD models can satisfy your various lighting needs in outdoor sports environments, making them to be the quality lighting devices for highly difficult professional outdoor sports activities.

LD75 Max 4200 Lumens

Extreme outputs, compact size plus multi-colored LED, the LD75 flashlight is a new favorite among hunters, outdoorsmen and flasholics all over the world. LD75 puts 4200-lumen output with 490-meter throw inside a package that is less than 16 centimeters long, and can be stowed easily in a backpack, glove compartment, or tool case. The light also features five brightness levels and instant strobe and instant turbo.

- 4200-lumen output with 490-meter throw
- Powerful additional multi-colored LED
- Instant strobe and instant turbo.
- Five brightness levels

SIZE: Length: 158 mm (6.22 in.) Body Diameter: 52 mm (2.04in.) Head Diameter: 74 mm (2.91in.)

WEIGHT: 430g (15.16 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	4000 Lumens	1h 30min	490m (Max)	60000cd (Max)	1m	IPX-8, underwater 2m
HIGH	1800 Lumens	3h				
MID	600 Lumens	11h				
LOW	200 Lumens	35h				
STROBE	20 Lumens	220h				
CET Multi-colored LED	SOS	4000 Lumens	/			
	RED	140 Lumens	/			
	GREEN	190 Lumens	/			
	BLUE	45 Lumens	/			
	WHITE	200 Lumens	/			

LD60 Max 2800 Lumens

The Fenix LD60 outdoor flashlight provides unmatched performance and flexibility with three light sources. Thanks to the separate circuit design, the LD60 works well even when one or two LEDs are compromised. Utilizing three Cree XM-L2 LEDs, the LD60 offers 2800-lumen max output while a single press on the side switch is all you need for output selection and instant strobe.

- 2800-lumen max output
- Triple LEDs with separate circuit design
- Compact construction
- Intuitive one-button operation

SIZE: Length: 155mm(6.1 in.) Head diameter: 63mm(2.5 in.) Tube diameter: 46mm(1.8 in.)

WEIGHT: 364g(12.8 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	2800 Lumens	1h 30min	460m (Max)	53000cd (Max)	1m	IPX-8, underwater 2m
HIGH	1500 Lumens	3h				
MID	500 Lumens	9h				
LOW	160 Lumens	29h				
ECO	30 Lumens	150h				
STROBE	2800 Lumens	/				



LD50 Max 1800 Lumens

The ultra compact LD50 outdoor flashlight provides unmatched flexibility and reliability. It can be powered by either one or two 18650 batteries. The side-by-side reflector plus separate circuit design make the light usable even when one of the LEDs is compromised. The ultra flat body and built-in belt clip make it comfortable to hold and easy to carry. Utilizing two CREE XM-L2 LEDs, LD50 offers 1800-lumen output, five bright levels and instant strobe function.

- Ultra compact flat body
- Dual LEDs with dedicated circuit
- 1800-lumen maximum output
- Five brightness levels
- Instant strobe

SIZE: Length: 138 mm (5.43 in.) Width: 53 mm (2.08 in.) Height: 27 mm (1.06 in.)

WEIGHT: 60-gram (excluding battery)

LD41 2015 Edition

Max 960 Lumens

Featuring max 960-lumen output, LD41 2015 edition provides four brightness levels plus strobe and SOS modes. With intelligent circuit, rugged metal housing and IPX-8 rating, this reliable light is suitable for searching, camping, caving and more.

- 960-lumen output with 300-meter beam distance
- Compact and flat body design
- 4 brightness levels plus strobe and SOS
- Dual tail switch with momentary-on function

SIZE: Length: 175mm (6.9 in.)
Diameter: 40mm (1.6 in.)


WEIGHT: 190-gram (6.7 oz) excluding batteries



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	1800 Lumens	1h 35min	270m (Max)	18500cd (Max)	1m	IPX-8, underwater 2m
HIGH	750 Lumens	4h				
MID	350 Lumens	10h				
LOW	140 Lumens	25h				
ECO	25 Lumens	150h				
STROBE	1800 Lumens	/				



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	960 Lumens	1h	300m (Max)	22500cd (Max)	1m	IPX-8, underwater 2m
HIGH	400 Lumens	2h 25min				
MID	150 Lumens	9h 30min				
LOW	6 Lumens	200h				
STROBE	960 Lumens	/				
SOS	150 Lumens	/				

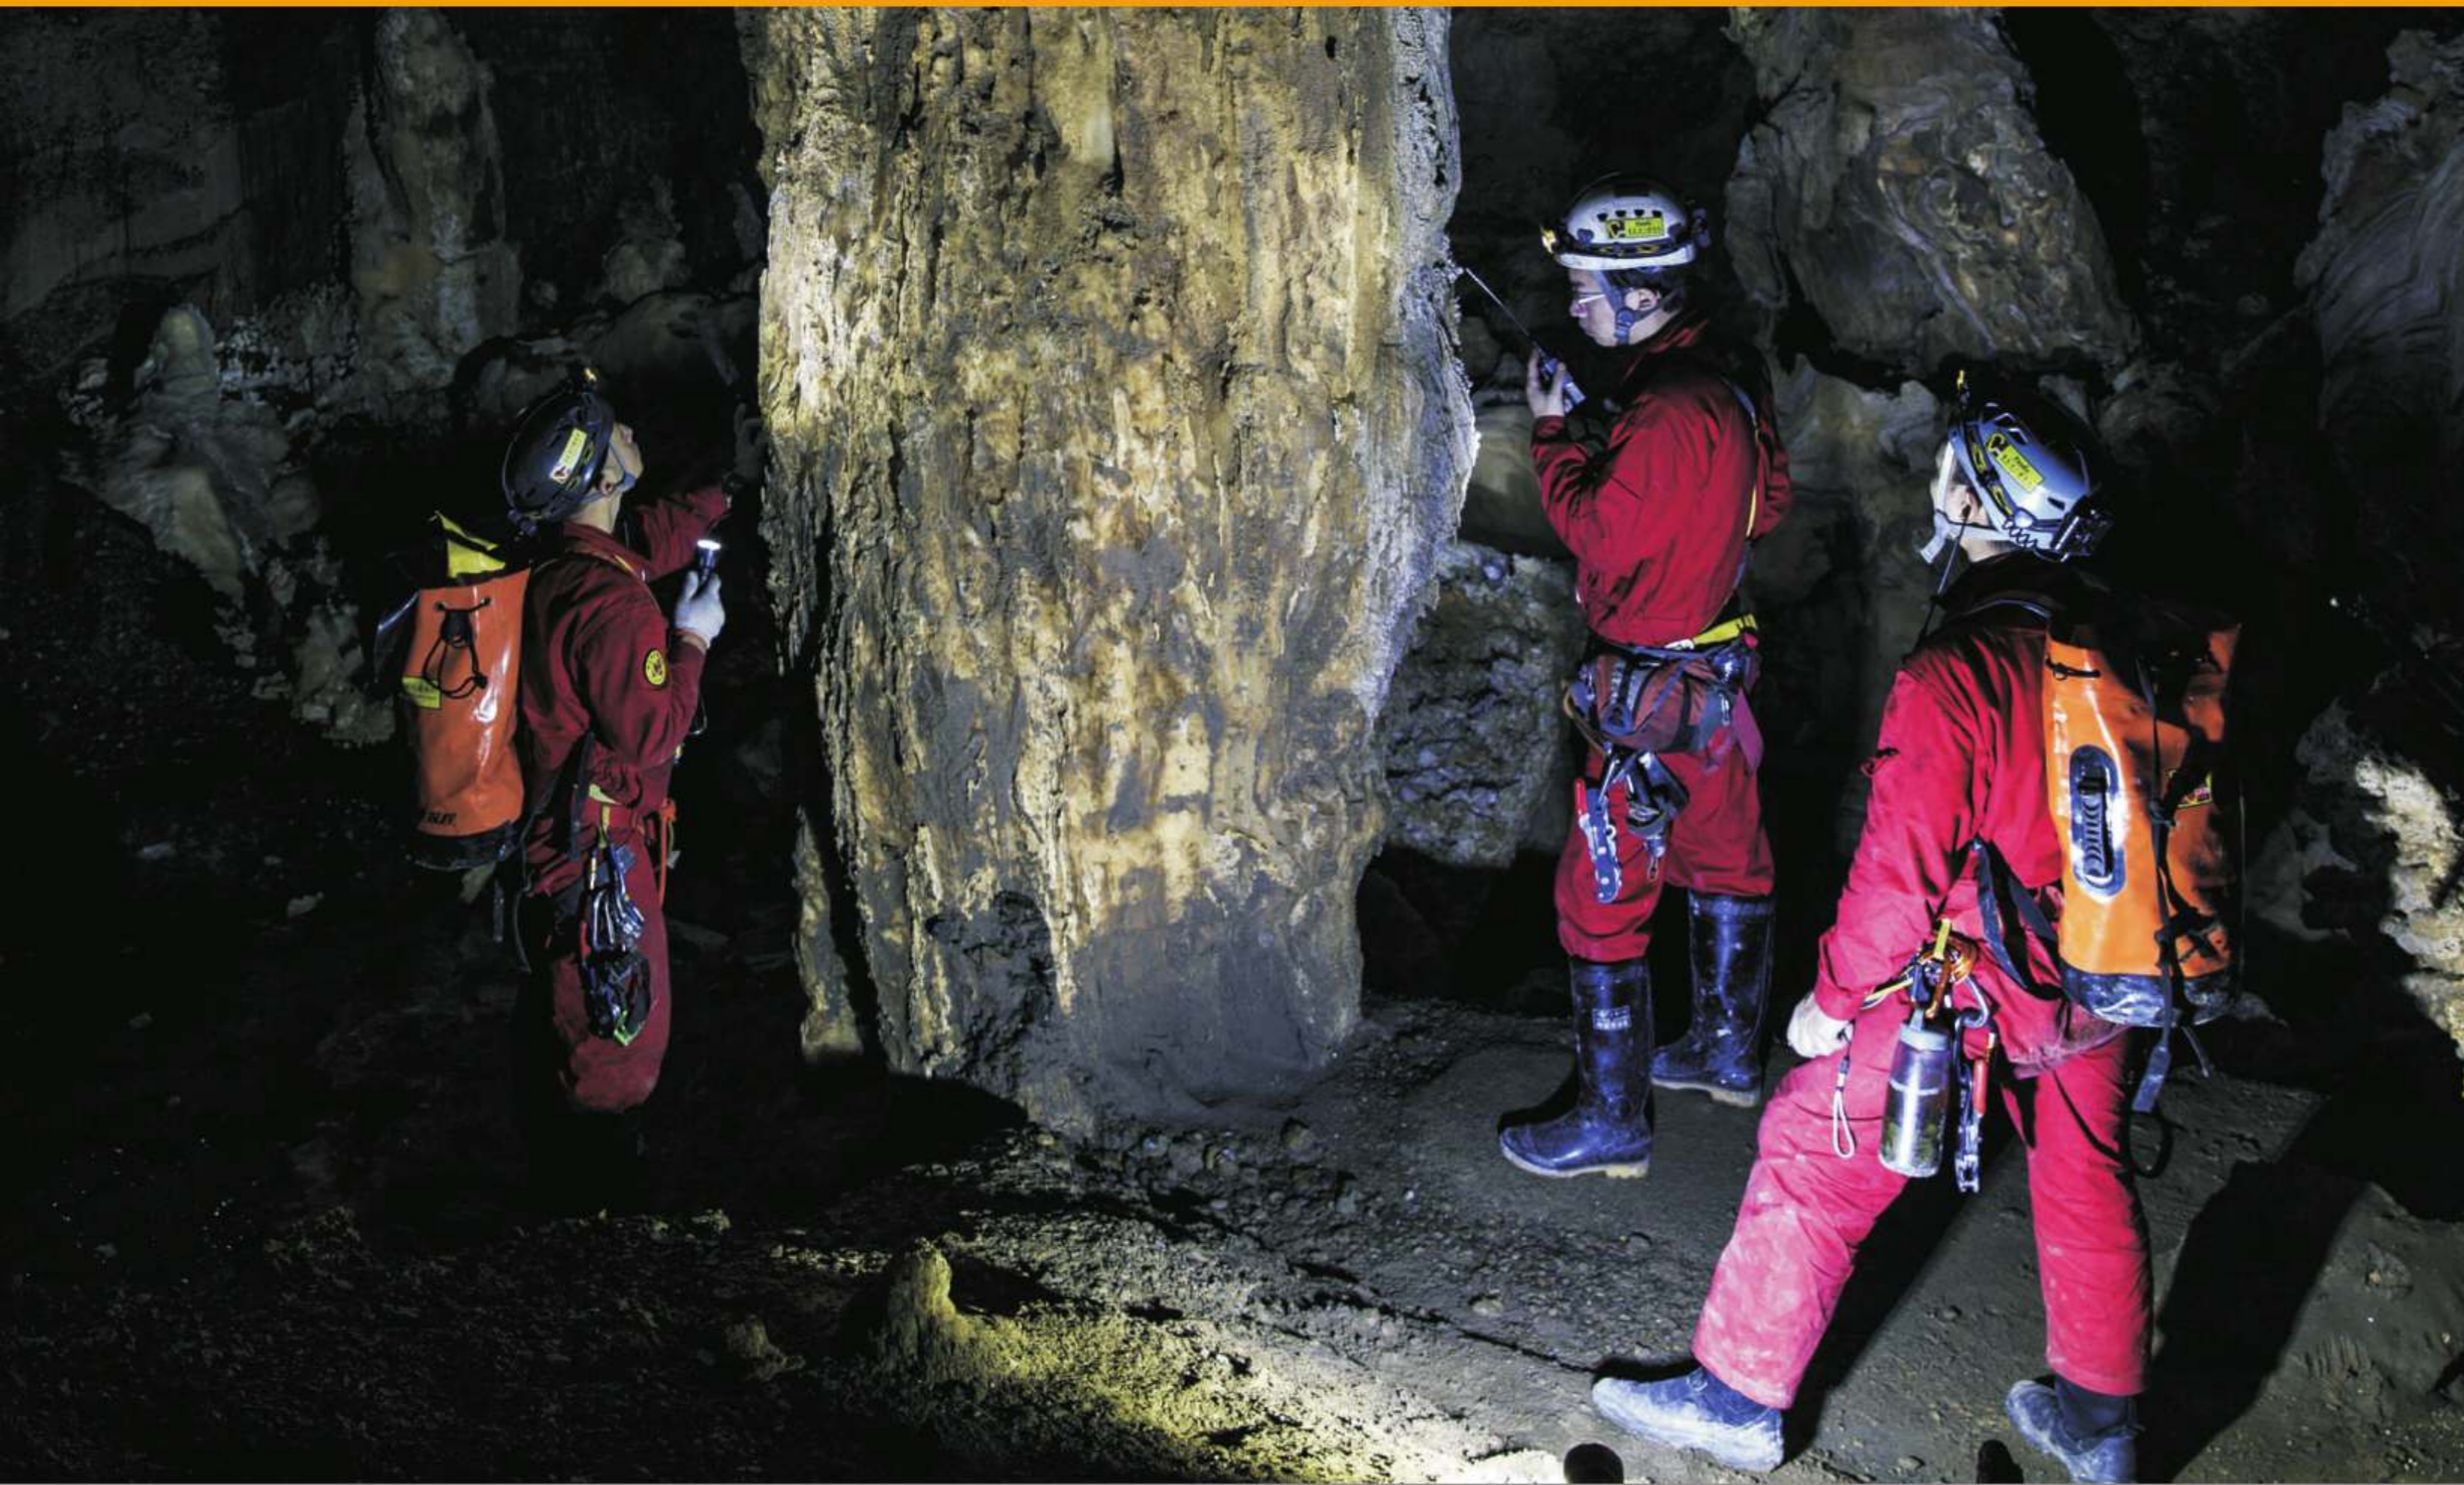

LD22 Max 215 Lumens

Fenix LD22 is a widely-used all-round champion in outdoor lighting. Offering 4 brightness levels and 2 different flashing functions, it can operate simply via the side mode switch. It makes a perfect combination between the various needs in different brightness levels and runtime in any condition. With the universal AA batteries, featuring the exquisite and compact design, advanced constant technology, waterproofing to IPX-8 Standard, LD22 must be your good partner to meet various needs in the outdoor conditions and in urgent condition, such as camping, hiking, climbing, caving, etc.

- Uses Cree XP-G2 (R5) LED
- Side mode button switch, 4 brightness levels
- Rapid strobe, hidden SOS

SIZE: Length: 156mm (6.1 in.) Diameter: 21.5mm (0.8 in.)

WEIGHT: 60g (2.1 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	215 Lumens	2h 30min	113m (Max)	3200cd (Max)	1m	IPX-8, underwater 2m
HIGH	105 Lumens	6h				
MID	50 Lumens	14h 30min				
LOW	3 Lumens	150h				
STROBE	215 Lumens	/				
SOS	105 Lumens	/				

LD12 Max 125 Lumens

Fenix LD12 is a flashlight with side mode switch. It offers 4 brightness levels, Strobe and SOS. Using only one AA battery, it delivers a max 125-lumen output and a max 100-hour long runtime! Featuring the exquisite and compact design, user-friendly interface and waterproofing to IPX-8 Standard, Fenix LD12 is extremely suitable for hiking, camping and EDC.

- Uses Cree XP-G2 (R5) LED
- Side mode button switch, 4 brightness levels
- Rapid strobe, hidden SOS

SIZE: Length: 105mm (4.1 in.) Diameter: 21.5mm (0.8 in.)

WEIGHT: 54g (1.9 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	125 Lumens	2h 20min	87m (Max)	1925cd (Max)	1m	IPX-8, underwater 2m
HIGH	65 Lumens	4h 45min				
MID	30 Lumens	10h 15min				
LOW	3 Lumens	100h				
STROBE	125 Lumens	/				
SOS	65 Lumens	/				

LD09 Max 130 Lumens

Equipped with the multi-function tail switch for momentary-on, constant-on and output selection, the Fenix LD09 delivers max 130-lumen output from a single AA cell. Three brightness levels plus SOS function cover from hiking, camping to emergency situations.

- Compact design with reliable output
- Three brightness levels plus SOS function
- Multi-function tail switch
- Powered by one AA battery

SIZE: Length: 92mm (3.6 in.) Diameter: 19mm (0.7 in.)

WEIGHT: 33g (1.2 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	130 Lumens	1h 30min	56min	95m (Max)	2250cd (Max)	1m	IPX-8, underwater 2m
MID	55 Lumens	5h	3h				
LOW	8 Lumens	40h	50h				
SOS	55 Lumens	/	/				

LD02 Max 100 Lumens

Small but mighty, the LD02 flashlight offers up to 100-lumen of light with a 45-meter range all in a tiny 7.6-centimeter package that fits in your pocket or on your keychain. Designed to provide instant lighting wherever and whenever you need it, the LD02 provides three brightness levels to strike a balance between high output and extended runtime.

- Exquisite and high intensity
- Broad beam lens
- 3 brightness levels
- Push-button tail cap switch
- Powered by one AAA battery

SIZE: Length: 76mm (3 in.) Diameter: 15mm (0.6 in.)

WEIGHT: 16g (0.6 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	100 Lumens	45min	30min	45m (Max)	505cd (Max)	1m	IPX-8, underwater 2m
MID	25 Lumens	4h 15min	4h 15min				
LOW	8 Lumens	14h 30min	15h				

E-SERIES

Outdoor Flashlights

Adhering to the design concept of “Every Day Carry + Easy to Use”, Fenix develops its E Series outdoor sports flashlights. Featuring simple and practical output levels, easy and fast operation, plus its highly reliable design such as waterproofness and impact-resistance, the Fenix E-series models are your indispensable lighting devices for outdoor sports activities and EDC.

E41 Max 1000 Lumens

E41 is the pocket-sized searchlight you have been searching for. Thanks to the unibody casing and side by side battery compartment, the 11.6cm E41 packs four widely available AA batteries with a Cree XM-L2 U2 LED to blast 1000-lumen output and 275-meter beam distance. Featuring three brightness levels plus burst mode, E41 is a go-to gear for S&R professionals and outdoor enthusiasts.

- Compact unibody design
- 1000-lumen burst mode
- Three brightness levels
- Powered by four AA batteries

SIZE: Length: 116 mm (4.56 in.) Body Diameter: 40 mm (1.57 in.) Head Diameter: 44 mm (1.73 in.)

WEIGHT: 204g (7.2 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	400 Lumens	2h 30min	4h 15min	275m (Max)	18900cd (Max)	1m	IPX-8, underwater 2m
MID	140 Lumens	11h	13h 20min				
LOW	20 Lumens	80h	95h				
BURST	1000 Lumens	/	/				

E35 Ultimate Edition Max 900 Lumens

From 900 lumen burst mode to the energy-conserving low mode (10 lumens), the E35 outdoor flashlight gives you total control over output and runtime. When the rechargeable option for the 18650 battery is not available, this dual-fuel capable light also works with primary lithium battery (CR123A). When it comes to user interface, the all-function side switch is all you need for ON/OFF, output selection and instant burst.

- Utilizes Cree XM-L2 (U2) LED
- 900-lumen burst mode
- Three brightness levels
- All-function side switch
- Dual-fuel capable

SIZE: Length: 130mm (5.1 in.) Diameter: 24mm (0.9 in.)

WEIGHT: 72g (2.5 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
MID	120 Lumens	11h				
LOW	10 Lumens	140h				
BURST	900 Lumens	/				
SOS	/	/				

E25 Max 260 Lumens

Fenix E25 is a compact, versatile outdoor flashlight. The all-function switch on the head gives you total control of the light. Activating the light or choosing an ideal output is simple and intuitive. Powered by 2 readily available AA batteries, E25 delivers a max 260-lumen burst mode and 72 hours runtime on low mode.

- Utilizes Cree XP-E2 LED
- 260-lumen burst mode
- Three brightness levels
- All-function side switch

SIZE: Length: 146mm (5.7 in.) Diameter: 24mm (0.9 in.)

WEIGHT: 73g (2.6 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	130 Lumens	3h 30min	1h 45min	180m (Max)	8100cd (Max)	1m	IPX-8, underwater 2m
MID	55 Lumens	10h	8h 15min				
LOW	8 Lumens	72h	72h				
BURST	260 Lumens	/	/				
SOS	/	/	/				

E20 Max 250 Lumens

The Fenix E20 flashlight ramps up to 250-lumen output with convenient shake-to-shift brightness control. Powered by two AA batteries, this 2-meter submersible light reaches 208m with alkaline battery back-up capability.

- Shake-to-shift brightness control
- Tactical tail switch
- Max 250 lumens
- Powered by AA batteries

SIZE: Length: 160mm (6.3 in.) Diameter: 26mm (1 in.)

WEIGHT: 94g (3.3 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	250 Lumens	1h 24min	35min	208m (Max)	10800cd (Max)	1m	IPX-8, underwater 2m
MID	125 Lumens	4h 45min	2h 40min				
LOW	10 Lumens	60h	80h				

E15 Max 170 Lumens

Fenix E15 is an extremely powerful mini light. Powered by one CR123A battery, the thumb-like flashlight can offer max 170 lumens! Using the high-intensity total reflection lens, the flood light is soft and bright which is good for illumination at close range. It must be suitable for EDC with the 23-gram weight and 3 brightness levels.


- Extremely compact
- Max 170-lumen output
- 3 brightness levels

SIZE: Length: 59.6mm (2.3 in.) Diameter: 19.7mm (0.8 in.)

WEIGHT: 23g (0.8 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	170 Lumens	1h 51min		102m (Max)	2593cd (Max)	1m	IPX-8, underwater 2m
MID	80 Lumens	4h 33min					
LOW	11 Lumens	36h					
STROBE	/	/					
SOS	/	/					

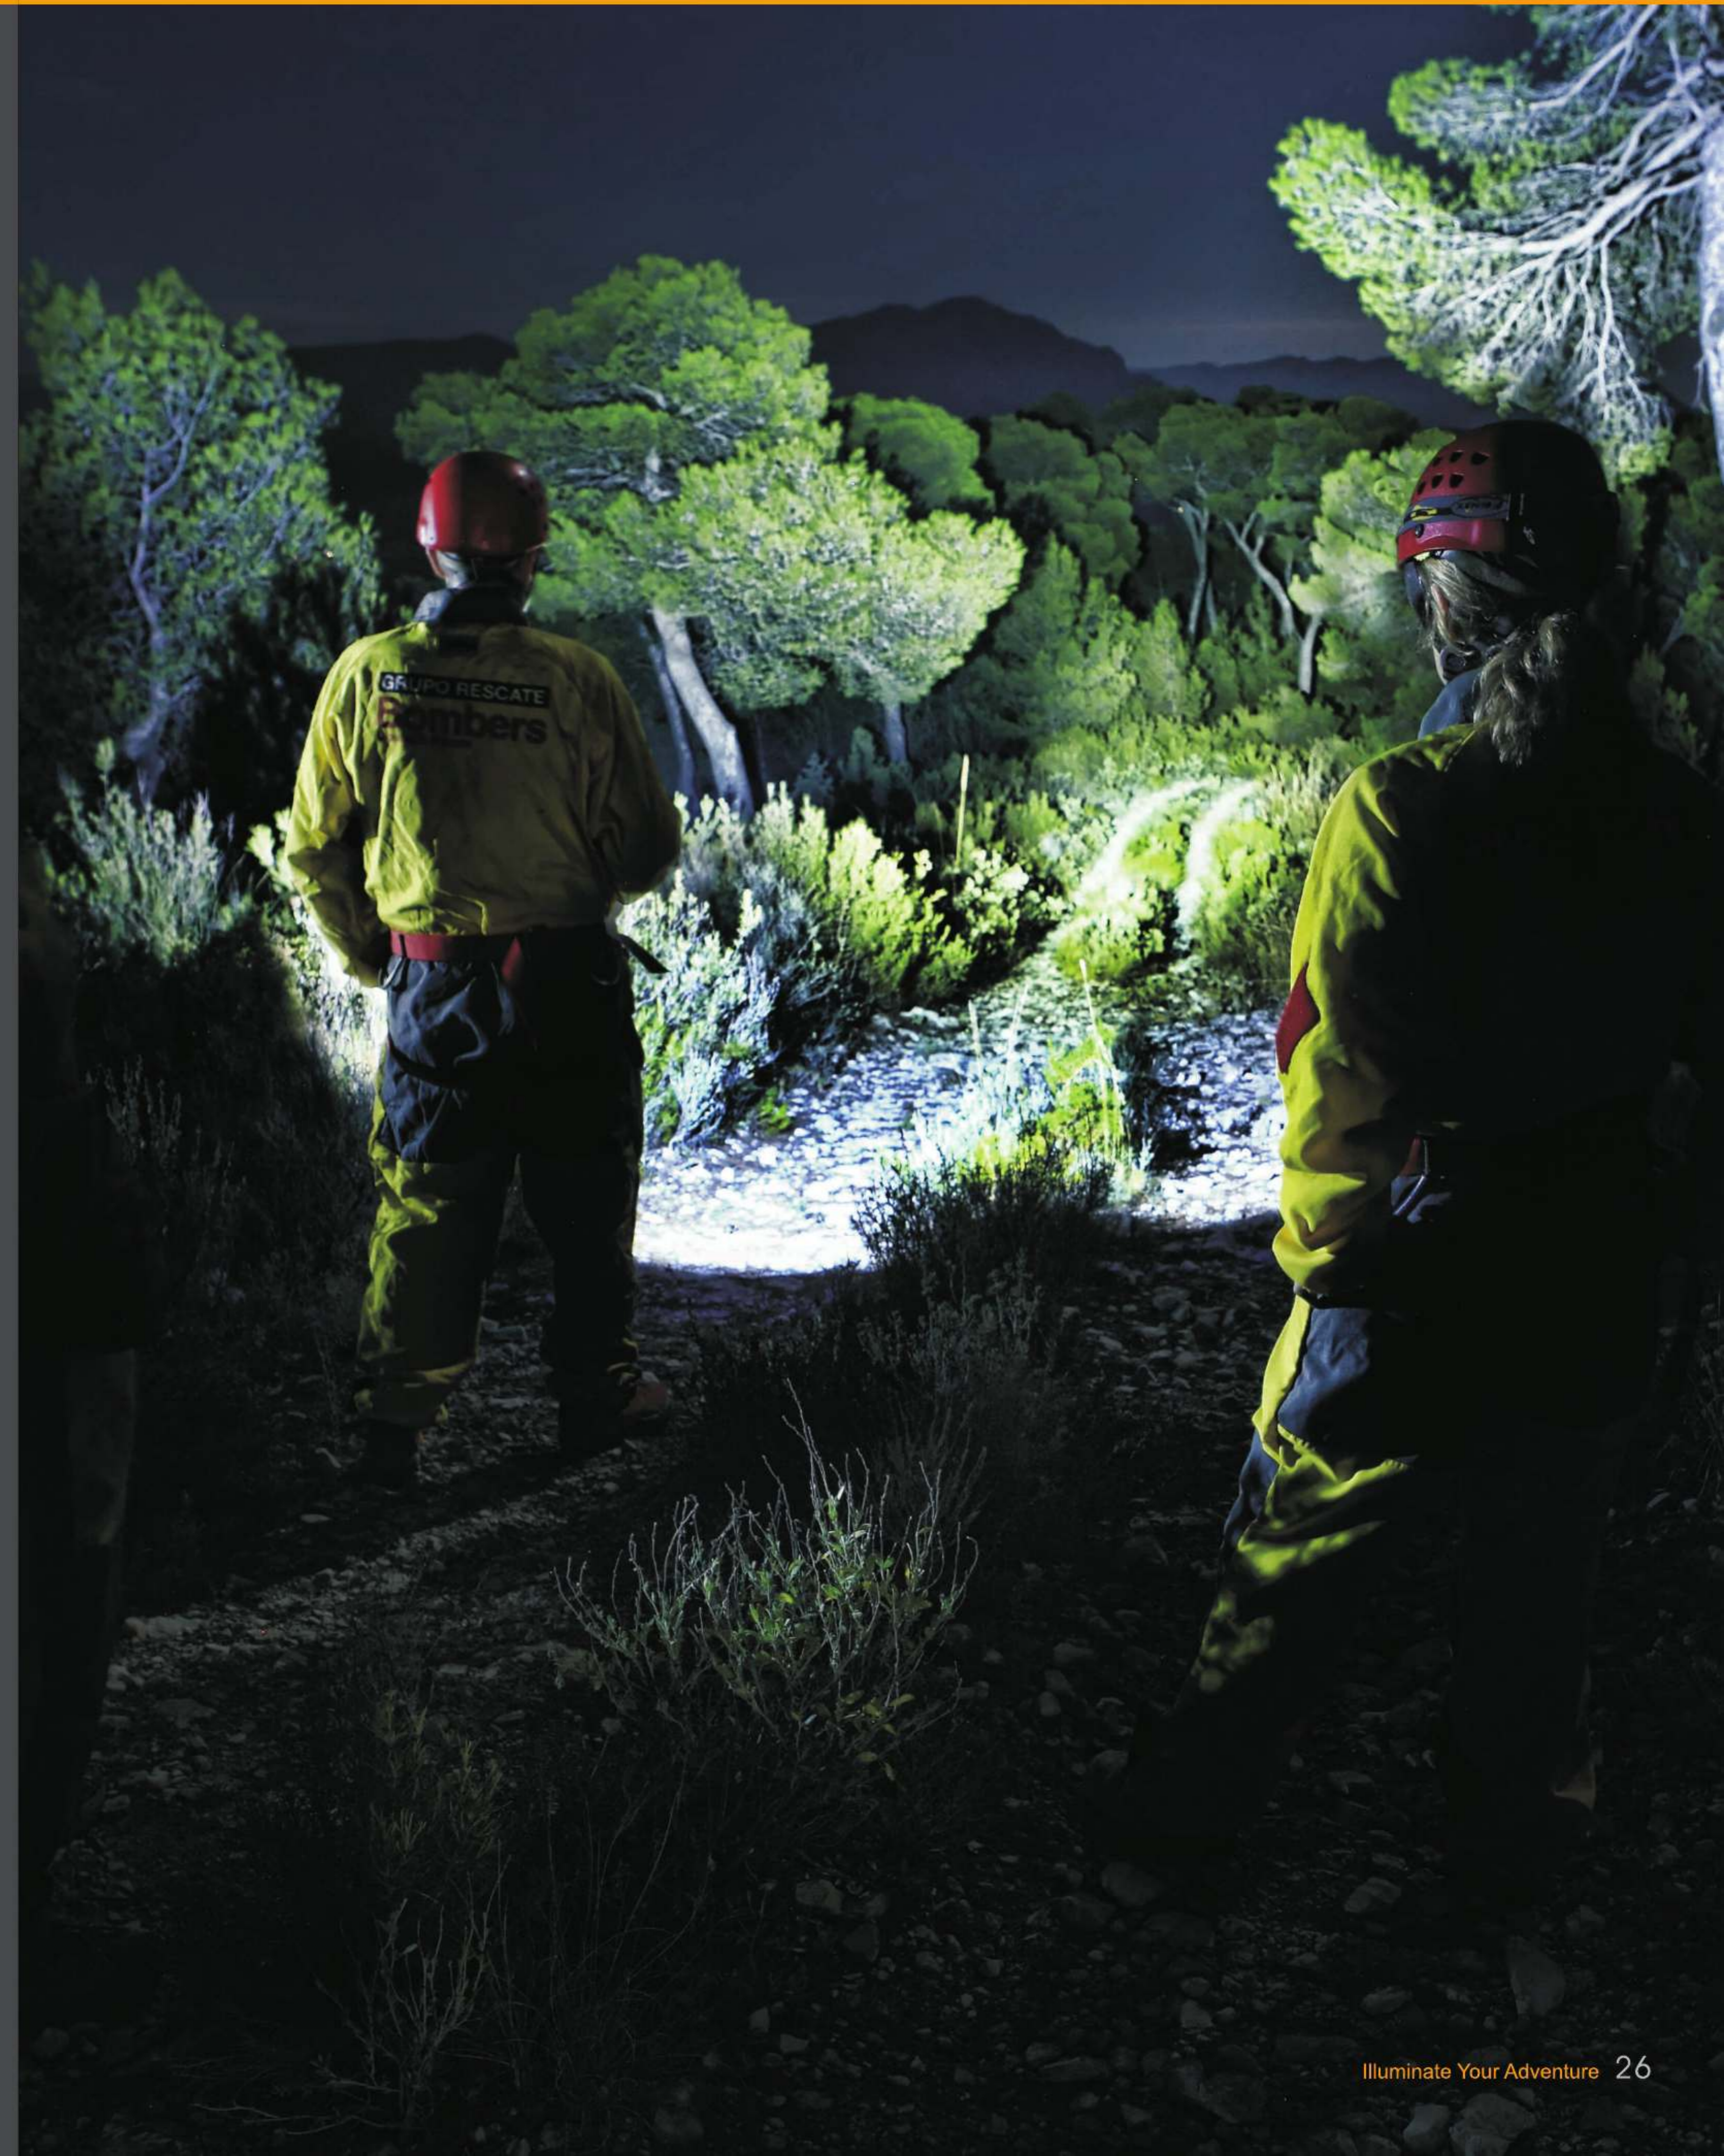

E05

Max 85 Lumens

The Fenix E05 flashlight turns AAA-tiny into useful personal lighting with 85 lumens max output. Simple twist operation manages three brightness levels in this 6.6cm flashlight. Durable aircraft-grade aluminum construction and a broad beam lens are ready for action at a moment's notice.

- Optimum output-to-weight ratios, max 85 lumens
- Broad beam lens
- Three brightness levels
- Twist switch
- Powered by one AAA battery

SIZE: Length: 66.5mm (2.6 in.) Diameter: 15mm (0.6 in.)

WEIGHT: 12.5g (0.4 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	85 Lumens	1h	45min	45m (Max)	505cd (Max)	1m	IPX-8, underwater 2m
MID	25 Lumens	4h 15min	4h 15min				
LOW	8 Lumens	14h 30min	15h				

E05SS

Max 85 Lumens

The Fenix E05SS (Stainless Steel) flashlight turns AAA-tiny into useful personal lighting with 85 lumens max output. Simple twist switch operation manages three brightness levels in this 6.6cm flashlight. Stylish stainless steel construction and a broad beam lens are ready for action at a moment's notice.

- Stainless steel construction
- Ultra-compact and high intensity
- Broad beam lens
- 3 brightness levels
- Twist switch

SIZE: Length: 66.5mm (2.6 in.) Diameter: 15mm (0.6 in.)

WEIGHT: 32g (1.1 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	85 Lumens	1h	45min	45m (Max)	505cd (Max)	1m	IPX-8, underwater 2m
MID	25 Lumens	4h 15min	4h 15min				
LOW	8 Lumens	14h 30min	15h				

E01

Max 13 Lumens

Fenix E01 is a portable mini LED flashlight. Featuring the compactness, long runtime and constant brightness, plus with the amazing reliability, durability and water resistance, it is deeply loved by the public. E01 will be your best choice for EDC, gift or souvenir, etc.

- Utilizes a Nichia white GS LED with a lifespan of 100,000 hours
- Constant current circuit design


SIZE: Length: 71mm (2.8 in.) Diameter: 14.2mm (0.6 in.)

WEIGHT: 14g (0.5 oz) excluding battery



ANSI/NEMA FL 1						
OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF	
13 Lumens	16h 30min	21m	115cd	1m	IPX-8, underwater 2m	

Photo credited by Adam Haydock

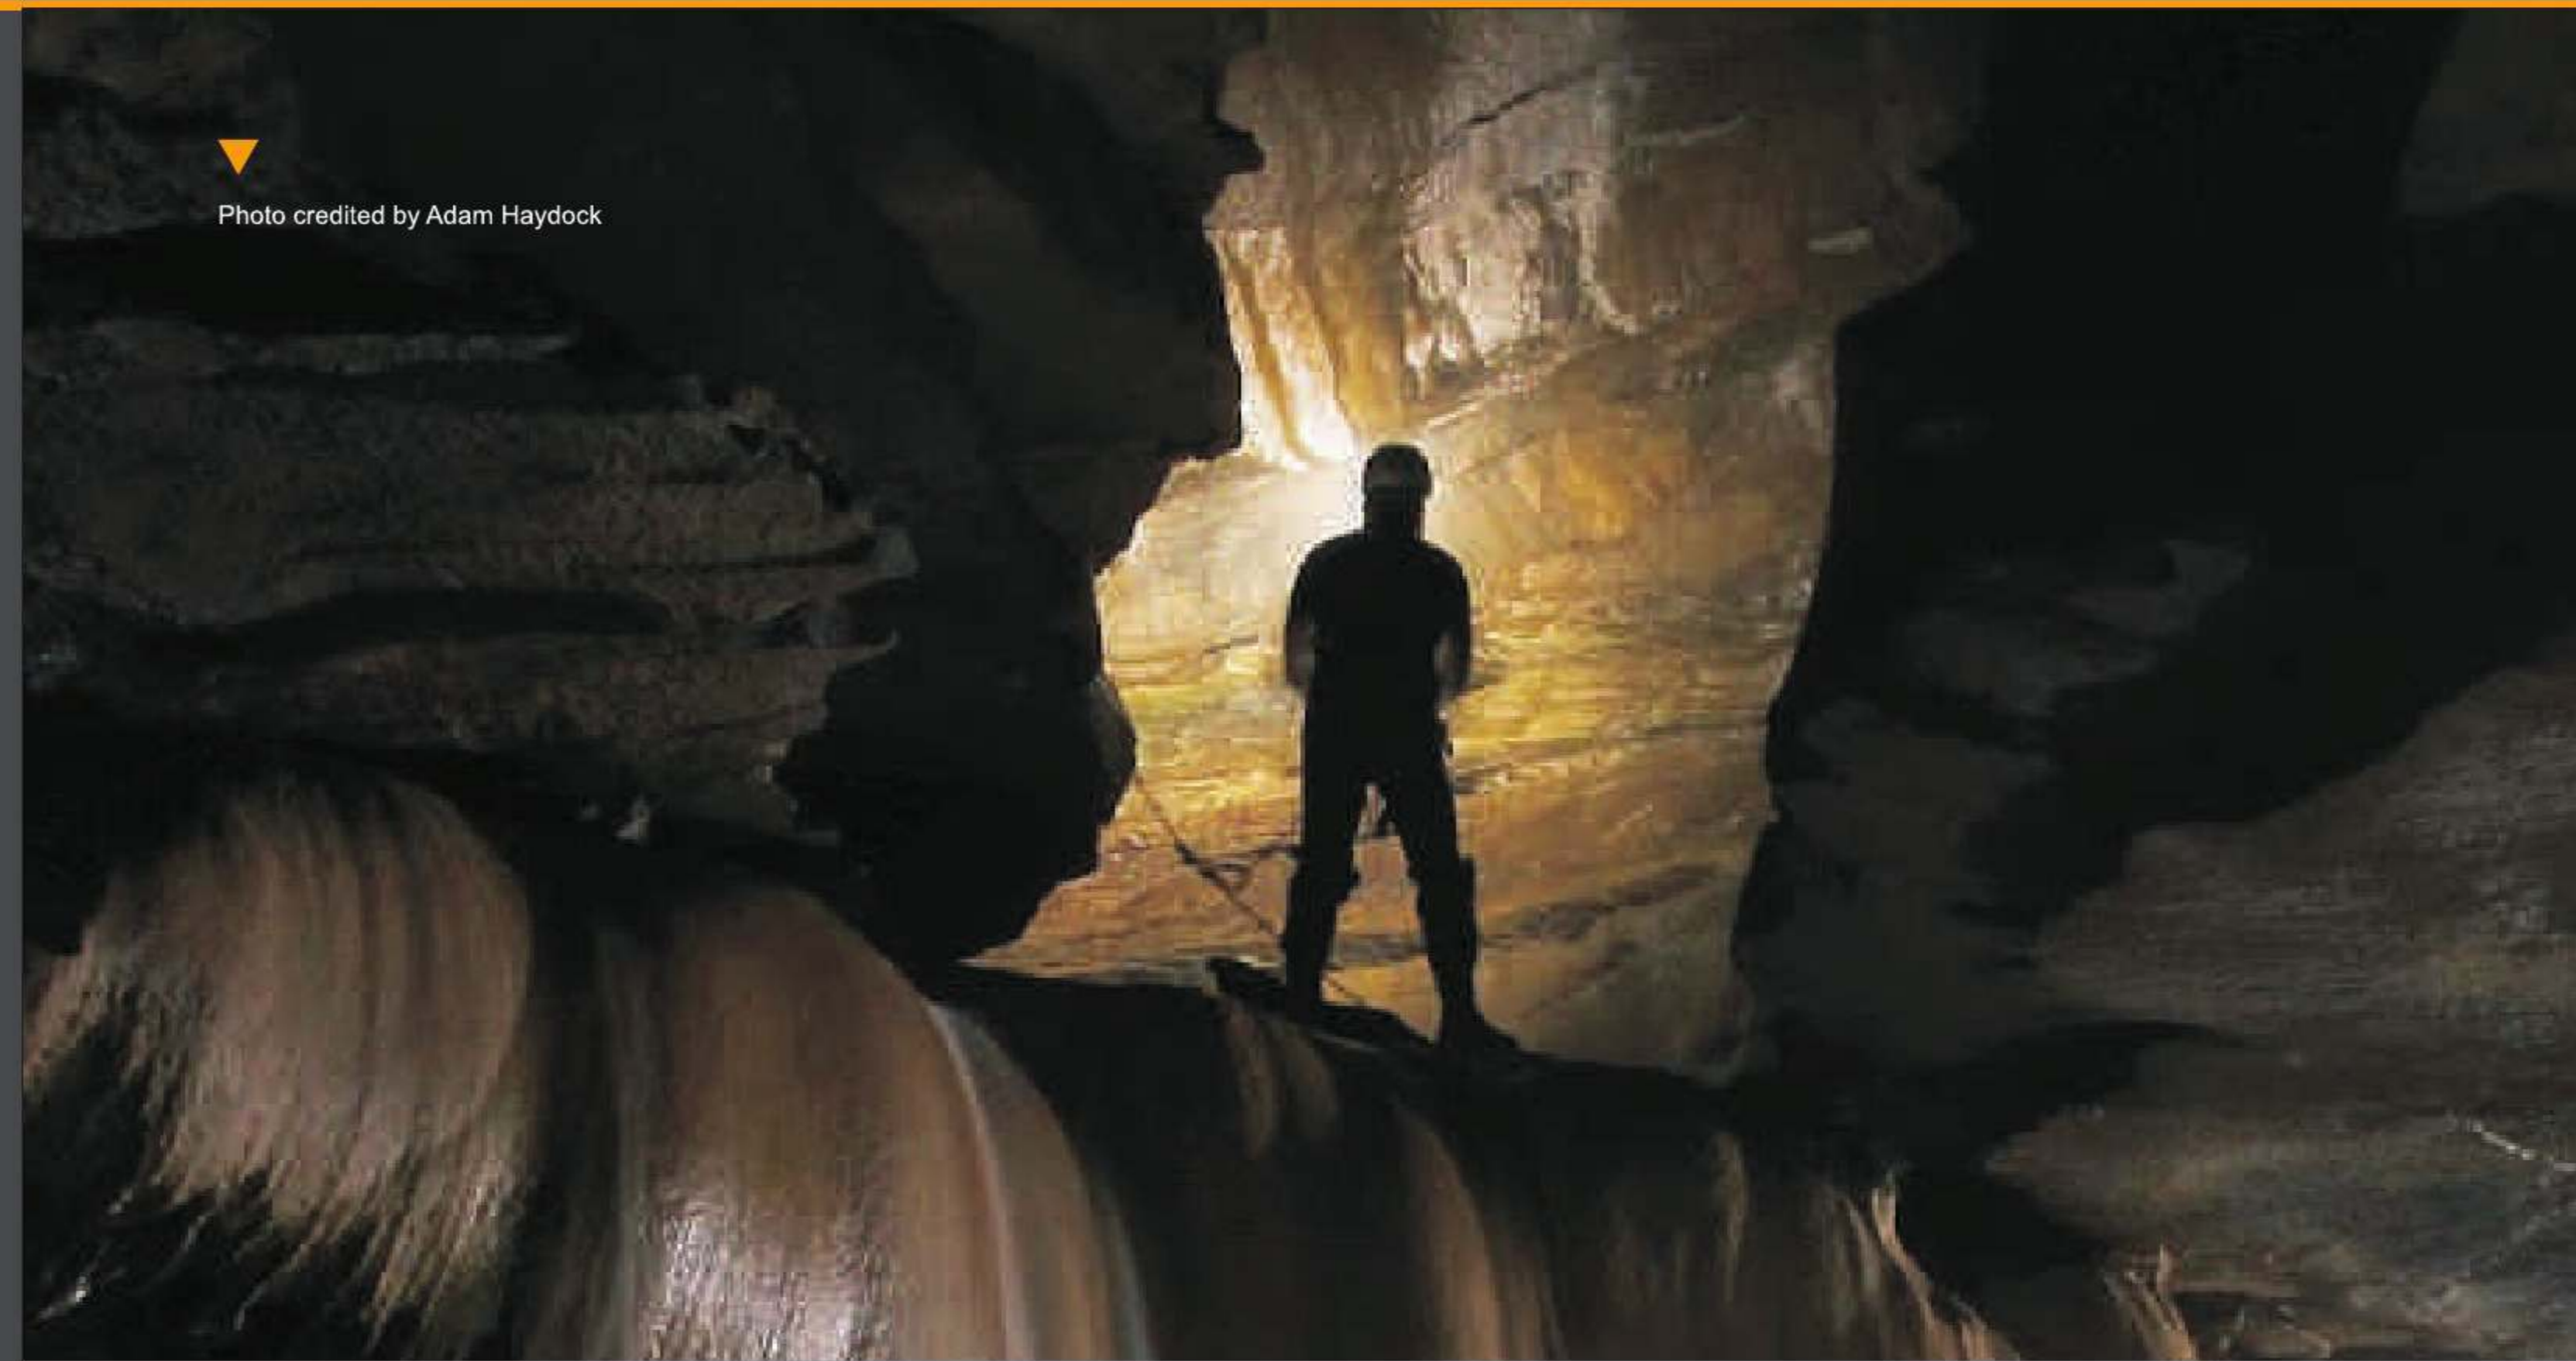

E12

Max 130 Lumens

E12 is a compact keychain flashlight. Powered by one AA battery, the light blasts a 130-lumen maximum output and 40 hours runtime on low mode. Activating the light or choosing an ideal output is simple and intuitive. Fully press the tail cap for constant-on, tap it for output selection.

- Three brightness level
- Tail tap switch
- Intelligent memory circuit

SIZE: Length: 90mm (3.5 in.) Diameter: 19mm (0.7 in.)

WEIGHT: 28.5g (1 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
HIGH	130 Lumens	1h 30min	88m (Max)	1936cd (Max)	1m	IPX-8, underwater 2m
MID	50 Lumens	6h 30min				
LOW	8 Lumens	40h				

Photo credited by Icebird_lulu



SD10 Max 930 Lumens

The SD10 utilizes motion control technology to simplify the user-interface of diving lights. A simple shake of the light is all you need for output selection while the twisty ON/OFF switch is locked to prevent possible flooding by over turning. Powered by one 18650 battery, this 100-meter submersible light puts out 930-lumen output with 300-meter beam distance.

- 100-meter submersible
- High intensity with extended reach
- Neutral white tint for better color rendition
- Shake-to-shift brightness control

SIZE: Length: 144mm (5.7 in.) Diameter: 26mm (1 in.) Head diameter: 40mm (1.6 in.)

WEIGHT: 160g (5.6 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
HIGH	930 Lumens	1h 30min	300m (Max)	22500cd (Max)	1m	100-meter submersible
MID	385 Lumens	4h				
LOW	110 Lumens	14h				

MC11 Max 155 Lumens

The category-defying MC11 angle light is a favorite among trade professionals and recreational users. You can clip it to most anything, hung it via a lanyard or the built-in D-ring, tail stand it and adjust the head to put the light where you need it. Powered by one AA battery, the light produces a 155-lumen burst mode and 90 hours runtime on low mode.

- Spot-on flexibility
- 90°adjustable head 180°adjustable body
- 155-lumen burst mode
- Three brightness levels

SIZE: Length: 99mm (3.9 in.) Diameter: 21.5mm (0.8 in.) Head diameter: 25mm (1 in.)

WEIGHT: 64.8g (2.3 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
HIGH	105 Lumens	2h15min	75m (Max)	1410cd (Max)	1m	IPX-8, underwater 2m
MID	50 Lumens	6h				
LOW	3 Lumens	90h				
BURST	155 Lumens	/				

RC/UC-SERIES

Powerful, Reliable, Rechargeable

Taking advantage of environmental-friendliness and low using cost, Fenix rechargeable flashlights are quick to regain power using the built-in rechargeable Li-ion battery and draw strength from USB charging, stationary AC and on-board vehicle charging stations. The charging operation is quite simple and convenient. Featuring tough, reliable and fully-waterproof design, the Fenix rechargeable flashlights are your best choice for military and law enforcement, hunting, searching, rescuing, etc.

RC40 Max 3500 Lumens

RC40 features our exclusive RAPID SCAN BEAM to deliver an excellent combination of throw and overall coverage. A stunning 3500-lumen output is transformed into a 710-meter throw for long range identification and a 90 degree wide beam for maximum close-range coverage. Combined with advanced power solutions which enable extended periods of runtime for long-running task lighting, RC40 is THE CHOICE for field operations and more.

- RAPID SCAN BEAM
- Advanced power solutions
- Instant strobe
- Five brightness levels

SIZE: Length: 299mm (11.8 in.) Diameter: 54mm (2.1 in.) Head diameter: 108mm (4.3 in.)

WEIGHT: 1310g (46.2 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	3500 Lumens	1h 30min	710m (Max)	126000cd (Max)	1m	IPX-8, underwater 2m
HIGH	1500 Lumens	5h				
MID	550 Lumens	15h				
LOW	150 Lumens	50h				
ECO	35 Lumens	160h				
STROBE	3500 Lumens	/				
SOS	/	/				

RC15 Max 860 Lumens

Fenix RC15 is a top pick for rechargeable flashlight performance. With 860-lumen max output, RC15 offers useful working levels down to 9 lumens. Exceptional runtime combines with long throw and solid recharging times to make RC15 an everyday duty light ready to answer the call.

- Max 860-Lumen Output
- Instant Strobe
- Lockout Function
- Car Charger Included

SIZE: Length: 168mm (6.6 in.) Diameter: 25.4mm (1 in.) Head diameter: 42mm (1.7 in.)

WEIGHT: 245g (8.6 oz) excluding battery



ANSI/NEMA FL 1

MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	860 Lumens	1h 10min	284m (Max)	20200cd (Max)	1m	IPX-8, underwater 2m
HIGH	350 Lumens	3h				
MID	130 Lumens	6h 30min				
LOW	9 Lumens	100h				
STROBE	860 Lumens	/				
SOS	/	/				

UC50 Max 900 Lumens

The UC50 rechargeable flashlight features 900-lumen maximum output and dual tail switch system for one hand operation. The tail switch provides momentary-on or constant-on operation while the side switch offers output selection and instant access to strobe function. The included USB charging cradle keeps the light ready to answer the call for everyday duty lighting.

- 900-lumen maximum output
- USB charging cradle
- Dual tail switch
- Instant strobe

SIZE: Length: 181mm (7.1 in.) Diameter: 25.4mm (1 in.) Head diameter: 40mm (1.6 in.)

WEIGHT: 248g (8.7 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	900 Lumens	1h 15min	288m (Max)	20860cd (Max)	1m	IPX-8, underwater 2m
HIGH	415 Lumens	2h 45min				
MID	150 Lumens	8h 30min				
LOW	10 Lumens	120h				
STROBE	900 Lumens	/				

UC45 Max 960 Lumens

Armed with integrated Micro USB charging port cover, the UC45 rechargeable flashlight streamlines the charging process of waterproof rechargeable flashlights and frees you from the annoying rubber charging port covers. The light also features 960-lumen maximum output and dual tail switch system for one hand operation. The tail switch provides momentary-on or constant-on operation while the side switch offers output selection and access to instant strobe function.

- 960 lumens maximum output
- Integrated Micro USB charging port cover
- 3200mAh rechargeable battery
- Dual tail switch
- Instant strobe

SIZE: Length: 178mm (7 in.) Diameter: 25.4mm (1 in.) Head diameter: 40.4mm (1.6 in.)

WEIGHT: 224g (7.9 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	960 Lumens	1h 15min	257m (Max)	16580cd (Max)	1m	IPX-8, underwater 2m
HIGH	375 Lumens	4h				
MID	100 Lumens	16h 30min				
LOW	10 Lumens	135h				
STROBE	960 Lumens	/				

UC40 Ultimate Edition Max 960 Lumens

With the latest CREE XM-L2 U2 LED, large capacity 3400mAh rechargeable battery and max 960-lumen output, the UC40 (Ultimate Edition) offers the best performance in the industry with a single cell and LED. Positive side switching on the head means total control of this long reaching light built to answer the call for years to come. And what's more, this tri-fuel capable light also has the ability to run on either 18650 Li-ion cell or two CR123A batteries when USB and AC sources are not available.


- Ultimate equipment
- Optimum output-to-weight ratios
- Portable USB charging
- Tri-fuel capable
- Instant strobe

SIZE: Length: 147mm (5.8 in.) Diameter: 25.4mm (1 in.)

WEIGHT: 144g (5.1 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	960 Lumens	1h 30min	204m (Max)	10404cd (Max)	1m	IPX-8, underwater 2m
HIGH	400 Lumens	3h 45min				
MID	110 Lumens	16h				
LOW	10 Lumens	150h				
STROBE	960 Lumens	/				

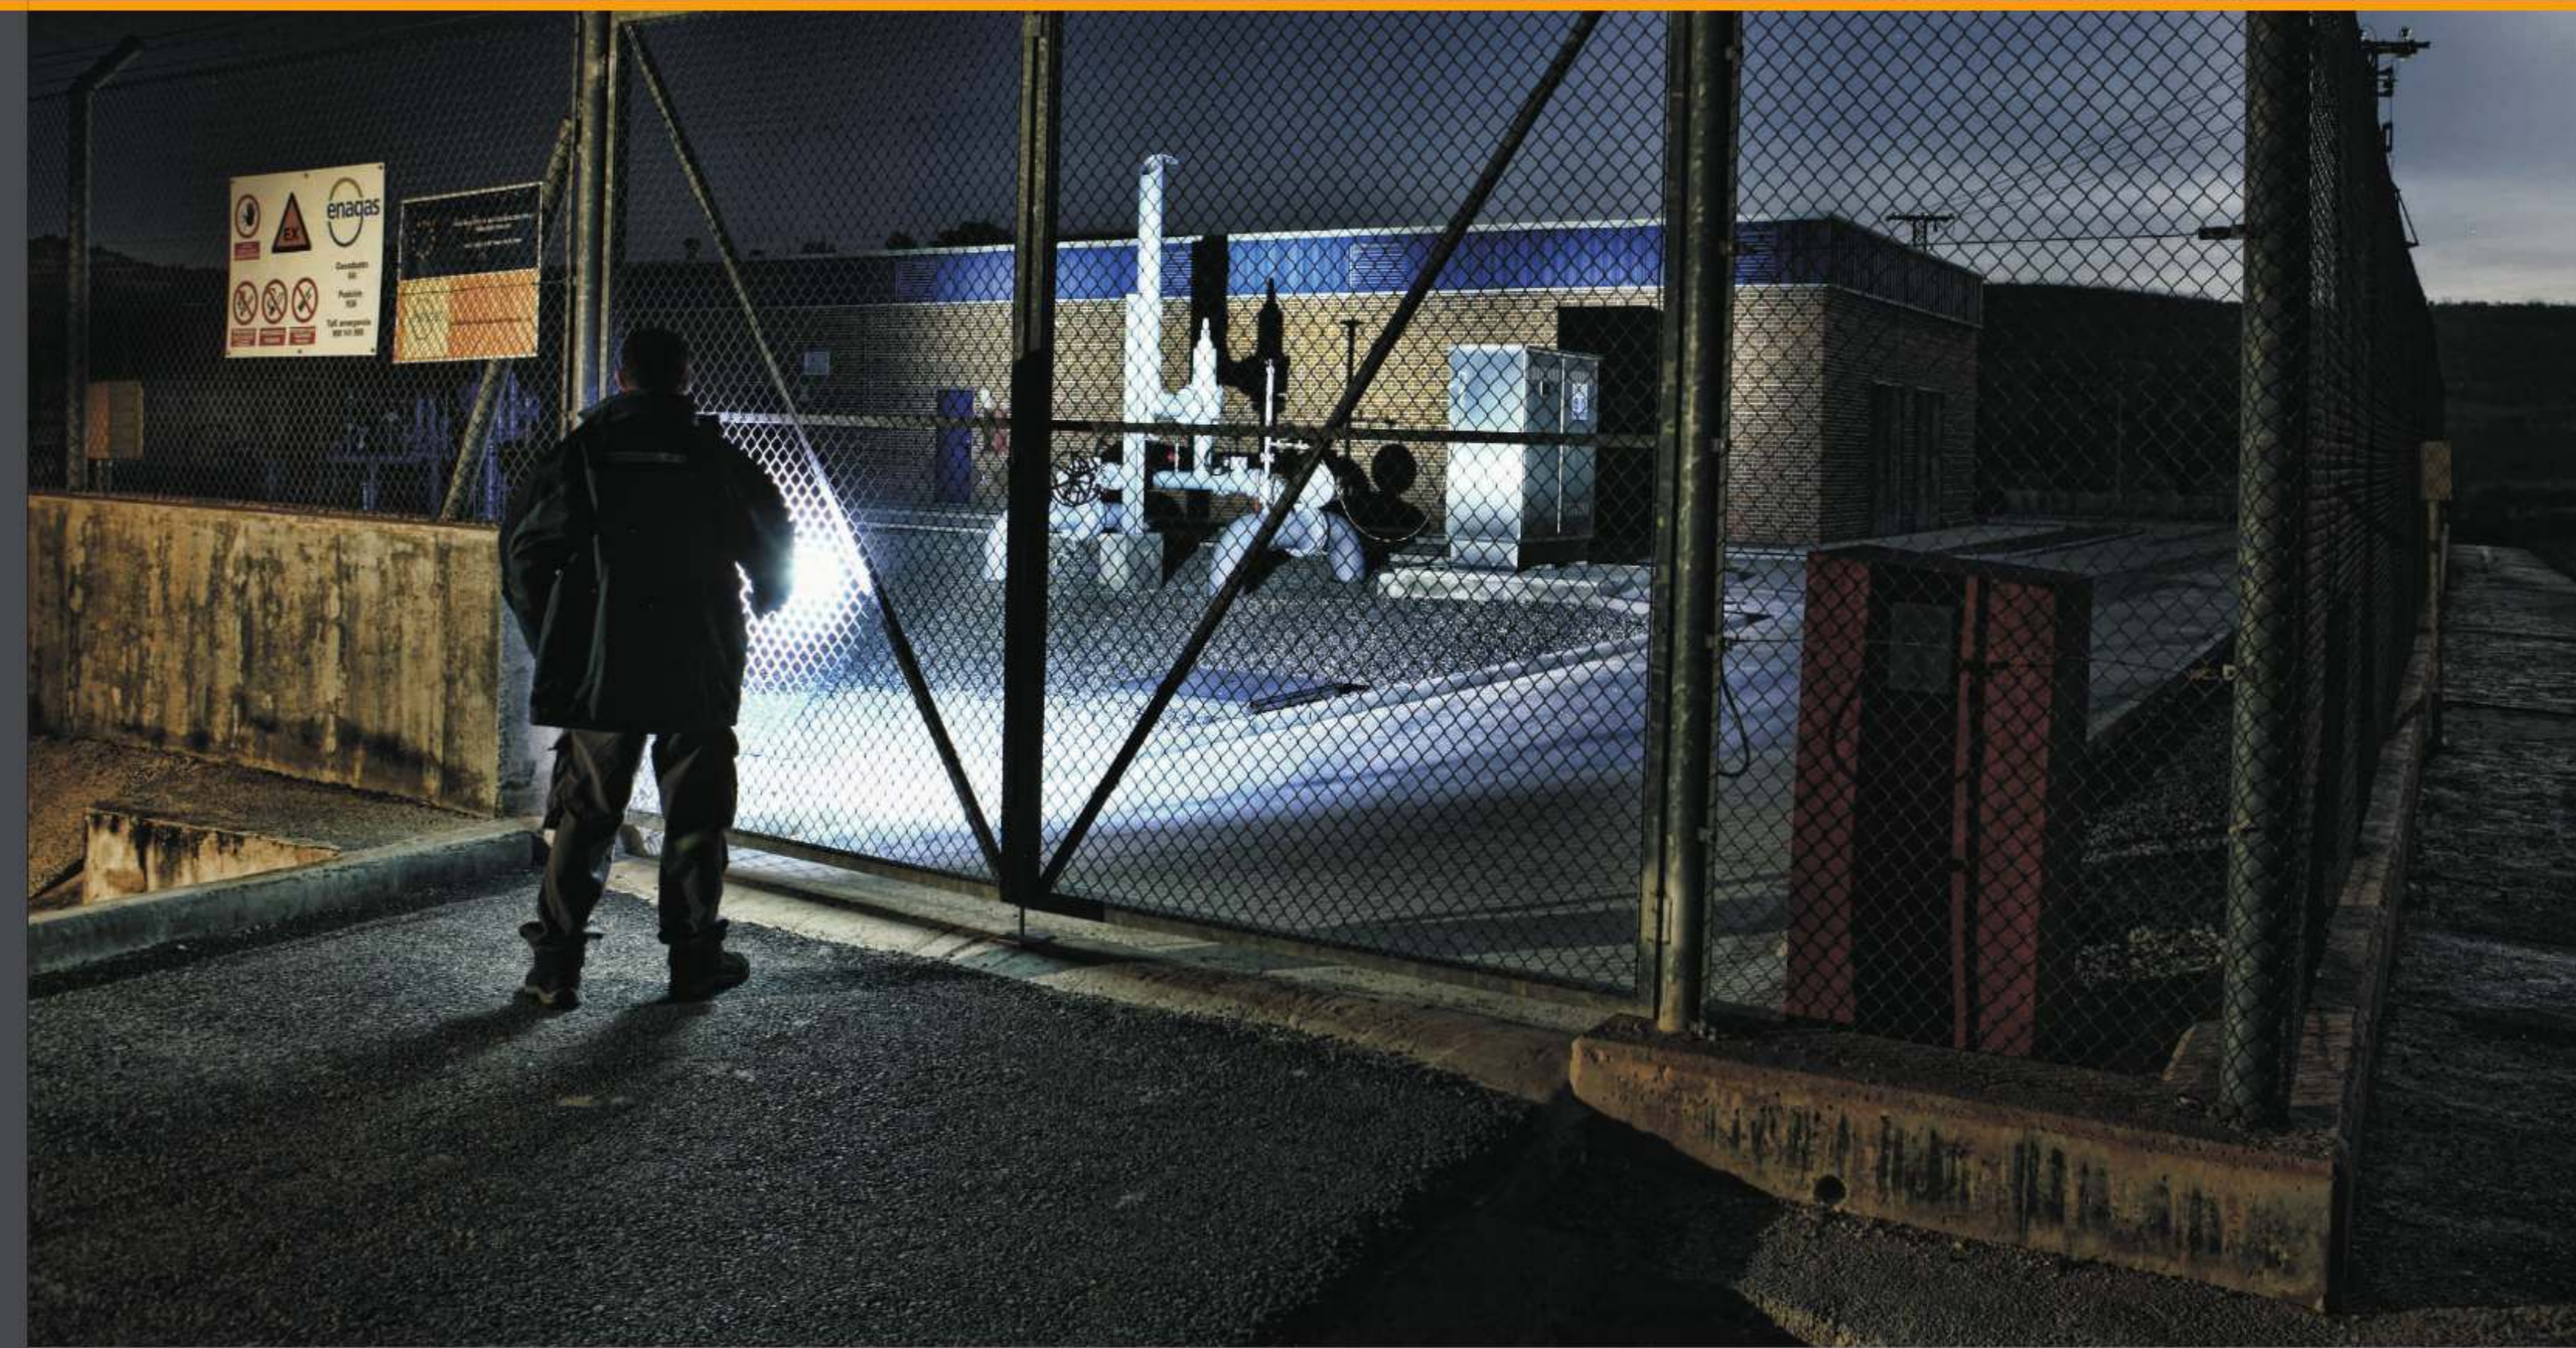

UC35 Max 960 Lumens

The Fenix UC35 rechargeable flashlight combines high intensity with reliable Micro-USB charging. Tactical tail switch offers momentary-on and side switch for output selection. With an optimized beam pattern, the UC35 offers six outputs including strobe mode to cover from daily use to outdoor and professional use.

- Micro-USB rechargeable
- Compatible with various batteries
- 960-lumen maximum output
- Optimum output-to-weight ratios
- Tactical tail switch

SIZE: Length: 150mm (5.9 in.) Diameter: 25.4mm (1 in.)

WEIGHT: 99g (3.5 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	960 Lumens	1h 30min	200m (Max)	10000cd (Max)	1m	IPX-8, underwater 2m
HIGH	480 Lumens	2h 40min				
MID	180 Lumens	9h 15min				
LOW	50 Lumens	38h				
ECO	14 Lumens	150h				
STROBE	960 Lumens	/				

HP SERIES

High Performance Outdoor Headlamps

Taking full advantage of modern lighting technology and creative design, Fenix successfully develops the HP series headlamps with outstanding performance. By using metal housing and constant brightness regulation circuit, Fenix HP series produce much brighter beam and offer more functions, longer runtime and better durability compared to the competitors. Waterproof rating up to IPX-8 standard, the Fenix HP models will satisfy your various lighting needs when searching, caving, cycling, mountaineering, hiking, etc.



HP30 Max 900 Lumens

The Fenix HP30 Headlamp employs high-capacity, belt-mounted 18650 cells to generate 900 lumens in Burst mode, 500 lumens in High output. An extended 233m beam distance reaches farther while the detachable diffuser lens switches quickly from spot to flood. When needed, the battery box USB port stands ready to power critical navigation and communication devices.

- 900-lumen burst mode
- Belt-mounted battery box
- USB output for emergency power
- Full aluminum housing to shed heat and impact
- Detachable diffuser lens

SIZE: Light: Length: 69.9mm (2.8") Width: 55.9mm (2.2") Height: 43.8mm (1.7") Battery Case: Length: 116.6mm (4.6") Width: 56.3mm (2.2") Height: 29.6mm (1.2")

WEIGHT: 276.5g (9.8 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
TURBO	900 Lumens	/	233m (Max)	13538cd (Max)	1m	IPX-6
HIGH	500 Lumens	3h 50min				
MID	200 Lumens	12h				
LOW	65 Lumens	32h 40min				
ECO	4 Lumens	300h				
SOS	200 Lumens	/				

HP15 Ultimate Edition Max 900 Lumens

Streamlined size and enhanced output, the HP15 ultimate edition kicks out 900-lumen output (Up to 242% performance boost from the regular version) with 178-meter beam distance. The separate battery compartment supports 4 AA batteries and provides excellent fore-aft balance. With rugged aluminum housing and four brightness levels, HP15 ultimate edition is a great choice for your demanding nighttime adventures.


- 900-lumen burst mode with 178-meter throw
- Four brightness levels plus SOS mode
- Excellent fore-aft balance
- Rugged aluminum chassis to shed heat and impact

SIZE: Light: 67.4mm (Length) × 55.9mm (Width) × 34.7mm (Height) (2.65" × 2.20" × 1.36") Battery Case: 88.8mm (Length) × 73.7mm (Width) × 26.2mm (Height) (3.49" × 2.90" × 1.03")

WEIGHT: 154.2g (6.84 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
BURST	900 Lumens	/	/	178m (Max)	7941cd (Max)	1m	IPX-6
HIGH	400 Lumens	3h 30min	3h 10min				
MID	150 Lumens	10h	8h				
LOW	50 Lumens	40h	44h				
ECO	10 Lumens	160h	170h				
SOS	50 Lumens	/	/				

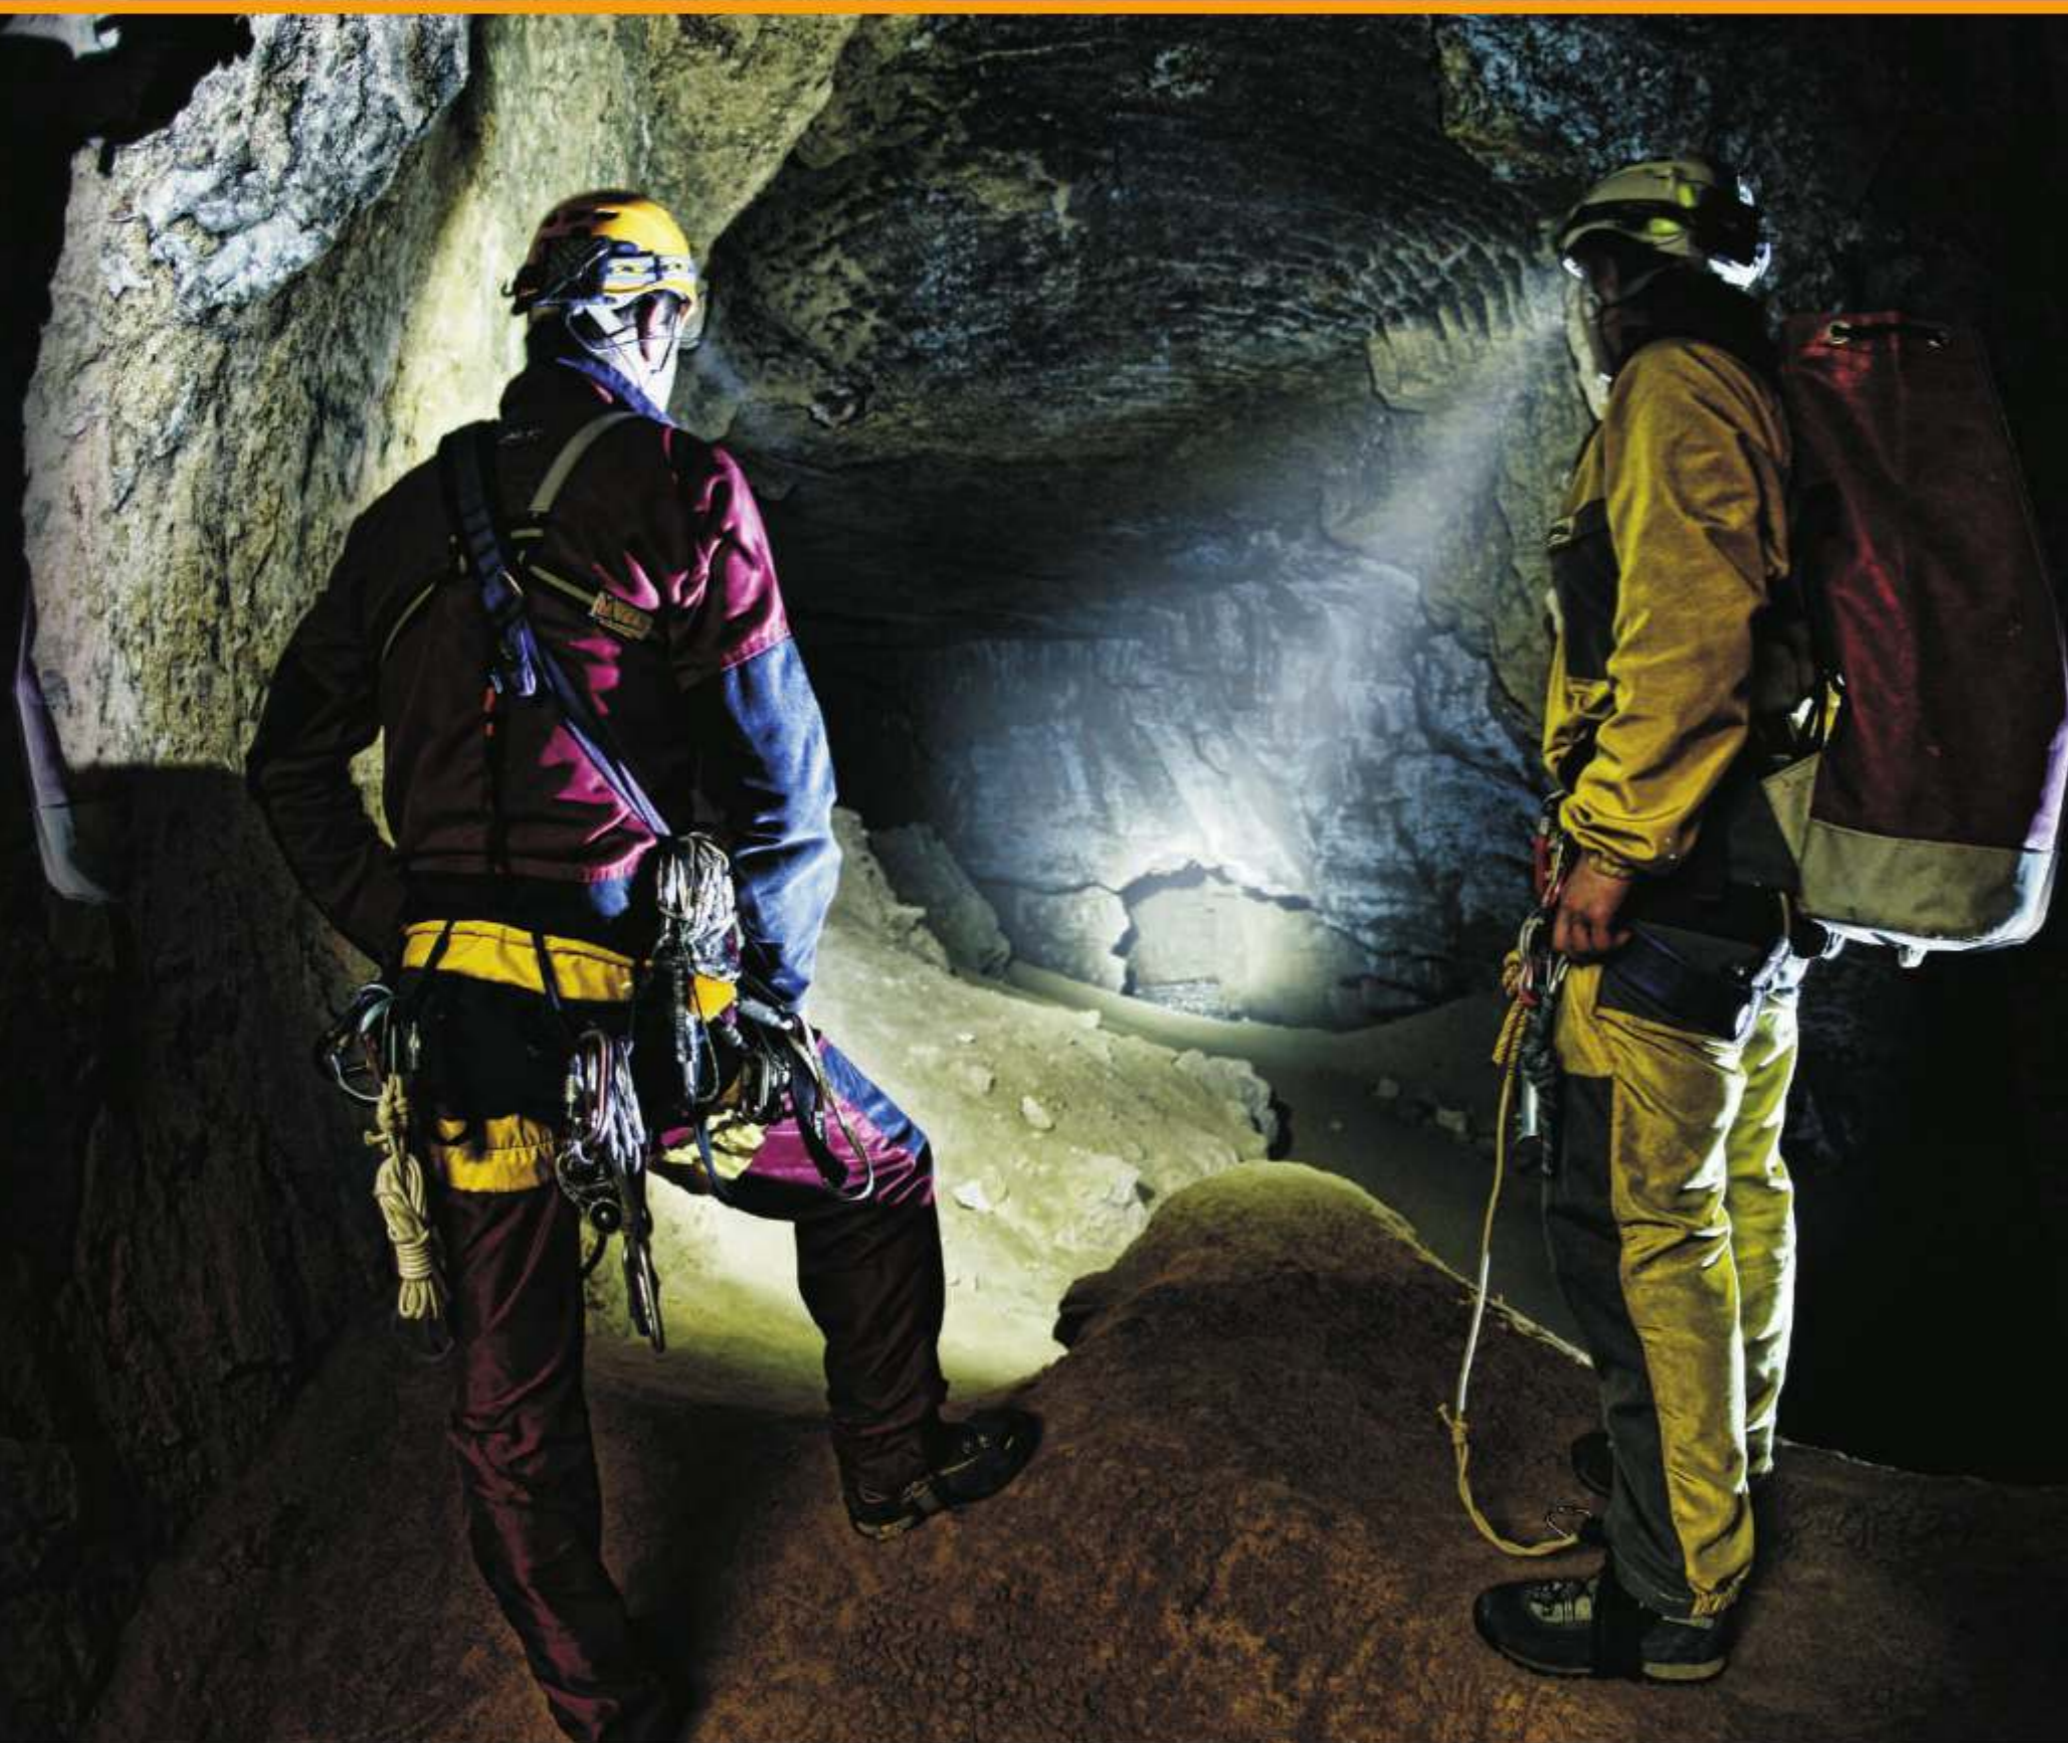

HP12 Max 900 Lumens

The powerful waterproof HP12 headlamp features 900-lumen burst mode with a beam distance of 123 meters. The separate battery compartment provides excellent fore-aft balance and supports both rechargeable 18650 Li-ion battery and primary CR123A batteries. Rugged aluminum housing with IP68 waterproof and dust proof rating, HP12 is perfect fit for technical and dynamic activities.

- IP68 waterproof and dust proof rating
- Excellent fore-aft balance
- Rugged aluminum housing
- 900-lumen burst mode
- Four brightness levels

SIZE: Light size: 62.1mm×41.2mm×33.3mm (2.44"×1.62"×1.31")
 Battery case size: 93.4mm×41.2mm×33.3mm (3.67"×1.62"×1.31")

WEIGHT: 145g (5.11 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	DUST&WATERPROOF
BURST	900 Lumens	/	123m (Max)	3784cd (Max)	2m	IP68
HIGH	400 Lumens	3h 45min				
MID	150 Lumens	10h 10min				
LOW	50 Lumens	36h				
ECO	10 Lumens	145h				

HP25 Max 360 Lumens

The Fenix HP25 Headlamp puts you in charge as conditions change with 20 distinct lighting patterns. Two dedicated light sources combine with an individual control system to deliver flood and spot combinations up to 360 lumens from 4 AA batteries. With beam distance up to 153 meters and runtime to 9 days, HP25 opens up new worlds of all-season backcountry and cave exploration.

- Dedicated flood and spot light
- Individual control system
- 12 sets of flood and spot combinations
- Die-casting structure for better heat dissipation

SIZE: Light: Length: 76mm (3") Width: 55.7mm (2.2") Height: 31.5mm (1.2") Battery Case: Length: 88.8mm (3.5") Width: 73.7mm (2.9") Height: 26.2mm (1")

WEIGHT: 183.5g (6.5 oz) excluding battery



ANSI/NEMA FL 1										
MODE	FLOOD			SPOT			DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	OUTPUT	RUNTIME		OUTPUT	RUNTIME					
		Ni-MH Battery	Alkaline Battery		Ni-MH Battery	Alkaline Battery				
TURBO	180 Lumens	4h 40min	4h	/	/	/	153m (Max)	5854cd (Max)	1m	IPX-6
HIGH	90 Lumens	10h 30min	11h	180 Lumens	4h 40min	4h				
MID	45 Lumens	24h	30h	90 Lumens	10h 30min	11h				
LOW	4 Lumens	206h	220h	45 Lumens	24h	30h				
SOS	/	/	/	90 Lumens	/	/				

HP05 Max 350 Lumens

The Fenix HP05 Headlamp reshapes hands-free lighting to combine close-in and distance illumination. Four brightness levels, SOS mode and a vision-preserving red light are featured along with a quick-change battery system. An 80-degree beam angle and 60-degree tilt make the HP05 a worthy after-dark companion powered by common AA batteries.

- Quick-change battery system
- Rugged aluminum chassis to shed heat and impact
- Compact design with serious performance
- Four brightness levels and SOS mode

SIZE: Light: Length: 54.3mm (2.1") Width: 48.9mm (1.9") Height: 32.9mm (1.3") Battery Case: Length: 87.6mm (3.4") Width: 58.5mm (2.3") Height: 33.8mm (1.3")

WEIGHT: 161g (5.7 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
TURBO	350 Lumens	2h 35min	2h 15min	122m (Max)	3756cd (Max)	1m	IPX-6
HIGH	150 Lumens	6h 10min	9h				
MID	50 Lumens	17h 20min	18h				
LOW	4 Lumens	160h	170h				
RED LIGHT MODE	/	/	/				
SOS	50 Lumens	/	/				



HP40F

Max **450** Lumens

The Fenix HP40F fishing headlamp features a 450-lumen white light and a high power blue LED with 24 meters beam distance. The belt-mounted 18650 battery box reduces weight carried on the head and provides up to 8.5 hour night fishing time. When needed, the USB port of the battery box stands ready to power critical and communication devices.

- High power blue LED with 24m throw
- 450-lumen white light
- Belt-mounted battery box
- USB output for emergency power
- Aluminum housing to shed heat and impact

SIZE: Light: Length: 76mm (3") Width: 55.7mm (2.2") Height: 31.5mm (1.2") Battery Case: Length: 116.6mm (4.6") Width: 56.3mm (2.2") Height: 29.6mm (1.2")

WEIGHT: 280.5g (9.9 oz) excluding battery



ANSI/NEMA FL 1								
MODE	WHITE LIGHT		BLUE LIGHT		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	OUTPUT	RUNTIME	OUTPUT	RUNTIME				
TURBO	450Lumens	6h	/	/	110m (White Light), 24m (Blue Light) (Max)	3062cd (Max)	1m	IPX-6
HIGH	180Lumens	15h 10min	50Lumens	8h 30min				
MID	65Lumens	48h	28Lumens	14h				
LOW	8Lumens	280h	12Lumens	32h				
SOS	180Lumens							

HP40H

Max **450** Lumens

The Fenix HP40H headlamp puts you in charge as conditions change with variable LED output. Besides the white light with wide illumination range, the headlamp features a red spot light with 105-meter extended reach. Hunters can rely on the HP40H to preserve night vision without spooking animals while hunting at night.

- Utilizes Cree XP-E2 P3 LED and XP-G2 R5 LED with a lifespan of 50,000 hours
- Two dedicated light sources with two separate control systems
- Made from durable aluminum alloy and performance plastic
- Powered by four AA (Ni-MH, Alkaline) batteries

SIZE: Light: 76mm (Length) × 55.7mm (Width) × 31.5mm (Height) (3''×2.2''×1.2'')
 Battery Case: 88.8mm (Length) × 73.7mm (Width) × 26.2mm (Height) (3.5''×2.9''×1'')

WEIGHT: 183.5g (6.5 oz) excluding battery



ANSI/NEMA FL 1								
MODE	WHITE LIGHT		RED LIGHT		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	OUTPUT	RUNTIME	OUTPUT	RUNTIME				
TURBO	450Lumens	3h 30min	/	/	110m (White Light), 105m (Red Light) (Max)	2826cd (Max)	1m	IPX-6
HIGH	180Lumens	6h 45min	150Lumens	4h 9h				
MID	65Lumens	21h 45min	75Lumens	8h 12h				
LOW	8Lumens	140h	25Lumens	37h 30min 40h				
SOS	180Lumens							

HL SERIES

Lightweight Outdoor Headlamps

With exquisite appearance, excellent performance and wide-ranging output options, Fenix develops the HL Series with optimum weight-to-output ratios. Waterproof rating up to IPX-8 standard, the HL models pull high lumen output for outdoor hiking, jogging, climbing, camping and daily use, making you enjoy the real outdoor funs in various environments.



HL55 Max 900 Lumens

The Fenix HL55 Headlamp offers four useful brightness levels plus 900-lumen Burst mode and up to 100hr extended runtime from the high-capacity 18650 cells. Neutral white light means superior definition and penetration in high-humidity environments. A 116m carry distance reaches farther while the side switch on the head is all you need for ON/OFF, output selection and instant Burst.

- Max 900 lumens
- Four brightness levels plus burst mode
- Neutral white tint for better color rendition
- All-in-one side switch control

SIZE: Length: 84mm (3.3") Width: 46mm (1.8")
Height: 48mm (1.9")

WEIGHT: 115g (4.1 oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
BURST	900 Lumens	/	116m (Max)	3380cd (Max)	1m	IPX-8, underwater 2m
HIGH	400 Lumens	3h 30min				
MID	150 Lumens	9h 30min				
LOW	50 Lumens	31h				
ECO	10 Lumens	100h				

HL50 Max 365 Lumens

Ultra compact design and powered by CR123A battery, the 2-meter submersible all-weather HL50 headlamp helps you reach new heights in your outdoor adventures. The Fenix HL50 headlamp features 365 lumens neutral white output and the ability to use either CR123A or AA batteries. You can also pop the lighting head out for handheld or keychain use with the always-ready HL50.


- Feather light
- All-weather performance
- Truly versatile

SIZE: Length: 63.8mm (2.5") Width: 32mm (1.3")
Height: 30mm (1.2")

WEIGHT: 57g (2 oz) excluding battery



ANSI/NEMA FL 1								
MODE	OUTPUT		RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
	CR123A Battery	Ni-MH AA Battery	CR123A Battery	Ni-MH AA Battery				
BURST	365Lumens	285Lumens	/	/	77m (Max)	1480cd (Max)	1m	IPX-8, underwater 2m
HIGH	170Lumens	150Lumens	3h	2h				
MID	60Lumens	55Lumens	9h 45min	6h 20min				
LOW	4Lumens	3Lumens	150h	110h				

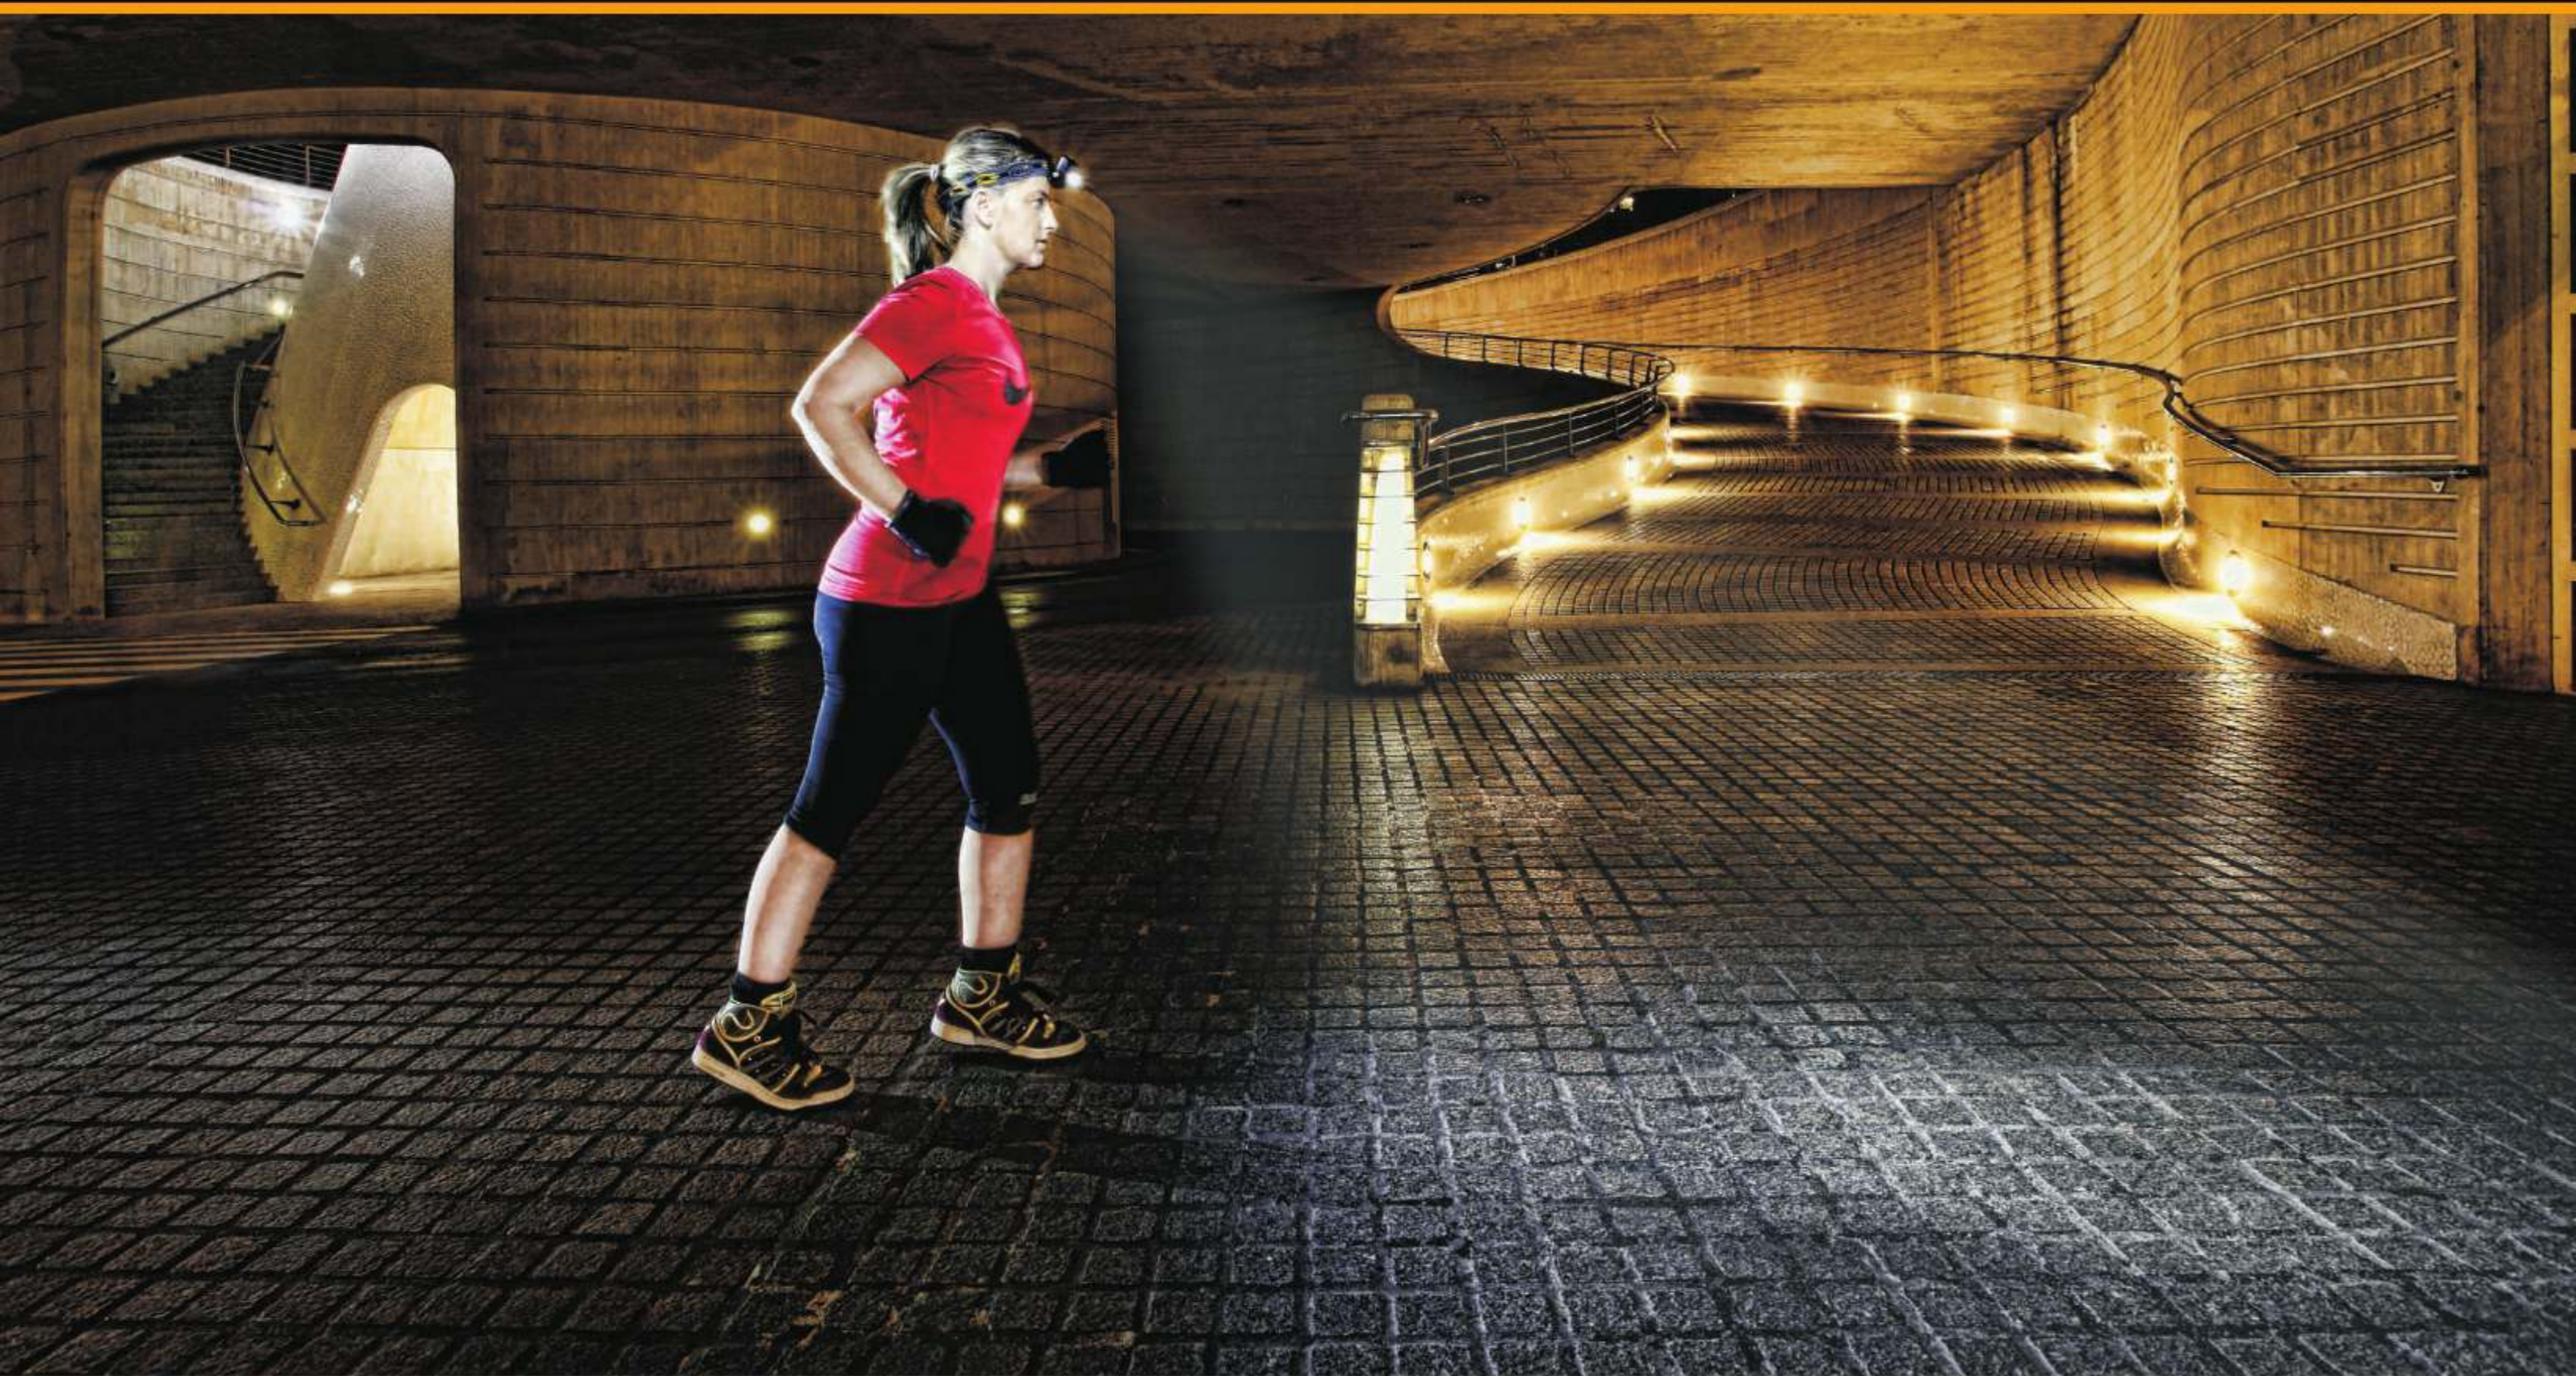

HL30 2015 Edition Max 230 Lumens

Powered by 2 AA batteries, HL30 delivers a 230-lumen output and runs for 160 hours on low mode. Featuring the unique broad beam system, HL30 illuminates the entire scene with unmatched clarity and consistency in camp, hobby or work situations. The integrated red light protects night vision while making map reading easy even under adverse conditions. HL30 headlamp is a great choice for camping, hiking and more.

- 230-lumen burst mode
- Additional red light
- Three brightness levels plus SOS mode
- Unique broad beam system

SIZE: Length: 70mm (2.8") Width: 47.5mm (1.9")
Height: 37.5mm (1.5")

WEIGHT: 86.6g (3.1 oz) excluding battery



"Best Bargain" by Backpacker Magazine

ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	150 Lumens	4h	3h 30min	51m (Max)	665cd (Max)	1m	IPX-6
MID	50 Lumens	12h	14h				
LOW	4 Lumens	150h	160h				
BURST	230 Lumens	2h 25min	2h				
SOS	50 Lumens	/	/				
RED LIGHT	CONSTANT-ON	/	/				
	FLASH	/	/				

HL25 Max 280 Lumens

Rugged aluminum housing and waterproof construction, the IP68 rated HL25 headlamp is ready for anything you can throw at it. Armed with a powerful Cree XP-G2 LED, this triple AAA battery powered headlamp provides 280-lumen output with 68-meter beam distance. Featuring three brightness levels and burst mode, HL25 is a great choice for your nighttime adventures.

- IP68 rated
- Rugged aluminum housing
- 280-lumen burst mode
- Three brightness levels

SIZE: 66mm×45mm×47mm (2.6" ×1.8"×1.9")

WEIGHT: 90.3g (3.2 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	DUST&WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	150 Lumens	3h	4h	68m (Max)	1162cd (Max)	1.5m	IP68
MID	50 Lumens	8h	12h				
LOW	4 Lumens	120h	140h				
BURST	280 Lumens	/	/				

HL23 Max 150 Lumens

Rugged Aluminum housing and waterproof construction, the IP68 rated HL23 headlamp is ready for anything you can throw at it. Equipped with a powerful Cree XP-G2 LED, this single AA battery powered headlamp provides 150-lumen output with 55-meter beam distance. Featuring three brightness levels, HL23 is a great choice for your nighttime adventures.

- IP68 rated
- Rugged aluminum housing
- Three brightness levels
- Powered by one AA batteries

SIZE: 71mm×38.9mm×40mm (2.8" ×1.5"×1.6")

WEIGHT: 52g (1.8 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME		DISTANCE	INTENSITY	IMPACT RESISTANT	DUST&WATERPROOF
		Ni-MH Battery	Alkaline Battery				
HIGH	150 Lumens	1h 20min	1h	55m (Max)	758cd (Max)	1.5m	IP68
MID	50 Lumens	5h 40min	4h 25min				
LOW	3 Lumens	100h	110h				

HL10 Max 70 Lumens

The Fenix HL10 Headlamp puts 70 lumens max output in a featherweight case that opens to release a mini flashlight. Three brightness levels deliver a 90 degree beam with a 100 degree tilt inside the durable case that measures only 45.2g.

- Max 70-lumen output
- Powerful even 90°flood
- 3 brightness levels
- Dual-use capability

SIZE: Length: 69.5mm (2.7") Width: 29.2mm (1.1")
Height: 28.2mm (1.1")

WEIGHT: 45.2g (1.6 oz) excluding battery




"Editor's Choice Award" by Outdoor Life Magazine


ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME	DISTANCE	INTENSITY	IMPACT RESISTANT	WATERPROOF	
						IMPACT RESISTANT	WATERPROOF
HIGH	70 Lumens	50min	15m (Max)	55cd (Max)	1m		IPX-8, underwater 2m
MID	27 Lumens	2h 45min					
LOW	3 Lumens	27h					

BIKE LIGHT SERIES


With the strong innovation capability, Fenix bike lights feature Dual Distance Beam System, producing close-in visibility and long-range illumination as well as broad flood beam. With the user-friendly structure design, quality material and waterproof to IPX-6 standard, Fenix bike lights are the best choice for professional riders and ensure the users a safe and excellent riding experience during the night riding.

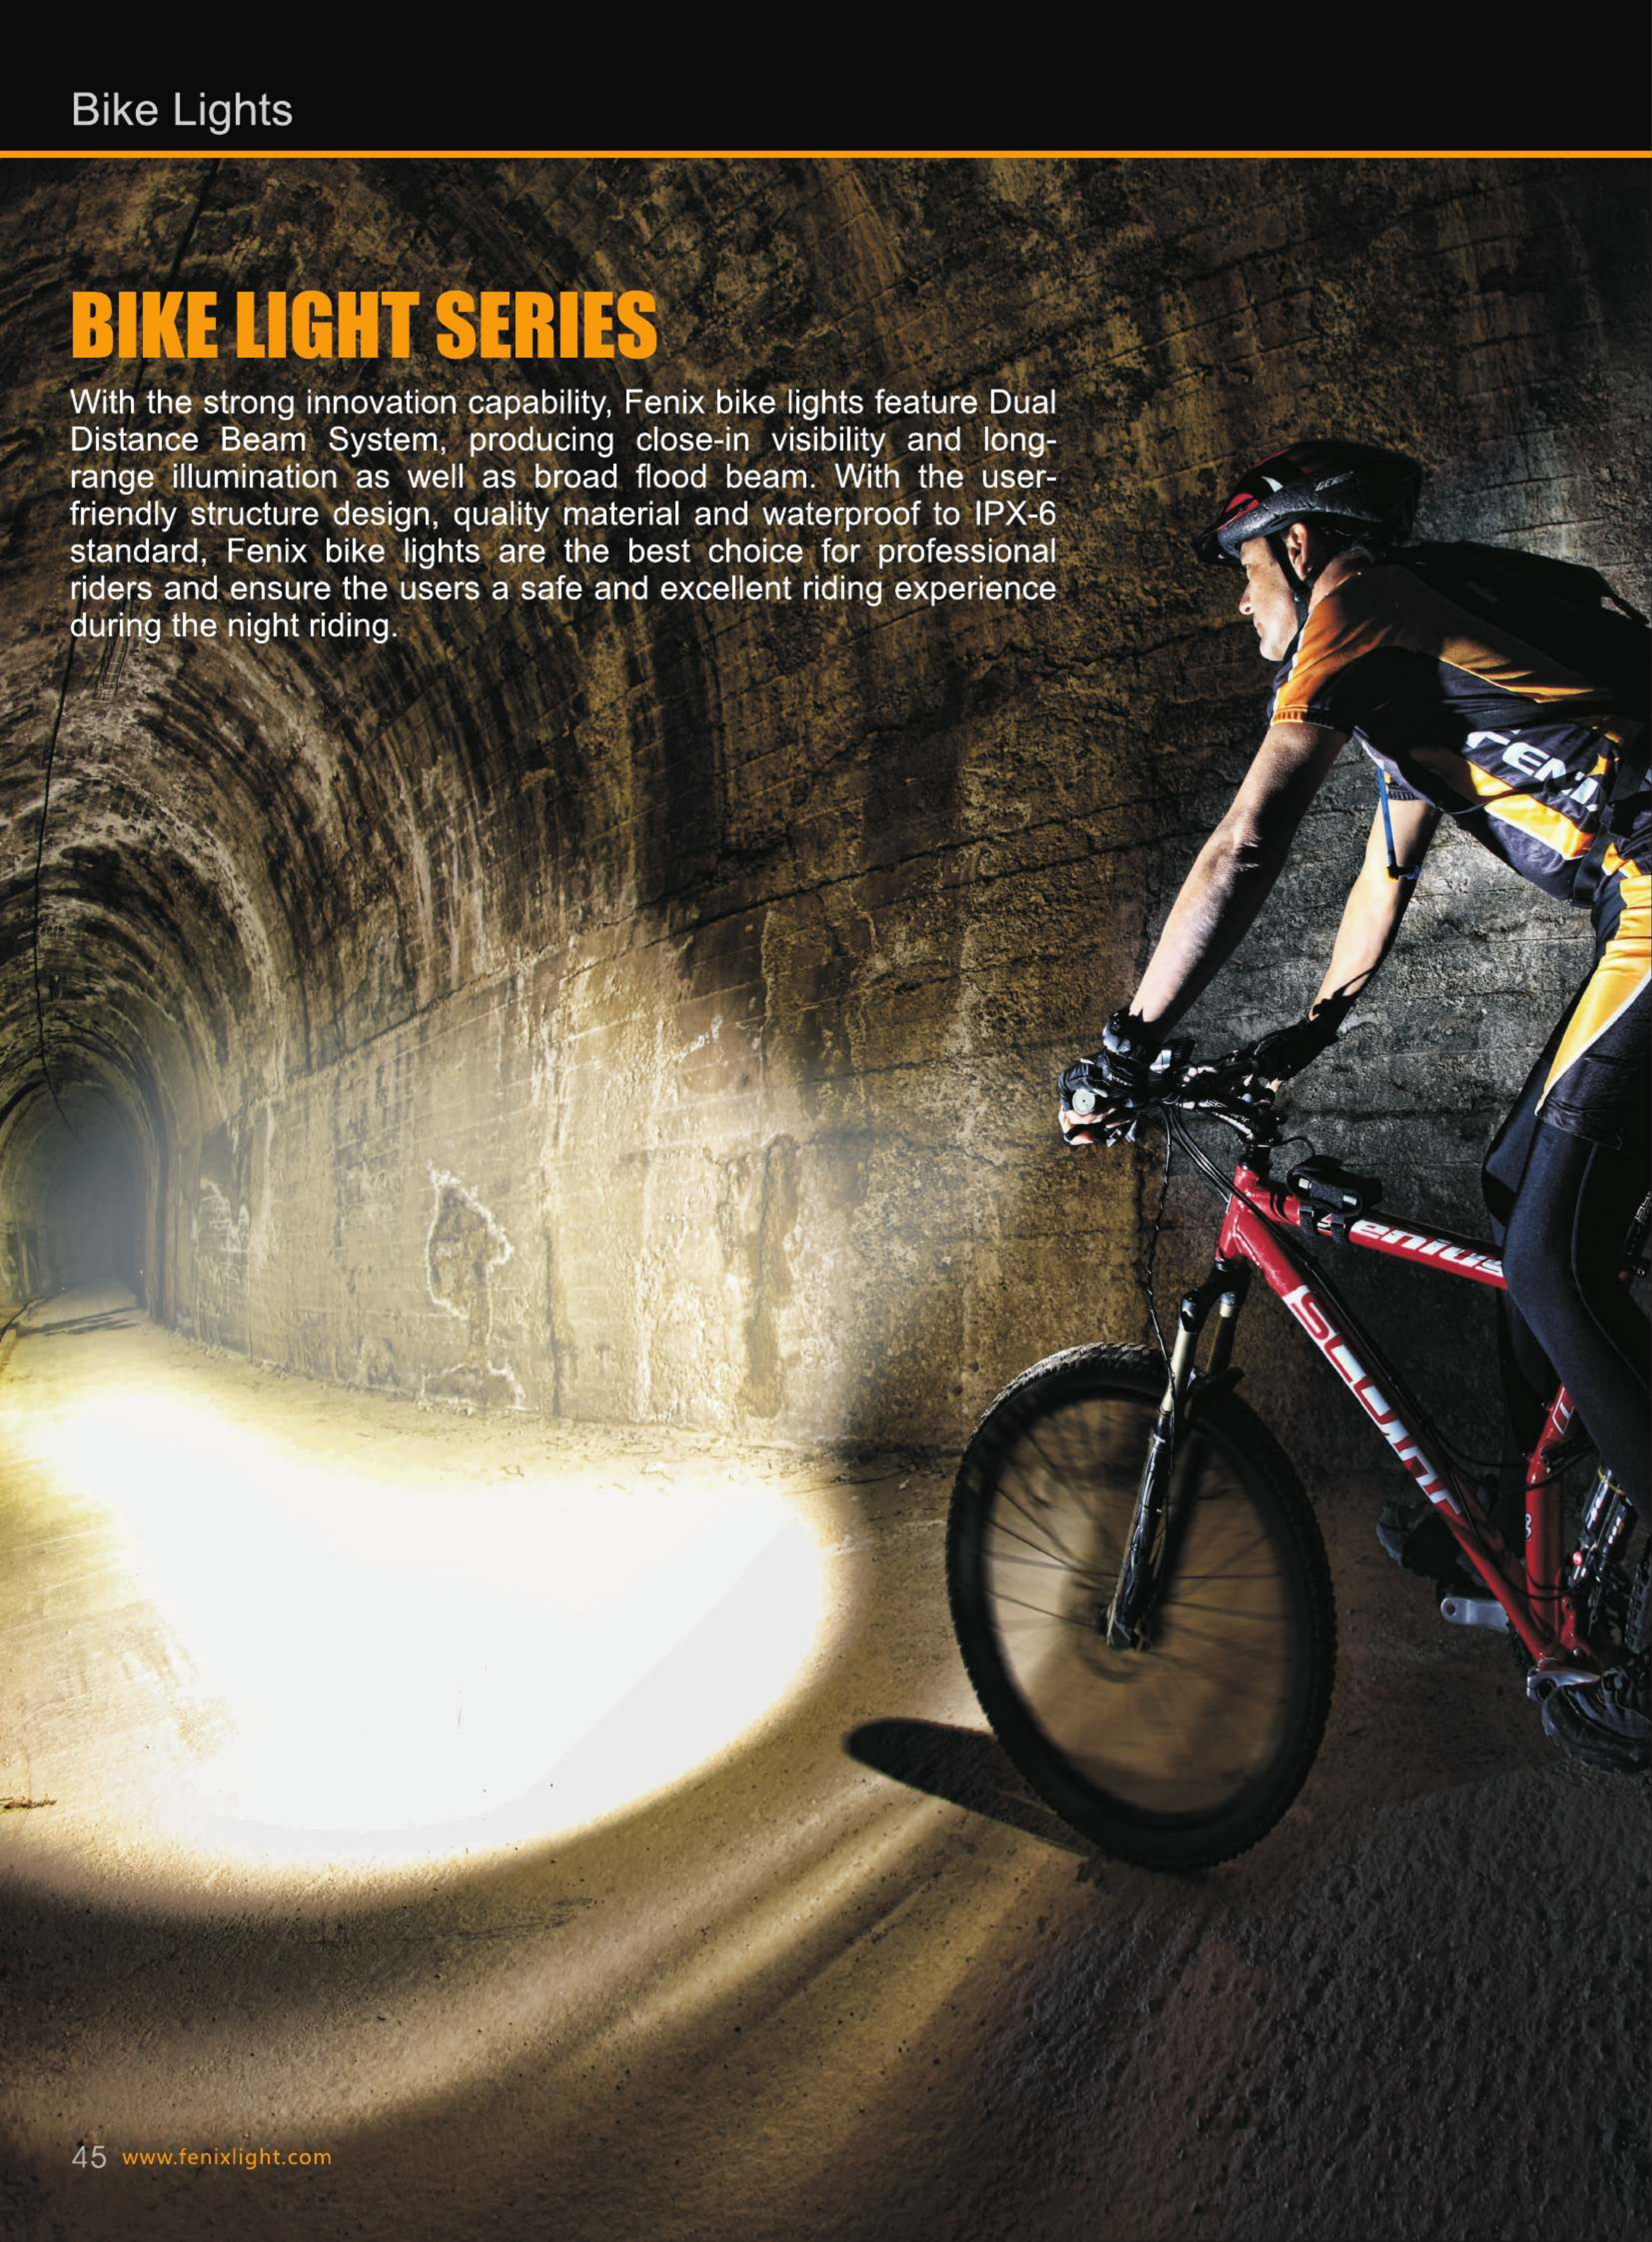

Dual Distance Beam System

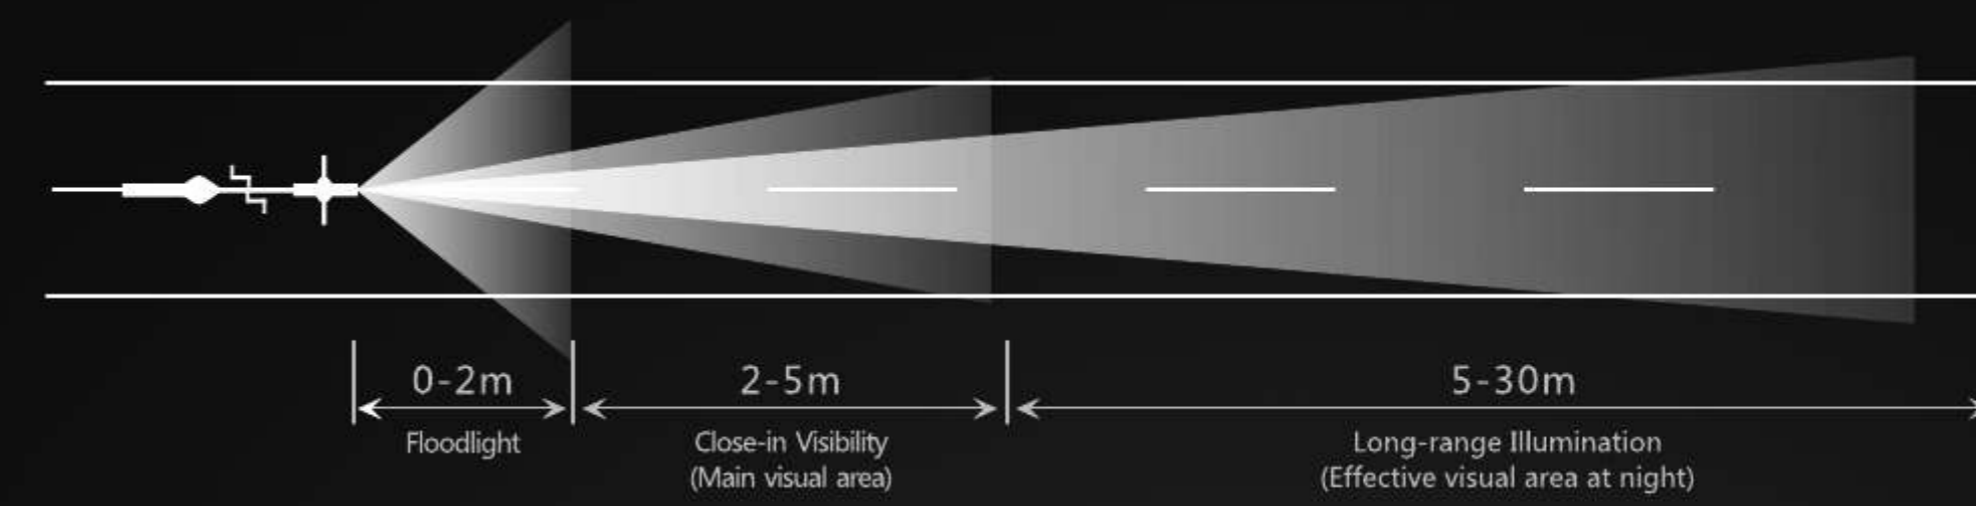


Broad Floodlight
With the aspherical reflector design, Fenix Bike light brings a broad floodlight and a beam throw reaching deep to over 150 meters.

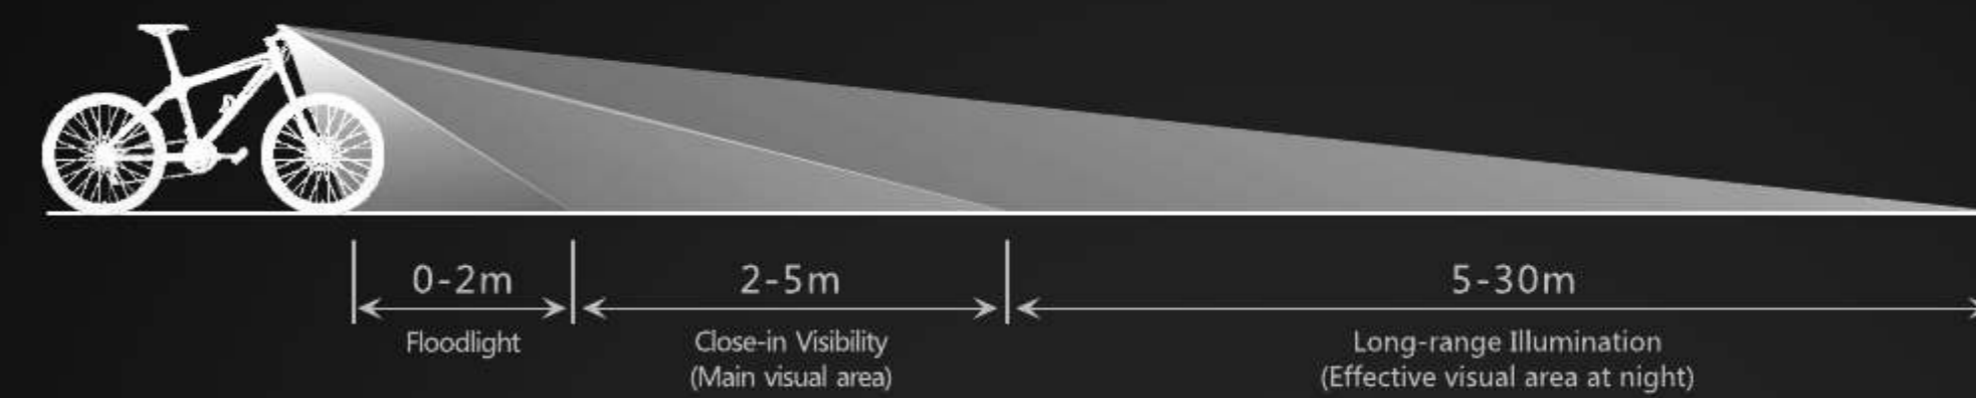

No Blind Area Lighting
The upward beam is refracted by the lens, forming auxiliary illumination immediately in front of the bike where ordinary bike light can not reach.

Close-in Visibility and Long-range Illumination

The upward beam is refracted by the lens, forming auxiliary illumination immediately in front of the bike where ordinary bike light can not reach.

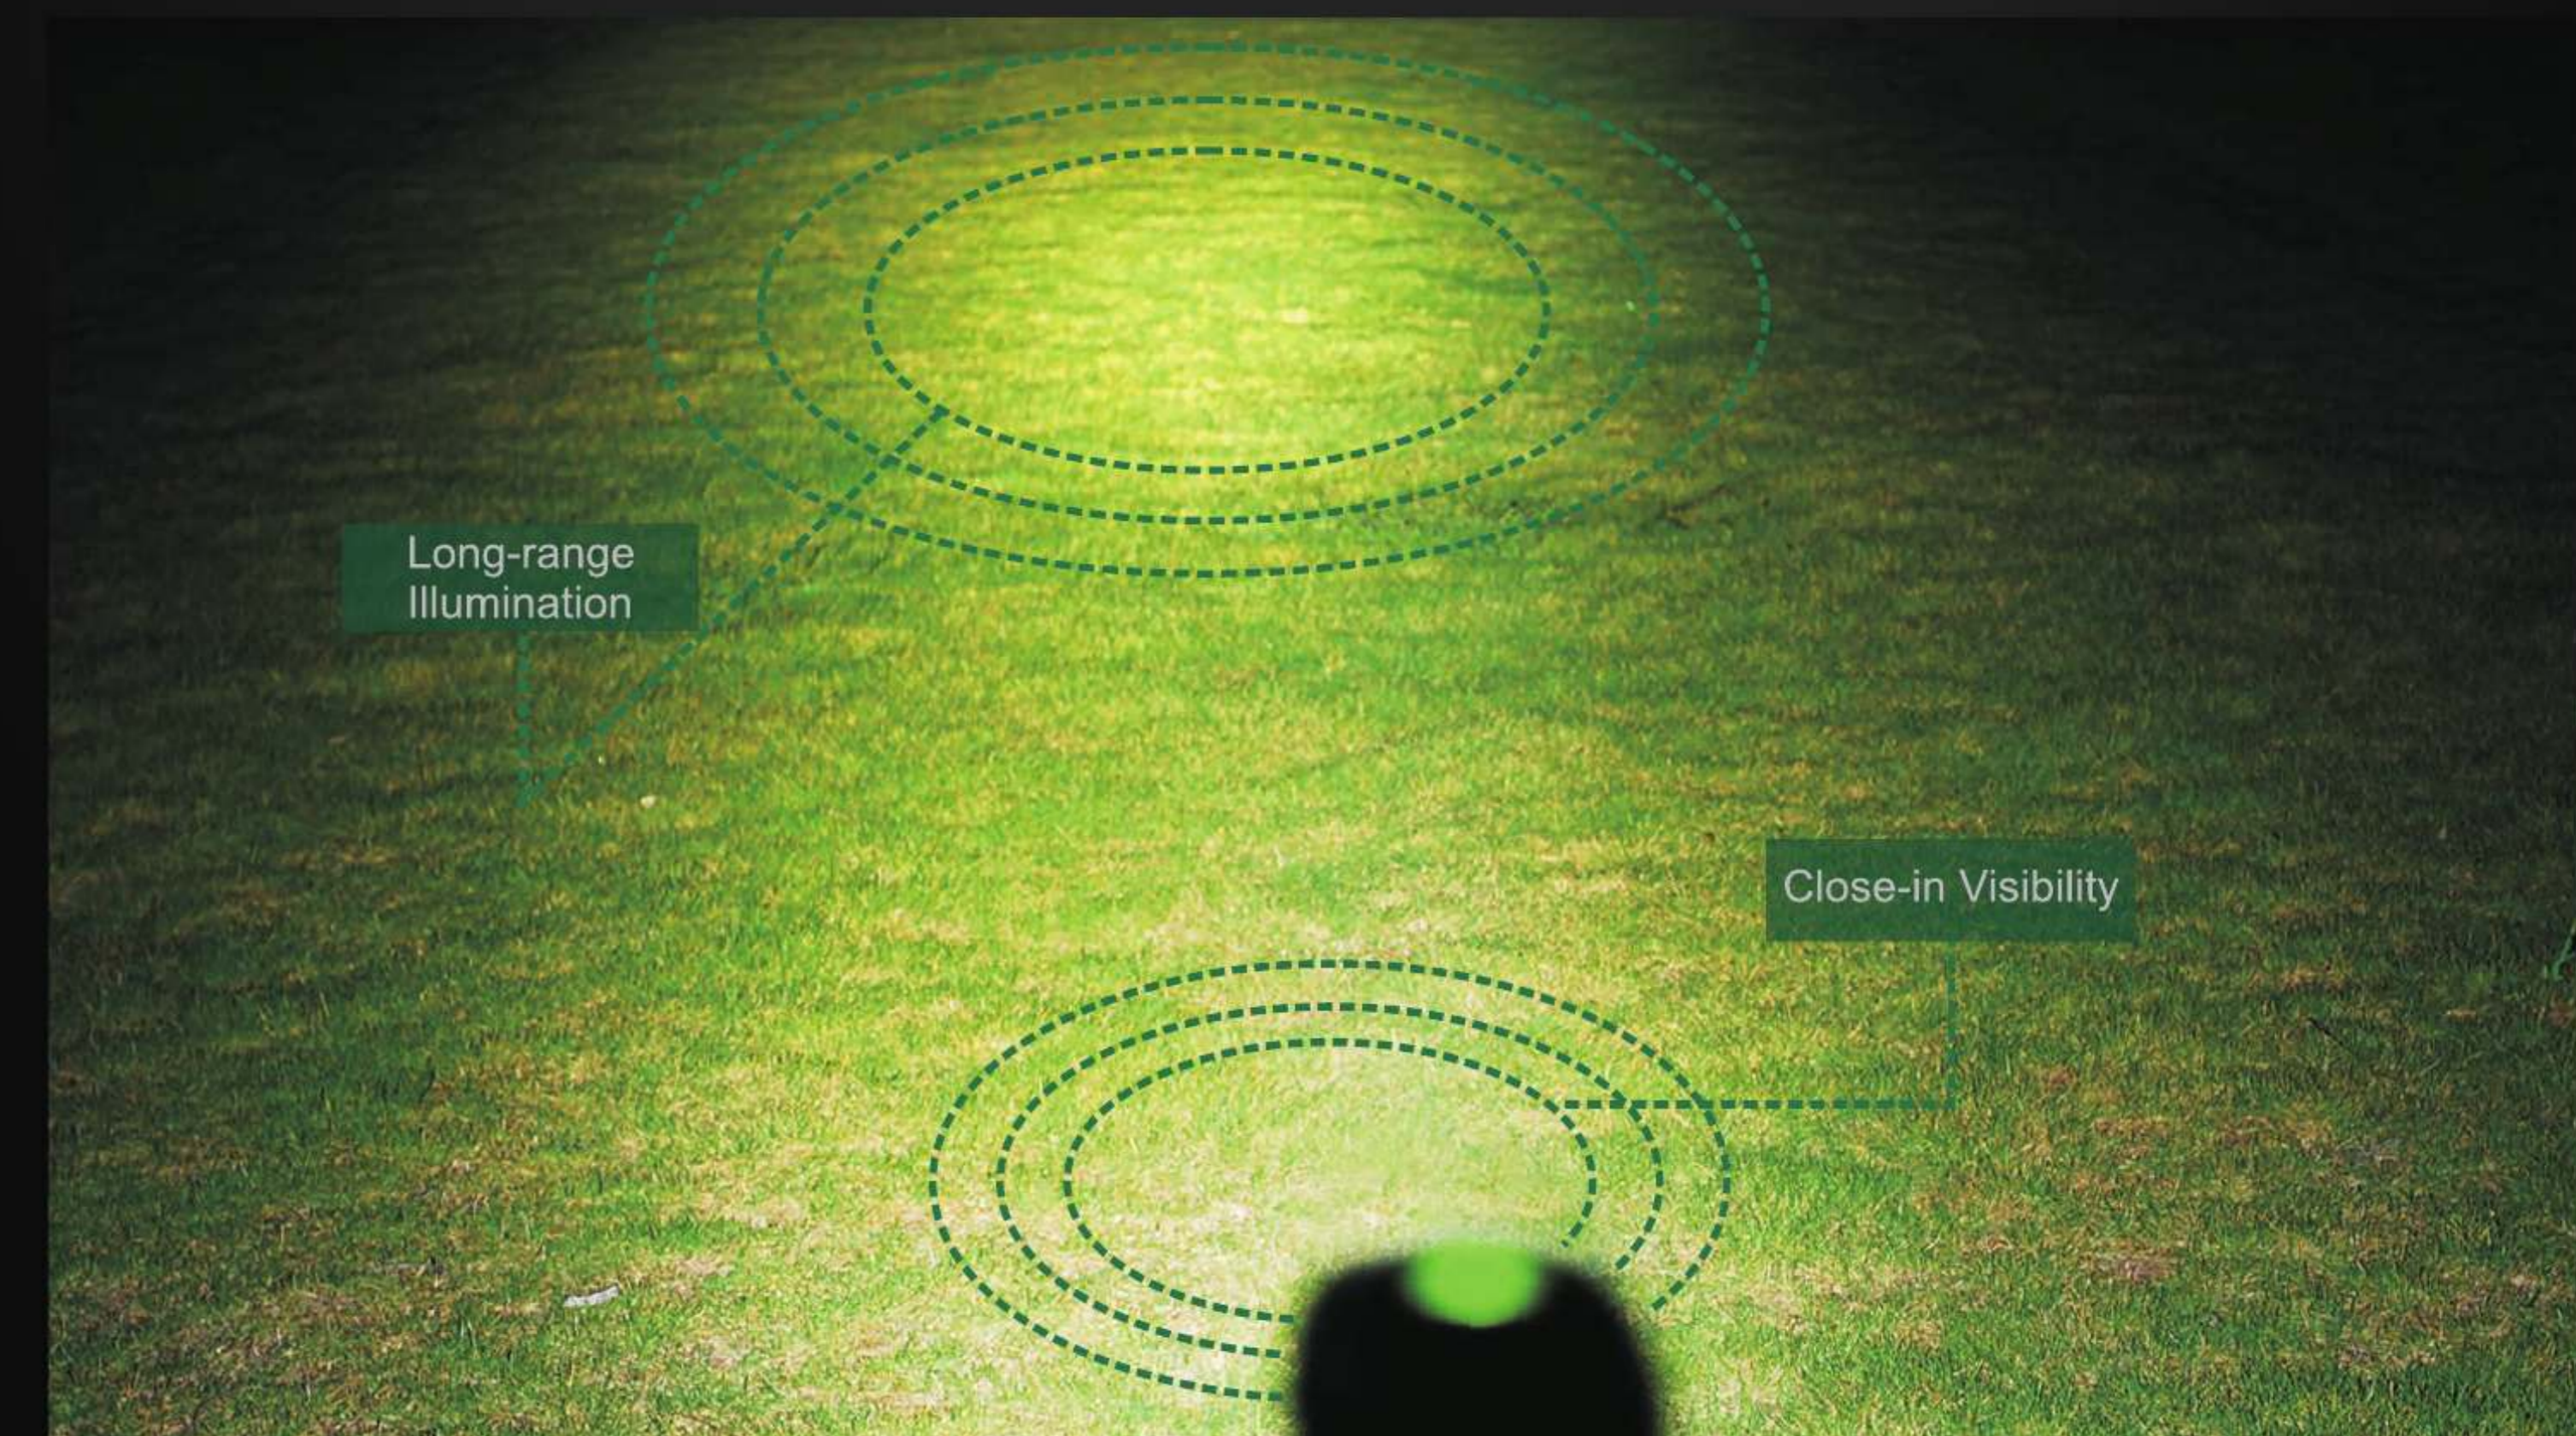

BTR20

Max **800** Lumens

The Fenix BTR20 Bike Light builds on the BT platform with even greater output, power supply options and instant turbo activation. Featuring the Dual Distance Beam system and neutral white output up to 800 lumens, the BTR20 offers four brightness levels and one flashing mode with the included Fenix BA2B rechargeable battery pack to keep it rolling longer and stronger.

- Dual Distance Beam System
- Instant Turbo with the remote pressure switch
- Advanced power solution
- Aerodynamics design

SIZE: Light: Length: 69.2mm (2.7") Width: 44.2mm (1.7") Height: 56.6mm (2.2") Battery Case: Length: 87mm (3.4") Width: 59mm (2.3") Height: 37mm (1.5")

WEIGHT: 311g (11 oz) excluding battery



ANSI/NEMA FL 1					
MODE	OUTPUT	RUNTIME	DISTANCE	IMPACT RESISTANT	WATERPROOF
TURBO	800 Lumens	2h	167m (Max)	1m	IPX-6
HIGH	400 Lumens	4h 40min			
MID	200 Lumens	10h			
LOW	80 Lumens	23h			
FLASHING MODE	200 Lumens	/			

BT20

Max **750** Lumens

BT20 is the world's first professional bike light which employs Dual Distance Beam System. It features broad floodlight, close-in visibility and long-range illumination. BT20 employs the neutral white LED featuring the advantages of strong penetration power and good color rendering, which helps night riders better identify the color of objects and outdoor conditions, ensuring safety when mountain biking, touring, commuting, etc.

- Dual Distance Beam System
- User-friendly design
- Quality components and materials
- Wide compatibility

SIZE: Light: Length: 67.8mm (2.7") Width: 42.9mm (1.7") Height: 56.6mm (2.2") Battery Case: Length: 100mm (4") Width: 27.5mm (1.1") Height: 56mm (2.2")

WEIGHT: 121g (4.3 oz) excluding battery



ISPO Award Winner 2013

The Best Cycling Gear of 2013 by Outside Magazine

ANSI/NEMA FL 1					
MODE	OUTPUT	RUNTIME	DISTANCE	IMPACT RESISTANT	WATERPROOF
TURBO	750 Lumens	1h 50min	156m (Max)	1m	IPX-6
HIGH	450 Lumens	3h 45min			
MID	300 Lumens	6h 20min			
LOW	100 Lumens	19h 30min			
FLASHING MODE	300 Lumens	14h			



BT30R

Max **1800** Lumens

BT30R rechargeable bike light is what you bring to a mountain bike descent. The light features 1800-lumen output with remote burst activation and the exclusive Dual Distance Beam System to help you see further and go faster.

- Dual Distance Beam System
- 1800-lumen neutral white output
- Instant burst with remote pressure switch
- Micro-USB rechargeable
- Compact aluminum housing

SIZE: 74.1mm×50.4mm×43.6mm (2.91``×1.98``× 1.71``)

WEIGHT: 147g (5.1 oz) excluding battery



New

ANSI/NEMA FL 1					
MODE	OUTPUT	RUNTIME	DISTANCE	IMPACT RESISTANT	WATERPROOF
BURST	1800 Lumens	/	170m (Max)	1m	IPX-6
TURBO	1200 Lumens	1h 50min			
HIGH	500 Lumens	5h 15min			
MID	200 Lumens	12h 50min			
LOW	100 Lumens	22h 35min			
FLASHING	200 Lumens	/			

BC30

Max **1800** Lumens

The Fenix BC30 Bike Light puts self-contained 1800-lumen max output at the ready. Remote Turbo activation and the exclusive Dual Distance Beam System make the BC30 effective on road or trail up to 170m. Choose 18650 rechargeable cells or CR123A batteries to power four brightness levels and a warning mode, all guarded by a rugged bar-mounted housing.

- Dual distance beam
- 1800-lumen burst mode
- Full aluminum housing
- Quick-release mounting system

SIZE: Length: 126.7mm (5") Width: 50mm (2") Height: 31.8mm (1.3")

WEIGHT: 161g (5.7 oz) excluding battery



ANSI/NEMA FL 1					
MODE	OUTPUT	RUNTIME	DISTANCE	IMPACT RESISTANT	WATERPROOF
BURST	1800 Lumens	/	170m (Max)	1m	IPX-6
TURBO	1200 Lumens	1h 50min			
HIGH	500 Lumens	5h			
MID	200 Lumens	11h			
LOW	100 Lumens	20h			
FLASHING	200 Lumens	/			

CAMP LANTERNS

Fenix camp lanterns are all about innovation and all around performance. From the ice cold north pole to the rainy tropical forest, the Fenix all-weather waterproof lanterns provide throughout uncompromised performance. Featuring from exclusive dual-fuel battery compartment to multifaceted globe and magnetic base, Fenix camp lanterns keep your adventure going anytime anywhere.



Photo credited by MenTu

CL25R

Max **350** Lumens

Need a powerful lantern to light up the entire base camp? Look no further than our CL25R rechargeable all-season camp lantern. Powered by one rechargeable 18650 Li-ion battery or two primary CR123A batteries, CL25R provides 350-lumen output and 1000-hour runtime in low output. The light also features additional red light, magnetic base for easy attachment and is also tripod mountable.

- 350-lumen output
- Micro-USB rechargeable
- Magnetic base for easy attachment
- Tripod mountable.
- Red flashing light and moonlight mode

SIZE: Length: 51mm (2 in.) Width: 51mm (2 in.)
Height: 100 mm (3.93 in.)

WEIGHT: 155 (5.46oz) excluding battery



ANSI/NEMA FL 1						
MODE	OUTPUT	RUNTIME		DISTANCE	IMPACT RESISTANT	WATERPROOF
		18650 Battery	CR123A Battery			
Turbo	350 Lumens	3h 10min	2h 15min	20m (Max)	1m	IPX-6
HIGH	200 Lumens	5h 45min	3h 30min			
MID	50 Lumens	25h 50min	15h 10min			
LOW	1 Lumens	1000h	600h			
FLASHING RED LIGHT	3 Lumens	/	/			

CL20 Max 165 Lumens

Designed with all-season campers in mind, the CL20 camping lantern supports AA battery and CR123A lithium battery to ensure optimum performance in cold seasons. The premium neutral white LEDs along with exclusive multifaceted globe provide 165-lumen anti-glare light for gear organization and other nighttime camping tasks. With built-in hanging loop and magnet for easy attachment, the additional red light equipped CL20 is a versatile companion whether on campsite or in tent.

- All-season performance
- Innovative battery compartment
- Multifaceted globe for maximum output and anti-glare lighting
- Neutral white output plus red light
- Built-in hanging loop and magnet for easy attachment

SIZE: Length: 78.4mm (3.1 in.) Width: 45.2mm (1.8 in.) Height: 59.1mm (2.3 in.)

WEIGHT: 103.2g (3.6 oz) excluding battery



ANSI/NEMA FL 1							
MODE	OUTPUT	RUNTIME			DISTANCE	IMPACT RESISTANT	WATERPROOF
		Ni-MH Battery	Alkaline Battery	CR123A			
TURBO	165 Lumens	2h 23min	3h 10min	2h	10m	1.5m	IPX-6
HIGH	100 Lumens	5h 15min	4h 9min	3h 31min			
MID	50 Lumens	11h 28min	9h 4min	7h 32min			
LOW	8 Lumens	71h 40min	56h 40min	46h 50min			
RED LIGHT	1.5 Lumens	27h 10min	24h 15min	20h			
SOS	1.5 Lumens	/	/	/			

ACCESSORIES

Fenix has been striving to develop some creative accessories to improve the performances of flashlights to the largest extent. At present, Fenix has several kinds of accessories (including diffuser tip, filter adapter, traffic wand, remote switch, etc) to satisfy the consumers' requirements.

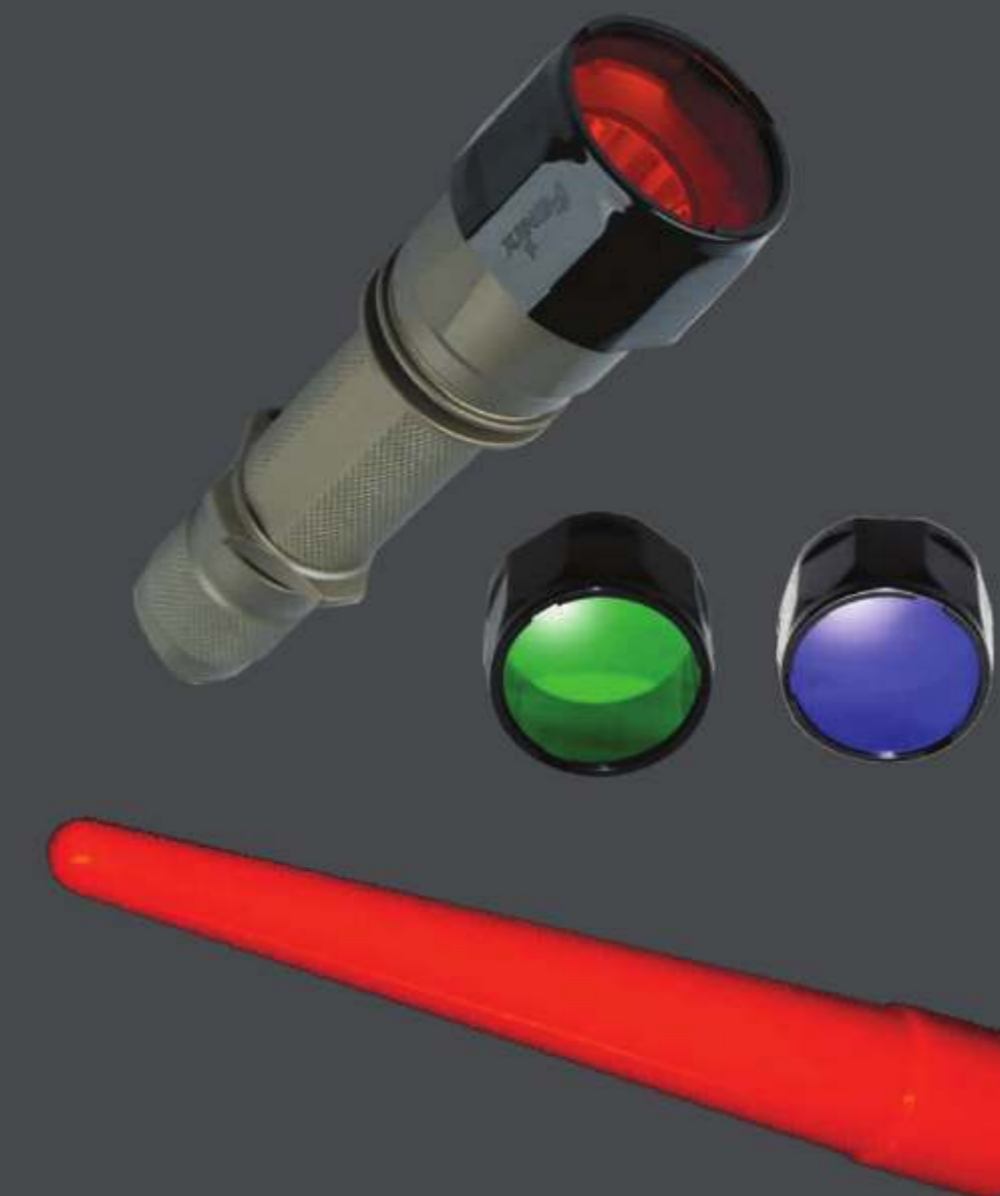


Photo credited by Zorin Denu

Filter Adapter (AOF-S/S+/M/L)

This is an accessory for Fenix flashlights which own outstanding filtration ability to maintain strong red light, and it could be used as signal lamp or weft when necessary.

- ✦ Uses a toughened ultra-clear glass lens with anti-reflective coating that provides heat resistance and maximum light penetrability
- ✦ Anti-roll design, easy to attach, easy to remove



Traffic Wand (AOT-S / M / L)

Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best option for emergency situations and traffic control.



Diffuser Tip (AOD-S / M / L)

Diffuser tips can soften the light and work as a camping light, signal light, reading light, tent light, etc.

- ✦ Durable, impact resistant and fireproof to V2 Standard



Camping Lampshade (AD 501 / 502)

The camping lampshade is a unique accessory specially designed for Fenix flashlights which converts your flashlight into an exquisite camping light immediately. Providing flood light with a wider range, it extremely caters for outdoor camping, hiking, daily use as well as reading in the darkness.

- ✦ Illuminates a hemisphere range with the opposite direction of the light beam High temperature resistance with favorable stability

Rechargeable Batteries (ARB-L2S, ARB-L2P, ARB-L2, ARB-L2M, ARB-L4)

Fenix rechargeable batteries are specially designed for the high-intensity flashlights. Featuring the large capacity, outstanding performance, great reliability and compact design, they are your best choice in various rechargeable Li-ion batteries.

- ✦ The battery has triple over-heat protection, safe and reliable
- ✦ Built-in over-charge, over-discharge protection circuit, ensures the max performance of the battery
- ✦ The circuit board has front and back protections, impact-resistant and more reliable



Model	Type	Capacity	Voltage
ARB-L4	26650	4800 mAh	3.7v
ARB-L2S	18650	3400 mAh	3.6v
ARB-L2P	18650	3200 mAh	3.6v
ARB-L2	18650	2600 mAh	3.7v
ARB-L2M	18650	2300 mAh	3.6v

Remote Pressure Switch (AER-02)

The Fenix remote pressure switch is specially designed for tactical flashlights—three sensors connected in parallel to the spring steel switch module for easy reliable activation. The flashlight is activated by applying slight finger pressure to the switch, and once pressure is released, the flashlight turns off. The 80cm cable (max length) allows for remote controlling of the flashlight, making it more agile and convenient for your tactical mission or hunting.



- ★ Durable for over 100,000 activations. Flashlight is activated by pressing any one of the four sensors.
- ★ Cable made from resilient PU material, 23cm in length when coiled, 80cm in length when expanded.
- ★ The tail cap is made from T6-grade aluminum with Type III hard-anodized finish for durability and scratch resistance.
- ★ Side switch in tail cap capable of longtime 1A electric current passing, which works separately with the pressure pad switch.
- ★ Water-proof to IPX-8 standard
- ★ The tail cap is 25.4mm in diameter, 40mm in length.
- ★ Pressure pad switch, cable and the tail cap weigh 53.2 grams total

Rail Mount (ALG-01)



- ★ Adjustable Diameter Design to Allow for Use with a Wide Range of flashlight
- ★ Universal Slide-on Flashlight Ring
- ★ With Plastic Spacer-Fits Flashlight Diameter 23.6mm- 24.2mm
- ★ Without Plastic Spacer-Fits Flashlight Diameter 25.4-26.0mm

Quick-release Bike Mount (ALB-10)

Utilizing the unique split-type design for quick release, Fenix ALB-10 bike mount can effectively reduce the flashlight mounting steps and shorten the time for mounting. Meanwhile, featuring the solidity and wide compatibility of Fenix bike mount, it will ensure your safety during your night riding.



- ★ Split-type design for quick release
- ★ Fits flashlights with diameter of 18mm—26mm
- ★ Rotating 30 degree design adjusts to any locking angle
- ★ High-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar
- ★ Anti-aging, solid and able to withstand extended exposure to sunlight and rain

TK75 Extended Runtime Kit

The TK75's runtime can be extended with the addition of body tube segments and battery holders. An extra TK75's runtime will be gained with the addition of each extended runtime kit.



- ★ Install the kit with the right direction
- ★ An extra TK75's runtime will be gained with the addition of each extended runtime kit
- ★ The use of more than three kits in one TK75 flashlight is not recommended

Advanced Multi-charger (ARE-C2)

ARE-C2 is an ultrafast universal charger capable of charging four different rechargeable batteries simultaneously while the LCD display keeps you informed with readouts of voltage and charging status. Utilizing our exclusive ultrafast charging technology, it takes only three and a half hours to fully charge four ARB-L2(2600mAh) 18650 rechargeable batteries.



- ★ Ultrafast charging technology
- ★ Compatible with various size of Li-ion, Ni-MH, Ni-Cd rechargeable batteries
- ★ LCD display for simultaneous readouts of voltage and charging status
- ★ Each of the four battery slots monitors and charges independently

Smart Battery Charger (ARE-C1)

Specially designed for 18650 rechargeable batteries, ARE-C1 features the constant-current charge which extends the lifespan of the battery. The built-in advanced safety features ensure your safety and the health of the battery. With the included car adapter, you can charge your batteries on the go.



- ★ Constant-current charge
- ★ Support AC charging and DC charging
- ★ Advanced safety features
- ★ Two independent charging channels

Car Adapter (ARW-10)

Compatible with ARE-C2 and ARE-C1



Rechargeable Battery Pack (ARP-L2)

Compatible with TK76,TK75,TK61
5200mAh/7.4V
USB rechargeable
USB output fore emergency power
Fuel-gauge
USB LED light



Emergency Whistle

Fenix turns a world of emergency preparedness experience with reliable lighting products into these high-output whistles. Whether injury, disaster or personal threats are present, the easy-blowing design takes 30% less effort to reach up to 120 decibels peak output. Pealess construction from food-grade stainless steel provides decades of confidence even in harsh outdoor environments.



- ★ Unique sounding chamber
- ★ Max 120-decibel sound intensity
- ★ Pore structure and pealess design
- ★ Made of food-grade stainless steel

MODEL	Filter Adapter			Diffuser Tip			Traffic Wand			Camping Lampshade		Rechargeable Battery		Remote Switch	Rail Mount	Bike Mount	MODEL			
	S	S+	M	L	S	M	L	S	M	L	501	502	L2/L2M L2P/L2S	ARB	L4	AER		ALG	ALB	10
TK-SERIES																				TK-SERIES
TK76													✓							TK76
TK75													✓							TK75
TK61													✓							TK61
TK51													✓							TK51
TK41																				TK41
TK35 Ultimate Edition													✓							TK35 Ultimate Edition
TK35													✓							TK35
TK32													✓							TK32
TK22													✓							TK22
TK15													✓							TK15
TK09													✓							TK09
PD-SERIES																				PD-SERIES
PD40																				PD40
PD35													✓							PD35
PD32													✓							PD32
PD22													✓							PD22
PD12													✓							PD12
LD-SERIES																				LD-SERIES
LD75													✓							LD75
LD60													✓							LD60
LD50													✓							LD50
LD41 2015 Edition													✓							LD41 2015 Edition
LD22													✓							LD22
LD12													✓							LD12
LD09													✓							LD09
LD02													✓							LD02
E-SERIES																				E-SERIES
E41																				E41
E35 Ultimate Edition													✓							E35 Ultimate Edition
E25													✓							E25
E20													✓							E20
E15													✓							E15
E12																				E12
E05																				E05
E05SS																				E05SS
E01																				E01
SD-SERIES																				SD-SERIES
SD10													✓							SD10
MC-SERIES																				MC-SERIES
MC11																				MC11
RC/UC-SERIES																				RC/UC-SERIES
RC40																				RC40
RC15																				RC15
UC50																				UC50
UC45																				UC45
UC40 Ultimate Edition													✓							UC40 Ultimate Edition
UC35													✓							UC35
HP-SERIES																				HP-SERIES
HP40F																				HP40F
HP40H																				HP40H
HP30																				HP30
HP25																				HP25
HP15 Ultimate Edition																				HP15 Ultimate Edition
HP12																				HP12
HP05																				HP05
HL-SERIES																				HL-SERIES
HL55																				HL55
HL50																				HL50
HL30 2015 Edition																				HL30 2015 Edition
HL25																				HL25
HL23																				HL23
HL10																				HL10
BT-SERIES																				BT-SERIES
BTR20																				BTR20
BT20																				BT20
BT30R																				BT30R
BC30																				BC30
CL-SERIES																				CL-SERIES
CL25R																				CL25R
CL20																				CL20

Model	LED	Max output	Max runtime	Brightness level	Waterproof	Dimension	Weight	Battery	Model
TK-SERIES									TK-SERIES
TK76	Cree XM-L2 U2/Cree XM-L2 T6	2800 lumens	200h	12 output levels	IPX-8	222 × 55 × 77mm (8.7 × 2.2 × 3 in.)	800g (28.2 oz)	4*18650	TK76
TK75	Cree XM-L2 U2	2900 lumens	200h	4 output levels	IPX-8	185 × 52.5 × 87.5mm (7.3 × 2 × 3.4 in.)	510g (18 oz)	4*18650	TK75
TK61	Cree XM-L2 U2	1000 lumens	300h	4 output levels	IPX-8	216 × 52.5 × 96mm (8.5 × 2.1 × 3.8 in.)	600g (21.2 oz)	4*18650	TK61
TK51	Cree XM-L2 U2	1800 lumens	400h	8 output levels	IPX-8	188 × 48mm (7.4 × 1.9 in.)	430g (15.2 oz)	3*18650	TK51
TK41	Cree XM-L2 U2	900 lumens	240h	4 output levels	IPX-8	214 × 40 × 62.5mm (8.4 × 1.6 × 2.5 in.)	320g (11.3 oz)	8*AA	TK41
TK35 Ultimate Edition	Cree MT-G2	1800 lumens	150h	6 output levels	IPX-8	165 × 44 × 52mm (6.5 × 1.7 × 2 in.)	265g (9.3 oz)	4*CR123A/2*18650	TK35 Ultimate Edition
TK35	Cree XM-L2 U2	900 lumens	140h	4 output levels	IPX-8	165 × 44 × 52mm (6.5 × 1.7 × 2 in.)	273g (9.6 oz)	4*CR123A/2*18650	TK35
TK32	Cree XM-L2 U2	900 lumens	150h	4 output levels	IPX-8	159 × 25.4 × 52mm (6.3 × 1 × 2 in.)	180g (6.3 oz)	2*CR123A/1*18650	TK32
TK22	Cree XM-L2 U2	920 lumens	150h	5 output levels	IPX-8	147 × 25.4 × 40mm (5.8 × 1 × 1.6 in.)	157g (5.5 oz)	2*CR123A/1*18650	TK22
TK15	Cree XP-G S2	400 lumens	171h	4 output levels	IPX-8	145 × 25.4 × 34mm (5.7 × 1 × 1.3 in.)	125g (4.4 oz)	2*CR123A/1*18650	TK15
TK09	Cree XP-G2 R5	450 lumens	65h	3 output levels	IPX-8	130 × 25.4 × 34mm (5.1 × 1 × 1.3 in.)	114g (4 oz)	2*CR123A/1*18650	TK09
PD-SERIES									PD-SERIES
PD40	Cree MT-G2	1600 lumens	120h	5 output levels	IPX-8	145 × 40mm (5.7 × 1.6 in.)	172g (6.1 oz)	1*26650	PD40
PD35	Cree XM-L2 U2	960 lumens	150h	6 output levels	IPX-8	139 × 25.4mm (5.5 × 1 in.)	87g (3.1 oz)	2*CR123A/1*18650	PD35
PD32	Cree XP-G2 R5	340 lumens	245h	4 output levels	IPX-8	127 × 24mm (5 × 0.9 in.)	65g (2.3 oz)	2*CR123A/1*18650	PD32
PD22	Cree XP-G2 R5	210 lumens	120h	4 output levels	IPX-8	89 × 21.5mm (3.5 × 0.8 in.)	44g (1.6 oz)	1*CR123A	PD22
PD12	Cree XM-L2 T6	360 lumens	60h	3 output levels	IPX-8	81 × 25.4mm (3.2 × 1 in.)	48g (1.7 oz)	1*CR123A	PD12
LD-SERIES									LD-SERIES
LD75	Cree XM-L2 U2 & XM-L color	4000 lumens	220h	10 output levels	IPX-8	158 × 52 × 74mm (6.2 × 2 × 2.9 in.)	430g (15.2 oz)	4*18650/8*CR123A	LD75
LD60	Cree XM-L2 U2	2800 lumens	150h	6 output levels	IPX-8	155 × 63 × 46mm (6.1 × 2.5 × 1.8 in.)	364g (12.8 oz)	3*18650/6*CR123A	LD60
LD50	Cree XM-L2 U2	1800 lumens	150h	6 output levels	IPX-8	138 × 53 × 27mm (5.43 × 2.08 × 1.06 in.)	220g (7.8 oz)	2*18650/4*CR123A	LD50
LD41 2015 Edition	Cree XM-L2 U2	960 lumens	200h	6 output levels	IPX-8	175 × 40mm (6.9 × 1.6 in.)	190g (6.7 oz)	4*AA	LD41 2015 Edition
LD22	Cree XP-G2 R5	215 lumens	150h	4 output levels	IPX-8	156 × 21.5mm (6.1 × 0.8 in.)	60g (2.1 oz)	2*AA	LD22
LD12	Cree XP-G2 R5	125 lumens	100h	4 output levels	IPX-8	105 × 21.5mm (4.1 × 0.8 in.)	54g (1.9 oz)	1*AA	LD12
LD09	Cree XP-E2	130 lumens	50h	4 output levels	IPX-8	92 × 19mm (3.6 × 0.7 in.)	33g (1.2 oz)	1*AA	LD09
LD02	Cree XP-E2	100 lumens	15h	3 output levels	IPX-8	76 × 15mm (3 × 0.6 in.)	16g (0.6 oz)	1*AAA	LD02
E-SERIES									E-SERIES
E41	Cree XM-L2 U2	1000 lumens	95h	4 output levels	IPX-8	116 × 40 × 44mm (4.56 × 1.57 × 1.73 in.)	204g (7.2 oz)	4*AA	E41
E35 Ultimate Edition	Cree XM-L2 U2	900 lumens	140h	4 output levels	IPX-8	130 × 24mm (5.1 × 0.9 in.)	72g (2.5 oz)	2*CR123A/1*18650	E35 Ultimate Edition
E25	Cree XP-E2	260 lumens	72h	3 output levels	IPX-8	146 × 24mm (5.7 × 0.9 in.)	73g (2.6 oz)	2*AA	E25
E20	Cree XP-E2	250 lumens	80h	3 output levels	IPX-8	160 × 26mm (6.3 × 1 in.)	94g (3.3 oz)	2*AA	E20
E15	Cree XP-E	170 lumens	36h	3 output levels	IPX-8	59.6 × 19.7mm (2.3 × 0.8 in.)	23g (0.8 oz)	1*CR123A	E15
E12	Cree XP-E	130 lumens	36h	3 output levels	IPX-8	90 × 19mm (3.5 × 0.7 in.)	28.5g (1 oz)	1*AA	E12
E05	Cree XP-E2	85 lumens	15h	3 output levels	IPX-8	66.5 × 15mm (2.6 × 0.6 in.)	12.5g (0.4 oz)	1*AAA	E05
E05SS	Cree XP-E2	85 lumens	15h	3 output levels	IPX-8	66.5 × 15mm (2.6 × 0.6 in.)	32g (1.1 oz)	1*AAA	E05SS
E01	Nichia	13 lumens	16h 30min	1 output levels	IPX-8	71 × 14.2mm (2.8 × 0.6 in.)	14g (0.5 oz)	1*AAA	E01
SD-SERIES									SD-SERIES
SD10	Cree XM-L2 T6	930 lumens	14h	3 output levels	100-meter submersible	144 × 26 × 40 mm (5.7 × 1 × 1.6 in.)	160g (5.6oz)	2*CR123A/1*18650	SD10
MC-SERIES									MC-SERIES
MC11	Cree XP-G2 R5	155 lumens	90h	3 output levels	IPX-8	99 × 21.5 × 25mm (3.9 × 0.8 × 1 in.)	64.8g (2.3 oz)	1*AA	MC11
RC/UC-SERIES									RC/UC-SERIES
RC40	Cree XM-L U2	3500 lumens	160h	5 output levels	IPX-8	299 × 54 × 108mm (11.8 × 2.1 × 4.3 in.)	1310g (46.2 oz)	Built-in 7800mAh/7.4V rechargeable Li-ion battery	RC40
RC15	Cree XM-L U2	860 lumens	100h	4 output levels	IPX-8	168 × 25.4 × 42mm (6.6 × 1 × 1.7 in.)	245g (8.6 oz)	Built-in 2600mAh/3.7V rechargeable Li-ion battery	RC15
UC50	Cree XM-L2 U2	900 lumens	120h	4 output levels	IPX-8	181 × 25.4 × 40mm (7.1 × 1 × 1.6 in.)	248g (8.7 oz)	Built-in 3400mAh/3.7V rechargeable Li-ion battery	UC50
UC45	Cree XM-L2 U2	960 lumens	135h	5 output levels	IPX-8	178 × 25.4 × 40.4mm (7 × 1 × 1.6 in.)	224g (7.9 oz)	Built-in 3200mAh/3.6V rechargeable Li-ion battery	UC45
UC40 Ultimate Edition	Cree XM-L2 U2	960 lumens	150h	5 output levels	IPX-8	147 × 25.4mm (5.8 × 1 in.)	144g (5.1 oz)	Built-in 3400mAh/3.7V rechargeable Li-ion battery	UC40 Ultimate Edition
UC35	Cree XM-L2 U2	960 lumens	150h	6 output levels	IPX-8	150 × 25.4mm (5.9 × 1 in.)	99g (3.5 oz)	1*18650/2*CR123A	UC35
HP-SERIES									HP-SERIES
HP40F	Cree XP-E2 M3/XP-G2 R5	450 lumens	280h	8 output levels	IPX-6	76 × 55.7 × 31.5mm (3" × 2.2" × 1.2")	280.5g (9.9 oz)	4*CR123A/2*18650	HP40F
HP40H	Cree XP-E2 P3&XP-G2 R5	450 lumens	160h	8 output levels	IPX-6	76 × 55.7 × 31.5mm (3" × 2.2" × 1.2")	183.5g (6.5 oz)	4*AA	HP40H
HP30	Cree XM-L2	900 lumens	300h	4 output levels	IPX-6	69.9 × 55.9 × 43.8mm (2.8" × 2.2" × 1.7")	276.5g (9.7 oz)	4*CR123A/2*18650	HP30
HP25	Cree XP-E	360 lumens	220h	7 output levels	IPX-6	76 × 55.7 × 31.5mm (3" × 2.2" × 1.2")	183.5g (6.5 oz)	4*AA	HP25
HP15 Ultimate Edition	Cree XM-L2	900 lumens	170h	6 output levels	IPX-6	67.4 × 55.9 × 34.7mm (2.7" × 2.2" × 1.4")	154.2g (5.4 oz)	4*AA	HP15 Ultimate Edition
HP12	Cree XM-L2 U2	900 lumens	145h	5 output levels	IPX-6	62.1 × 41.2 × 33.3mm (2.4" × 1.6" × 1.3")	145g (5.1 oz)	1*18650/2*CR123A	HP12
HP05	CREE XP-G R5	350 lumens	135h	4 output levels	IPX-6	54.3 × 48.9 × 32.9mm (2.1" × 1.9" × 1.3")	161g (5.7 oz)	3*AA	HP05
HL-SERIES									HL-SERIES
HL55	Cree XM-L2 T6	900 lumens	100h	5 output levels	IPX-8	84 × 46 × 48mm (3.3" × 1.8" × 1.9")	115g (4.1 oz)	2*CR123A/1*18650	HL55
HL50	Cree XM-L2 T6	365 lumens	150h	4 output levels	IPX-8	63.8 × 32 × 30mm (2.5" × 1.3" × 1.2")	57g (2 oz)	1*CR123A/1*AA	HL50
HL30 2015 Edition	Cree XP-G2 R5	230 lumens	160h	7 output levels	IPX-6	70 × 47.5 × 37.5mm (2.8" × 1.9" × 1.5")	86.6g (3.1 oz)	2*AA	HL30 2015 Edition
HL25	Cree XP-G2 R5	280 lumens	140h	4 output levels	IPX-8	66 × 45 × 47mm (2.6" × 1.8" × 1.9")	90.3g (3.2 oz)	3*AAA	HL25
HL23	Cree XP-G2 R5	150 lumens	110h	3 output levels	IPX-8	71 × 38.9 × 40mm (2.8" × 1.5" × 1.6")	52g (1.8 oz)	1*AA	HL23
HL10	Cree XP-E	70 lumens	27h	3 output levels	IPX-8	69.5 × 29.2 × 28.2mm (2.7" × 1.1" × 1.1")	45.2g (1.6 oz)	1*AAA	HL10
BT-SERIES									BT-SERIES
BTR20	Cree XM-L T6	800 lumens	20h	4 output levels	IPX-6	69.2 × 44.2 × 56.6mm (2.7" × 1.7" × 2.2")	311g (11 oz)	Built-in 2600mAh/7.4V rechargeable Li-ion battery	BTR20
BT20	Cree XM-L T6	750 lumens	19h 30min	4 output levels	IPX-6	67.8 × 42.9 × 56.6mm (2.7" × 1.7" × 2.2")	121g (4.3 oz)	2*18650/4*CR123A	BT20
BT30R	Cree XM-L2	1800 lumens	22h 35min	6 output levels	IPX-6	74.1 × 50.4 × 43.6mm (2.9" × 2" × 1.7")	147g (5.2 oz)	Rechargeable battery pack included	BT30R
BC30	Cree XM-L T6	1800 lumens	20h	4 output levels	IPX-6	126.7 × 50 × 31.8mm (5" × 2" × 1.3")	161g (5.7 oz)	2*18650/4*CR123A	BC30
CL-SERIES									CL-SERIES
CL25R	Premium Neutral white LEDs	350 lumens	1000h	5 output levels	IPX-6	51 × 51 × 100mm (2" × 2" × 3.9")	155g (5.5 oz)	1*18650/2*CR123A	CL25R
CL20	Premium Neutral white LEDs	165 lumens	24h15min	6 output levels	IPX-6	78.4 × 45.2 × 59.1mm (3.1" × 1.8" × 2.3")	103.2g (3.6 oz)	2*AA/1*CR123A	CL20

Fenix will exert every effort to provide the perfect service to the users to ensure you a cheerful experience.

Fenix concerns your problems and difficulties when you are using our products, we will try our best to provide all-around service and supports to you via our official website, customer service E-mail and questionnaire survey.

Fenix Product Warranty Terms

1. 15-day free replacement: Fenix will replace a light within 15 days of purchase for any manufacturing defects if problems come into being in normal use; we will replace the light with the same model. If the model has been discontinued, customers will receive a product of similar function and equal or greater value.

2. 24-month free repairs: Fenix will offer free repair within 24 months from the date of purchase if problem develop with normal use.

3. Limited lifetime warranty: If the repair is required after 24 months from the date of purchase (including the additional warranty period), a repair quote will be proposed before repair. The total repair fee is assessed according to the cost of the replaced materials.

4. Extended warranty service: Fenix kindly suggest that customers register their product on the official website: www.fenixlight.com. The customers will get an extra six months warranty service once registered successfully. 30 months of free repairs in total will be available.

5. Warranty certificate: Customers can get the after-sale service from Fenix distributors or dealers by providing with a complete Fenix warranty card, purchase invoice or receipt. The distributors should provide services to the customers and Fenix will support for these services.

For any problems and suggestions, please e-mail to our customer service department

service@fenixlight.com (Europe/America areas) service_1@fenixlight.com (Asia/Oceania/Africa areas)

Tel: +86 400-8866-093 +86-755-29631193

The warranty term may be modified without prior notice, please subject to the latest version on Fenix official website: www.fenixlight.com. Fenixlight limited reserves the rights of modification and final interpretation.

1. What should I do if the flashlight flickers or doesn't turn on?

Here is basic flashlight troubleshooting procedure:

First, try fresh battery and check the battery polarity.

Second, make sure all parts are screwed in all the way and the body is not screwed reversely.

Third, clean all contacts with alcohol and a Q-tip: inside the head, spring(s), tube ends and threads.

Fourth, using a metal object such as a paper clip or key, then remove the tail cap and connect the end of the battery with the end of the tube. If the light comes on, you most likely have a defective switch. Then please contact the seller or email us at service@fenixlight.com for customer service.

2. Why the flashlights become hot after running for a long time?

The flashlights can get hot to the touch if left on for extended periods of time, because LED will generate heat even though operating at much lower temperatures. So never leave the flashlights unattended and never leave them where children can gain access to them.

3. Can the battery be kept inside the illumination tool if the battery is used up or not used for a long time?

The battery should be taken out from the illumination tool and kept in a dry place with low temperature if the illumination tool is not used for a long time. If not, the system will still make the battery discharge at a low current. It will reduce the service life of the battery or cause battery leakage.

4. Where can I repair my flashlight?

Repairs should be done through the authorized distributor in your country. Please take or send your lights to the distributor. For distributor closest to you, please contact Fenix at:
service@fenixlight.com (For Europe and America)
service_1@fenixlight.com (For Asia, Oceania and Africa)
 PLEASE HAVE YOUR SERIAL NUMBRE AVAILABLE.

5. How do I register my Fenix Product?

From Sep. 2008, all the products manufactured by Fenix have been marked with a unique 11-digit Serial Number, consisting of letters and numbers (e.g. 1LS5VM00323), you can find the SN on the head of Fenix lights or the package. When you input the S/N on serial number inquiry, the related information will be displayed.

With the SN, you can register your Fenix products online: www.fenixlight.com

If it is difficult to finish registration, please contact Fenix at e-mail:

service@fenixlight.com (For Europe and America)

service_1@fenixlight.com (For Asia, Oceania and Africa)

6. Where can I buy Fenix lights or become a distributor of Fenix?

You can find Fenix products in outdoor shops or on website. To find the Fenix retailer closest to you or to be a distributor, please e-mail to info@fenixlight.com