

## About AceBeam T15S

- This AceBeam T15S flashlight's versatile modes of output are easily accessible by simply rotating the head part, and can get the output from low to the high brightness which you want directly.
- Generous knurling throughout the surface of the entire light ensures good grip when you most need it.
- There are two springs on the head and tail cap for shock damping-This light is ready to be weapon mounted.
- Conforms to IPX-8 standard:1.5 meters.
- Removable grip ring, clip, and crenellated stainless steel strike bezel for different applications
- A tactical 'clicky' switch is fully exposed in the tailcap for easy access, even when wearing gloves.

2

## Features


- LED: Cree XM-L2 U2 with a lifespan of 50,000hours
- Use one 18650 or 2\*CR123A
- Rated operation voltage 3v to 12v
- Crenellated SS bezel
- Removable SS clip
- Copper base plate for more efficient heat dissipation
- Shiny smooth reflector and get perfect beam
- Max light output: 1000umens . when use 2\*CR123A rechargeable batteries. Max output for 3 mins and then down to 85%
- Max runtime: 130hours(9.4 lumens)  
Runtime: 90 minute for 1-18650 down to 50%.  
47minutes down to 50%(3CR123A )
- Max beam distance:281m
- Peak beam intensity:19700lux
- Impact resistance:1.2m
- Waterproof to IPX-8 standard
- Size(mm):151.2(length)x35(bezel)x25.4(Body dia.)
- Weight: 148g( without battery)
- Made of durable aircraft grade aluminum
- Premium Type III hard-anodized anti-abrasive finish
- Toughened ultra-clear glass lens with anti-reflective coating
- Battery reverse protection function. And batteries low indication(it will flash when voltage down to 2.7v)

Notice: The above-mentioned parameters ( tested with a 3400mAh Li-Ion battery) are approximate and may vary between flashlights, batteries, and environments.

3

## Operation

- Tactical Lighting/Momentary On  
Half press the tail cap button, the flashlight will turn on temporarily; release the button at the tail cap, the flashlight will turn off.
- ON/OFF Switching  
Switch ON: Press the push button down completely until a "click" sound is heard and flashlight turns on.  
Switch OFF: Press the push button down a second time until a "click" sound is heard and light is turned off
- Mode Switching  
when the push button down, press the side button and will get high-middle-lower-strobe in turn.  
when the push button is off, press the side button and will get strobe directly.
- Battery Replacement  
1, Unscrew the tail cap in counter-clockwise direction.  
2, Insert the battery into the body.  
3, Screw the tail cap back tightly in a clockwise direction.

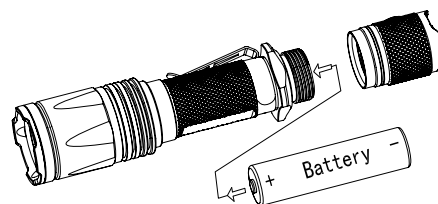

4

## Usage and Maintenance

- Please don't disassemble the sealed head, doing so can cause damage to the flashlight.
- High-power flashlights need batteries capable of high current electric discharge. We strongly recommend use rechargeable batteries for their high performance.
- Please take your battery out of the flashlight if you will not use the light for a long time, or the power of the battery has run out. Otherwise, some poor batteries may leak and damage the light.
- Please replace the O-ring if it becomes damaged after using for a long time, and regularly lubricate the O-rings so as to not erode the rubber. Doing so will also keep the flashlight properly sealed against water;
- Clean the contacts of your light periodically, especially when the flashlight flickers abnormally or cannot light up  
There may be several reasons as follows:  
**Reason 1:** the batteries need to be replaced  
**Solution:** replace batteries ( confirm the correct installation of anode and cathode).  
**Reason 2:** The threads, PCB board contact or other contacts are dirty.  
**Solution:** clean the contact points with an alcohol soaked cotton swab.  
If the above methods do not solve the issue, contact your distributor and refer to the warranty policy.

5

## Product Warranty

Acebeam guarantees flashlight against defects in material and workmanship. Flashlight products that are found to be defective under normal use within 24 months of the period of purchase date will be repaired or replaced without charge. This warranty does not cover damage caused by accident, unreasonable use or product alteration. Failure to follow the general maintenance directions could result in damage to your flashlight that may not be covered by Supbeam warranty.

If this flashlight should prove defective, the product will be repaired or replaced under the above terms, please contact Supbeam or your original Supbeam dealer for warranty return instructions.

## Warning

T15S is a high intensity lighting device and capable causing eye damage, avoid shining the light directly into the eyes.

SHENZHEN MICROBLUEBEAR TECHNOLOGY CO., LTD


Tel: +86-0755-28101361

http://www.acebeam.com

E-mail: info@acebeam.com

Address: Longhua Industrial Park No. 3 Baoan District, Shenzhen City, Guangdong, China

6

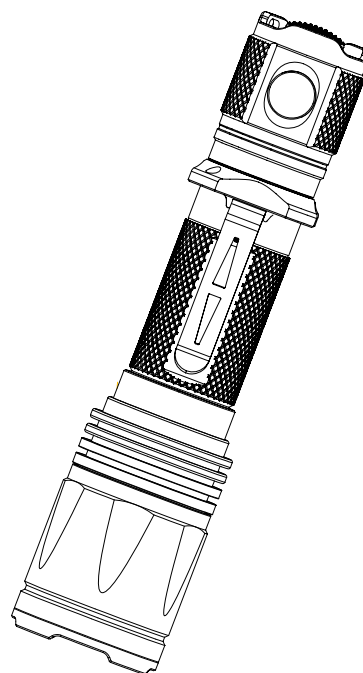

**AceBeam T15S**

Max 1000 Lumens

User manual

1